


SELF PROPELLED ARTICULATING BOOM LIFTS From 11m-26m working height




ARTICULATING BOOMS: It has all the above features but with moderate outreach as compared with Telescopic Booms. In addition they are used for reaching up and over machinery, equipment and other floor mounted obstacles and for reaching other elevated positions not easily approached by Telescopic Booms. They are driveable at full elevation and have chassis widths that provide access to narrow industrial aisle-ways and congested work areas.

Model	800 AJ	600 AJ	Z 60/34	Z45/25J	450 AJ	Z 45/25EJ	Z30/20N	Z20/8N
Working height	26.38m	20.54m	20.10m	15.91m	15.72m	15.80m	11.00m	8.10m
Platform height	24.38m	18.54m	18.30m	13.91m	13.72m	13.80m	9.10m	6.10m
Horizontal outreach	15.7m	12.3m	10.40m	7.70m	7.47m	7.70m	6.40m	2.60m
Platform size	1.83x0.91m	2.44x0.91m	1.82 x 0.76m	1.83x0.76m	1.83x0.76m	1.83x0.76m	1.17x0.76m	1.02x0.79m
SWL / Lift capacity	230kg	227kg	227kg	227kg	227kg	227kg	227kg	200kg
Power Option	Diesel	Diesel	Diesel	Diesel	Diesel	Electric	Electric	Electric
Rotation	Continuous	360°	Continuous 360°	359°	Non-Continuous 360°	359°	359°	359°
Closed height	3.00m	2.54m	2.54m	2.08m	2.26m	2.00m	2.00m	2.00m
Closed width	2.44m	2.44m	2.29m	2.24m	2.08m	1.75m	1.20m	0.81m
Closed length	11.12m	8.94m	7.92m	6.80m	6.53m	6.80m	5.10m	3.80m
Weight	15,030kg	10,069kg	10,004kg	6,352kg	7,484kg	7,305kg	6,577kg	4,876kg
Drive Option/Tires	4 x 4 / RT	4 x 4 / RT	4 x 4 / RT	4 x 4 / RT	4 x 4 / RT	NM	NM	NM

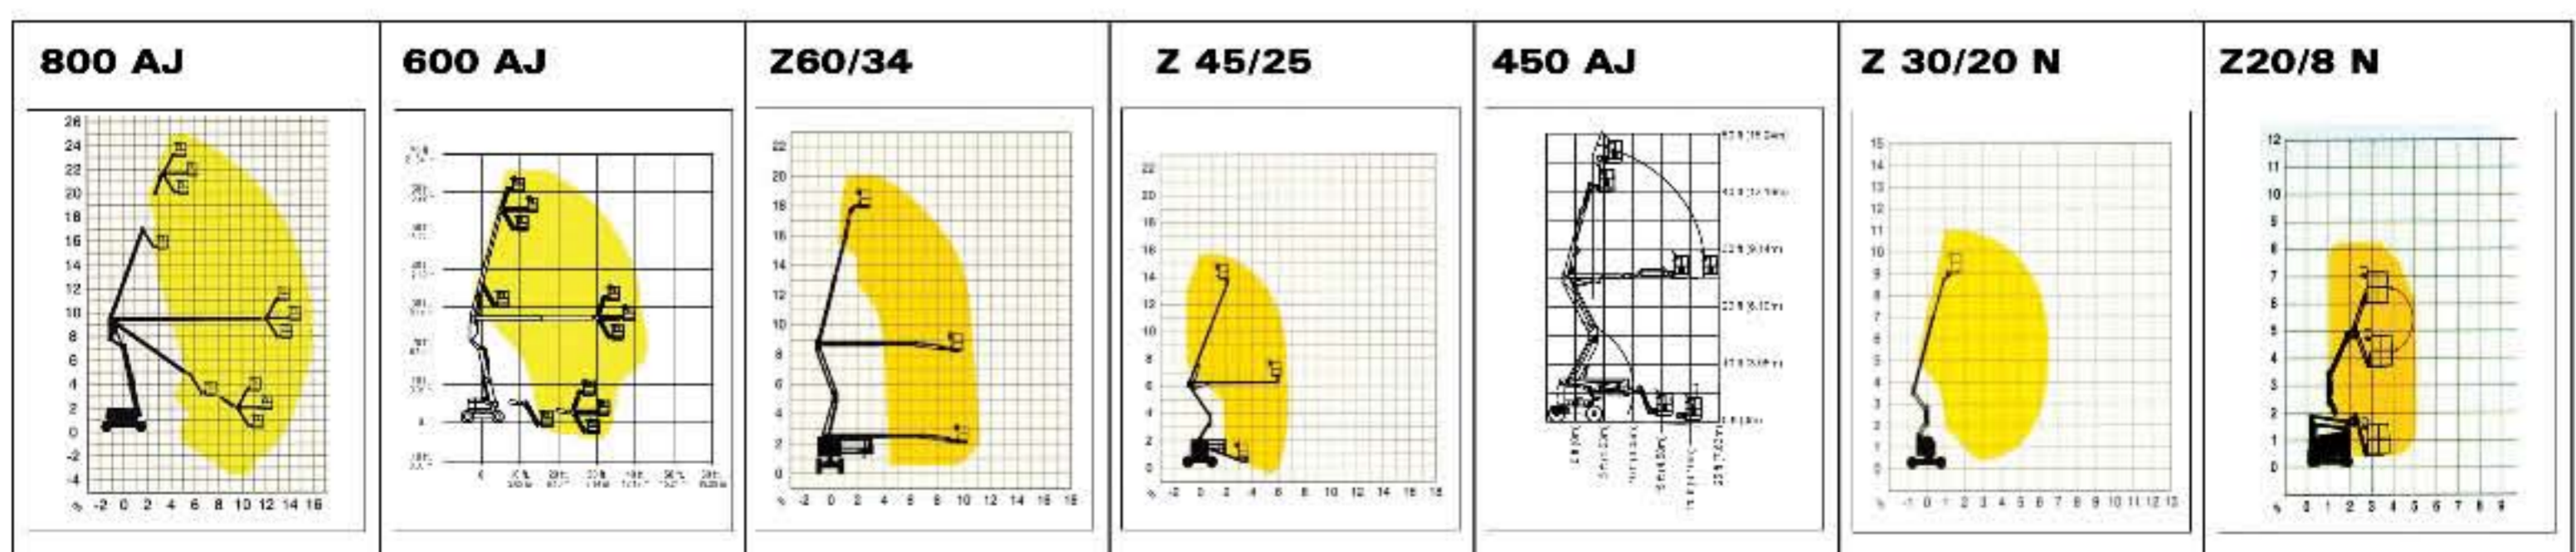

SELF PROPELLED TELESCOPIC BOOM LIFTS From 14m-40m working height



TELESCOPIC BOOMS:  Used for applications that require high outreach capability. The machine's turntable may be rotated 360° in either direction. The boom can be raised or lowered from vertical to below horizontal and extended while the work platform remains horizontal and stable. It can be maneuvered forward or backward and steered in any direction by the operator from the work platform, even while the boom is extended.

Model	S 125  	860 SJ  	S 85  	660 SJ  	S 65  	S 45  
Working height	40.10m	28.21m	27.90m	22.32m	21.80m	15.70m
Platform height	38.10m	26.21m	25.90m	20.32m	19.80m	13.70m
Horizontal outreach	24.40m	22.85m	23.40m	17.30m	17.20m	11.20m
Platform size	2.44 x 0.91m	2.44m x 0.91m	1.83 x 0.76m	2.44m x 0.91	1.83 x 0.76m	1.83 x 0.76m
SWL / Lift capacity	227kg	227kg	227kg	277kg	227kg	227kg
Power Option	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel
Rotation	Continuous 360°	Continuous 360°	Continuous 360°	Continuous 360°	Continuous 360°	Continuous 360°
Closed height	3.07m	3.05m	2.80m	2.57m	2.74m	2.50m
Closed width	2.49m (3.35 extended)	2.49m	2.43m (3.04 extended)	2.41m	2.44m	2.30m
Closed length	12.17m	12.19m	12.40m	10.21m	9.40m	8.50m
Weight	20,248kg	16,511kg	16,266kg	12,519kg	12,882kg	6,709kg
Drive Option/Tires	4 x 4 / RT	4 x 4 / RT	4 x 4 / RT	4 x 4 / RT	4 x 4 / RT	4 x 4 / RT

