


## HDV SELF OPERATED TRUCK MOUNTS From 17m-27m working height



**SELF OPERATED HDV TRUCK MOUNTS:** are generally telescopic boom lifts mounted on a truck and offer greater flexibility where there is a need to be geographically mobile and where the time available to carry out work at the height is limited. These machine can be self operated and driven after receiving proper training.

- HDV truck mounts are available from 17 to 27 meters and can only be driven by the holder of heavy duty license.



Model	T27K	T22K	T18K	T17K	T20M
Working height	27.00m	22.00m	18.20m	17.00m	20.00m
Platform height	25.00m	20.00m	16.20m	15.00m	18.00m
Outreach-high SWL	15.00m	11.50m	13.70m	8.50m	7.00m
Platform size	1.39 x 0.9m	1.60 x 0.75m	1.40 x 0.70 m	1.40 x 0.70m	1.40 x 0.70m
SWL / high	250kg	265kg	250kg	200kg	200kg
Power	PTO/Gearbox	PTO/Gearbox	PTO/Gearbox	PTO/Gearbox	PTO/Gearbox
Rotation	Continuous	Continuous	Continuous	Continuous	Continuous
Working width-full	3.25m	3.25m	3.30m	3.30m	2.57m
Closed height	3.45m	3.40m	3.35m	3.35m	2.90m
Closed width	2.50m	2.50m	2.50m	2.50m	2.20m
Closed length	9.70m	8.78m	7.80m	7.80m	7.21m
Weight	17,000kg	7,500kg	7,500kg	6,000kg	4,500kg

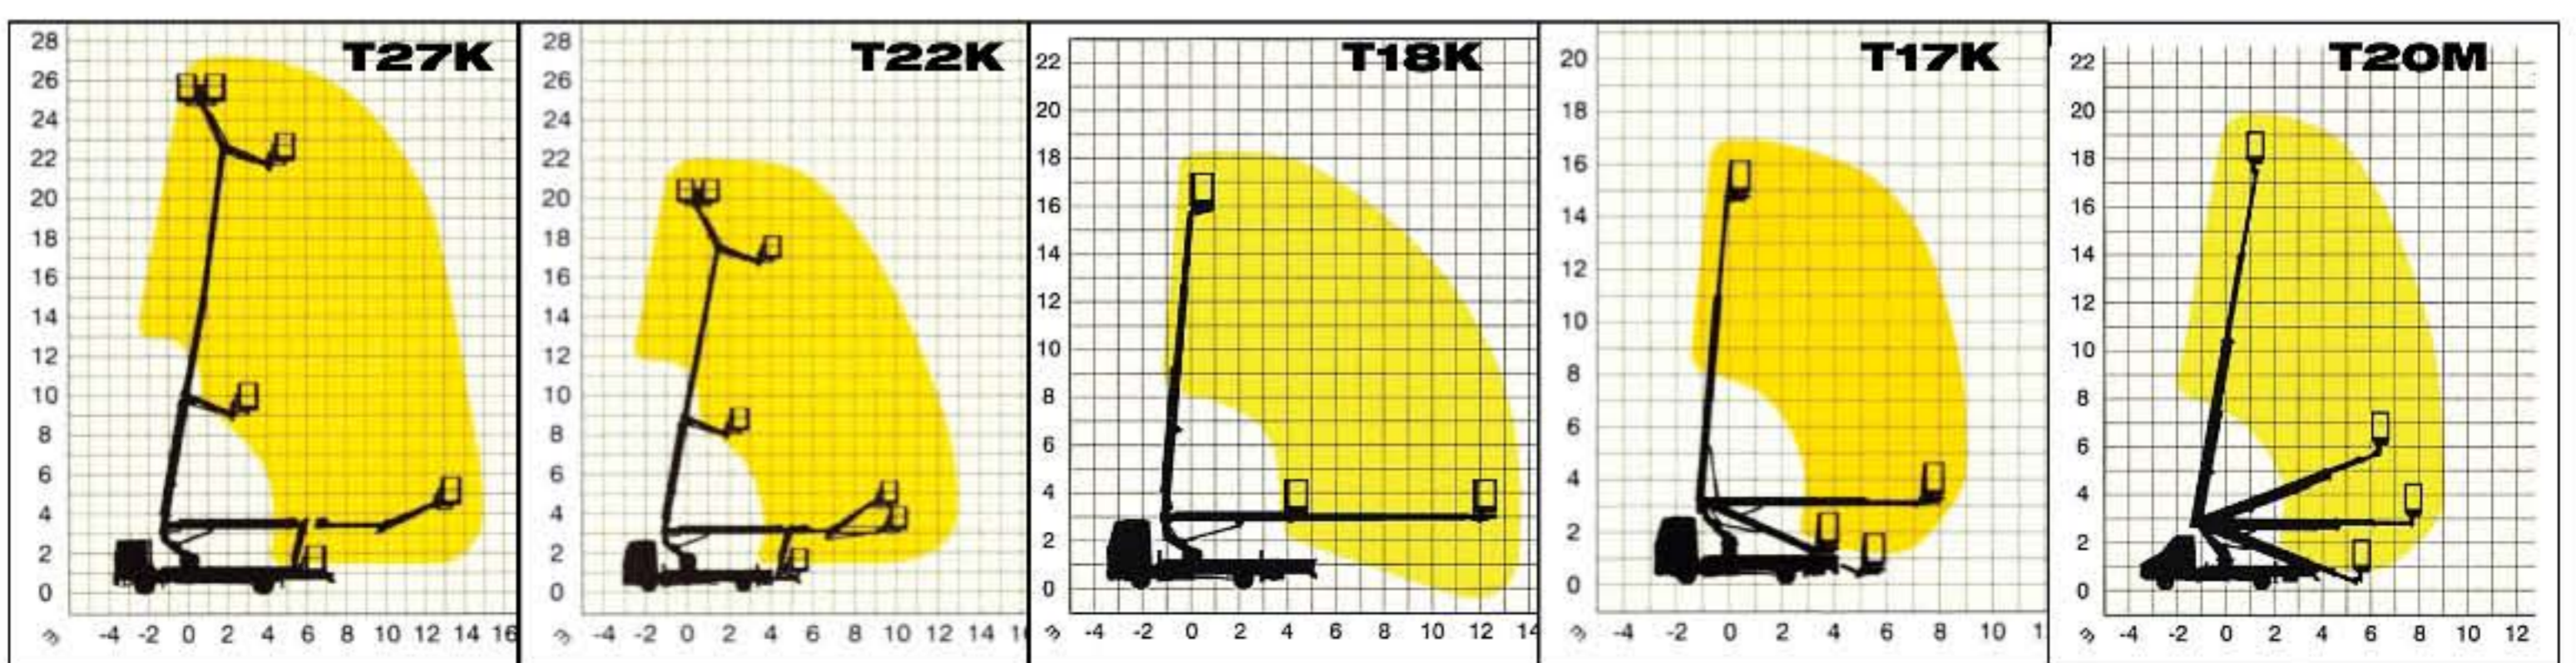

## OPERATOR ASSISTED TRUCK MOUNTS From 34m-44m working height



**OPERATOR ASSISTED TRUCK MOUNTS:** are used for very high level application and are available in working height range of 34m and 44m. Machines are supplied with dedicated operators who are trained by the manufacturer and have vast experience in this field. These machines are irreplaceable for jobs such as outdoor broadcasting, stadium lighting, telecommunication, cleaning, lighting, decoration and industrial maintenance. They may also be used for unique construction and erection jobs.

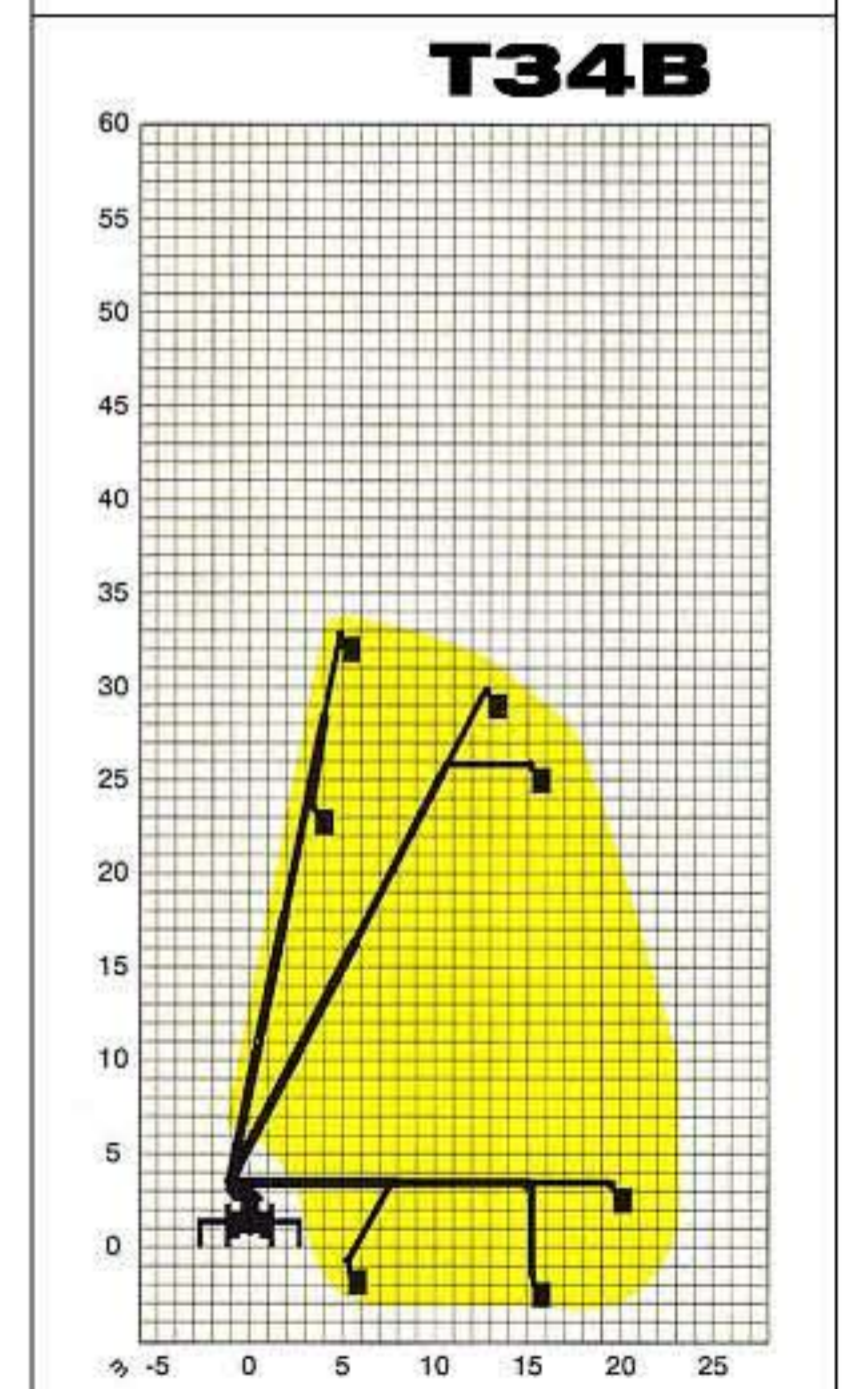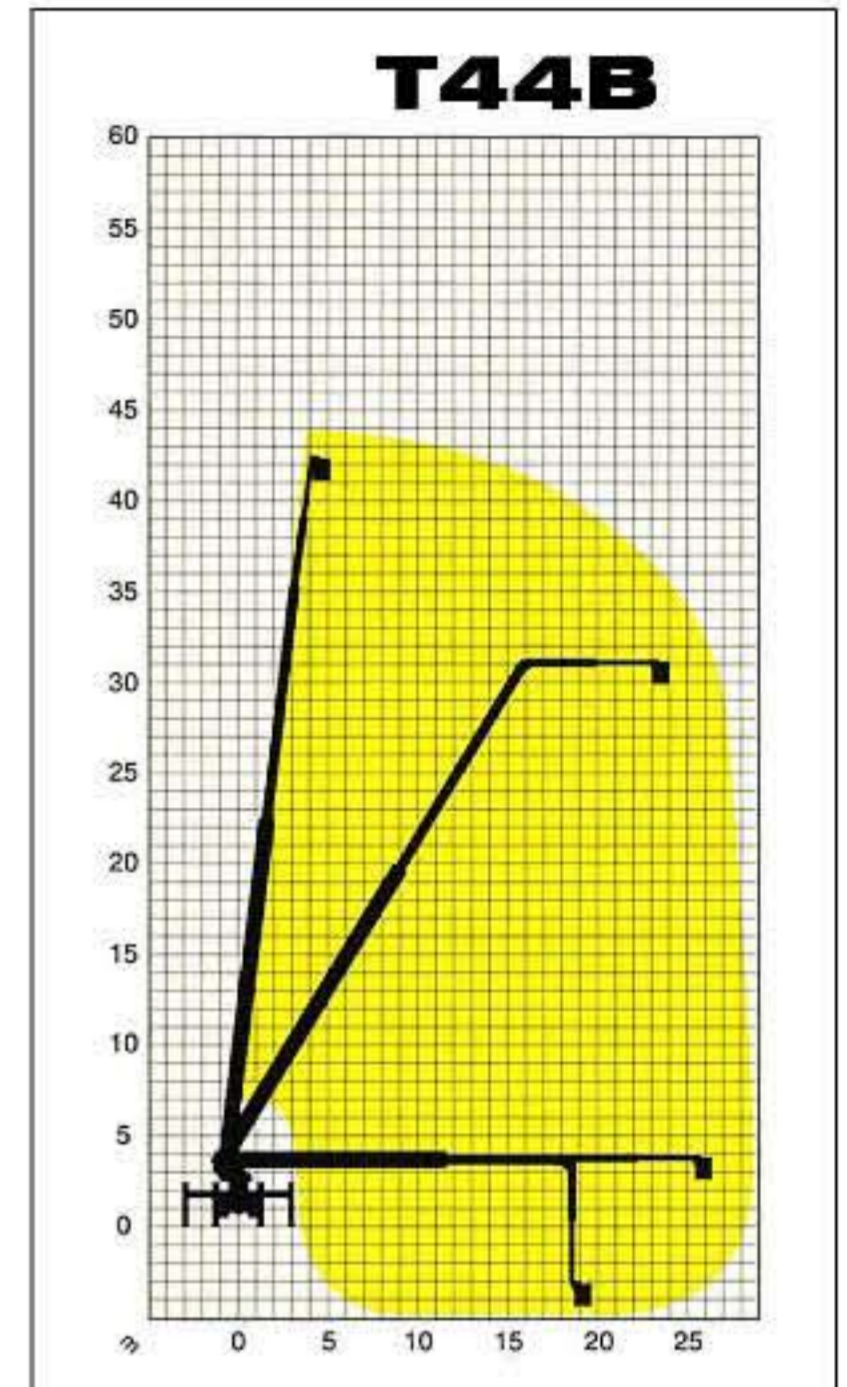

Model	T44B	T34B
Working height	44.00m	34.00m
Platform height	42.00m	32.00m
Outreach-high SWL	27.80m	22.70m
Outreach-low SWL	29.70m	24.70m
Reach below ground	5.00m	3.60m
Platform size	2.00 x 0.90m	1.80 x 1.00m
SWL-high	450kg	280kg
SWL-low	200kg	180kg
Power	Diesel	Diesel
Rotation	Continuous	+/- 280°
Working width-full	6.00m	5.10m
Working width-one side	4.10m	3.80m
Closed height	3.83m	3.70m
Closed width	2.50m	2.50m
Closed length	11.77m	9.53m
Weight	32,000kg	17,000kg