

Rapid Access

Powered Access Selection Guide

contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Welcome to our powered access selection guide. Inside you'll find all the information you need to begin working safely and effectively at height.

To get you started we've included comprehensive guidance on our leading product range, as well as advice on the accessories, innovations and training that'll help you succeed on your next task or project.

Remember, if you want to get in touch with us at any point whilst you're browsing, you can give us a call with any enquiries, feedback or hire requests.

contact@rapidaccess-gulf.com
rapidaccess-gulf.com




How to use this Product Selection Guide

This guide is designed to help you select and order the correct piece of equipment for your needs.

Each section is conveniently separated by product type and machines are arranged in order of ascending height.

The working envelope and height/reach indicator will provide a quick visual reference to assist your equipment selection.

If you cannot find exactly what you're looking for, need more information, or wish to order equipment, call our expertly trained staff on **contact@rapidaccess-gulf.com**

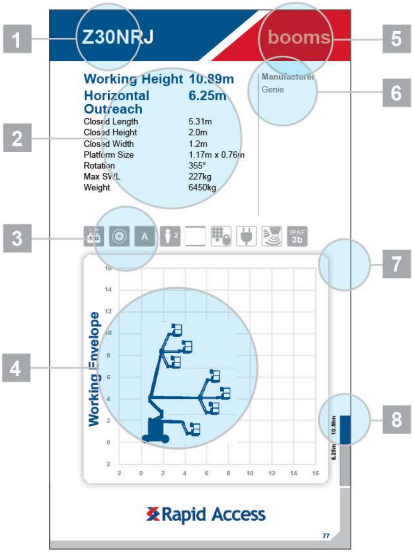

Height and outreach

- Working height
- Horizontal outreach

Optional extras

- SkySiren®
- SkySiren® PCS™
- SkySentry™
- SkyRak®
- SkyRakPlus®
- SkyRakBoom®
- SkyTel™
- SkyScreen™
- MHA Material Handling Attachments
- Power to platform
- Generator
- Camera pod
- Circular camera cage
- Wendy lighting frame

Key

Standard features

- Battery power
- Diesel power
- Lithium battery
- Hybrid power
- Dual fuel option
- Gas power option
- Rough terrain (2 wheel drive)
- Rough terrain (4 wheel drive)
- IPAF 1a licence type
- IPAF 1b licence type
- IPAF 3a licence type
- IPAF 3b licence type
- IPAF PAV licence type
- Tracked
- Mast boom
- Articulating boom
- Straight telescopic boom
- Non-marking tyres
- Outrigger legs
- Maximum people in cage*
- Push around vehicles
- Operator powered
- Indoor use only
- Self drive
- JIB rotation
- Driving licence type

* Two numbers refer to indoor or outdoor use, call us for details

1 Product Code

Unique reference number for product.
(Please note this will not necessarily correspond with the original manufacturer's model number or product code)

2 Specification

These details include product dimensions, Safe Working Load (SWL), platform area, rotation and machine weight.

3 Key

These symbols indicate standard features and optional extras available to hire with the platform. See left for key table.

4 Working Envelope

This shows the area of working space provided by the product.

5 Product Type

Indicates classification of powered access unit, e.g. machine types: low level access, scissor lift, boom lift, truck mounted platform, specialist boom or telehandler.

6 Alternative Machines

Indicates alternative or similar machines.

7 Working Height

The blue column indicates the safe operating vertical height.

8 Horizontal Outreach

The grey column indicates the safe operating outreach.

The Product Selection App from Rapid Access



To download our FREE App search for ‘Rapid Access’ on the App Store

1. Select the direction required...
2. Where you’re working...
3. The ground conditions and surface types...
4. Any access restrictions or considerations...
5. And the maximum height and reach you need.



Visit your app store and search for ‘Rapid Access’

Download on the App Store GET IT ON Google Play

Contents

Use this guide to find your perfect powered access solution.

Each section in this guide has been created to allow you to browse, select and order your ideal machine, attachments and accessories.

Information	4 - 9
Welcome	4
Useful Numbers	5
Global Reach	6
Choosing a Machine	7
Equipment Selection	8 - 9
Safety Value Chain	11 - 13
Training	14 - 15
Preventing Unauthorised Use	16
Operator Safety	17
Controlling Materials at Height	18 - 24
Maintenance & Inspection Processes	25

Product Specification	**27 - 154**
Low Level Access	27 - 38
Scissor Lifts	39 - 74
Boom Lifts	75 - 134
Tracked Boom Lifts	135 - 144
Truck Mounted	145 - 150
Telehandlers	151 - 154
Useful Information	**155 - 162**
Distance Conversion	157
Weight Conversion	158
Index	
By Product Code	159 - 160
By Machine Type	161-162

Welcome

We are Rapid Access, the Middle East's largest provider of powered access solutions which includes access platform hire, equipment sales and IPAF training.

We're proud to offer you the widest selection of powered access equipment in the region, including a complete range of boom lifts, scissor lifts, low level access platforms and truck mounted platforms. We also provide a fleet of track mounted booms and specialist equipment, such as tracked access and narrow spider machines, to fulfil all your access platform requirements.

We operate from nine depot locations across six GCC countries, supplying a diverse fleet of more than 4,500 machines to enable safe, productive and successful work at height.

With safety, productivity and convenience at the heart of all we deliver, our products and services can help you to achieve your working at height goals, whatever the task.

Use this guide as a starting point for selecting your powered access solution.



Useful Numbers

Depot Locations

Middle East	Dubai	800 222 377
	Abu Dhabi	800 222 377
	Qatar	+974 404 19888
	Kuwait	+965 220 87811
	Bahrain	+973 177 06036
	Oman	+968 220 35350
	Saudi Arabia	800 1 222 377
International Projects		+971 4 885 9090



Global Reach

Global business dedicated to local service

Rapid Access is a subsidiary of the Loxam Group. Loxam and its subsidiaries have a network of 750 branches in 21 countries and benefits from the third largest fleet of powered access equipment worldwide. This international coverage and extensive range of specialist equipment ensures constant quality of service and advice.

All Loxam branches are staffed by highly trained professionals who understand even the most specialised needs and are committed to delivering local support throughout all stages of the hire regardless of where the customer is located.

Should you have a project outside the GCC that you require assistance with, please call your local Rapid Access depot.

For more information regarding the Loxam Group www.loxamgroup.com







Choosing a Machine

Product Overview

Whether you're new to powered access, or work with the machine every day, we're here to help you find the ideal solution for working at height.

With so many different types of machines available to get you to the height you need, look to us for complete guidance on your ideal hire.



Low Level Access
Offering working heights up to 5.1m, low level access equipment is ideal for indoor applications including retail, warehouse and facilities management. Many models can easily fit into lifts and through standard doors.



Scissor Lifts
Delivering working heights from 8m to 18m, we offer scissor lifts suitable for indoor and outdoor use.



Boom Lifts
Our boom range includes straight and articulating models with working heights from 8m to 57m, with a variety of power options available.



Track Mounted Boom Lifts
We have specialist platforms and spider lifts available for working in a range of indoor and outdoor environments, including finished or uneven terrain.



Truck Mounted Lifts
Truck mounted lifts make it possible to work from public highways and can easily be moved from site to site.



Attachments and Accessories
Our pioneering range of innovations and accessories enable you to overcome the challenges posed by work at height, including material handling, entrapment, unauthorised machine use and more.

Equipment Selection

Considerations in selecting the right equipment for your task.

Before you get started, it's essential you make sure you have the right training to work safely and legally. See page 14 to learn more about our training services.

1

Height & Outreach

Do I need to reach a height straight up or do I need to reach up and then over?

For vertical access, scissor lifts may be best. When working over racking and shelving, mast booms are ideal. When working over obstacles, articulated booms provide a versatile solution.

2

Environment

Will I be working indoors or outdoors?

Use a zero emission electric machine indoors, and in general a diesel machine outdoors. For versatility, consider a dual fuel unit.


3

Terrain

What are the ground conditions I'll be working on?

If you're working indoors, consider non-marking tyres. On rough terrain select a four wheel drive option and select outriggers on sloping ground.

To help you find the ideal machine for your next job; visit our website and use our New to Platforms selector, download our new product selector App, or call us at your nearest depot.

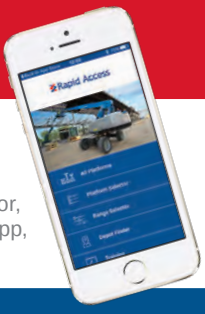

4

Access

Are there any access restrictions to entering the working environment?

Do machines have to pass through doorways and lift shafts? Does the site have plant weight restrictions?

5

Working height

How far up and how far out do I need to reach?

Always check the working envelope diagrams to ensure the outreach required can be achieved at the height(s) you need to carry out your task. Also consider that maximum working heights are assumed as 2m above the platform height (feet level).

6


Hire duration

How long do I need a machine for?

We offer machine hires from one day to many years, as well as equipment for outright purchase.



Safety Value Chain

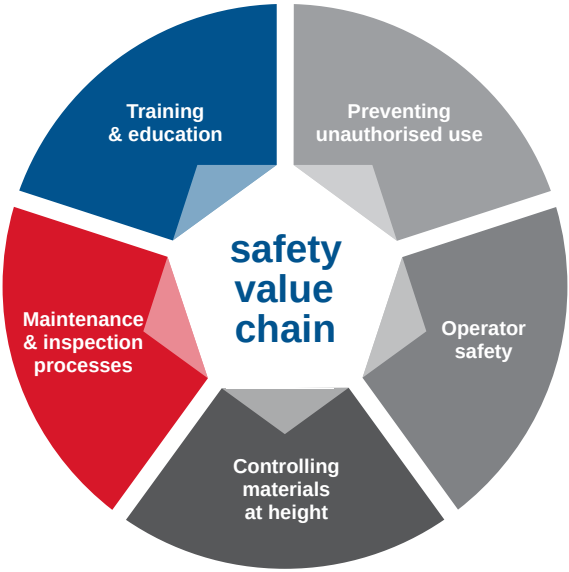

Contact our hire team for expert advice and assistance

contact@rapidaccess-gulf.com

rapidaccess-gulf.com

Safety Value Chain




Safety Value Chain

At Rapid Access, we believe in helping our customers to ensure they achieve maximum benefit from their use of powered access equipment.

We call this our ‘Safety value chain’.

This complete approach to safe and effective working at height has been designed to help your business achieve best practice on every site, project and task.

The sections below and in the following pages, describe our unique Safety Value Chain.

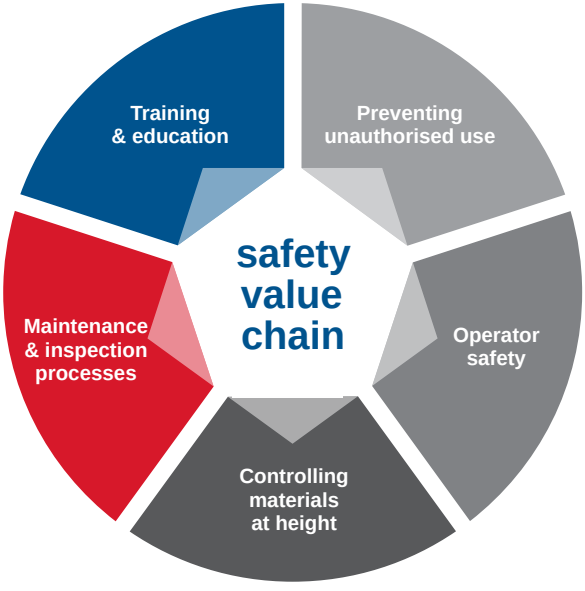

Training

Training Courses



With more IPAF instructors, training centres and experience in delivering courses than anyone else, you can rely on us to get you trained and ready to work safely on your next project.

Our IPAF Operator courses are available to complete at training centres across the GCC and can even be held on your own site.

1a Static Vertical Personnel Platform



1b Static Boom



3a Mobile Vertical



3b Mobile Boom



Push Around Vertical (PAV)



Advanced Operator Training

PAL+

Our complete range of training courses are ideal for anyone looking for advanced or specialist training.

Our additional range of training for powered access users includes:

IPAF MEWPs for Managers

The essential one day course for individuals managing, supervising or planning work at height.




We also offer a complete range of courses accredited and approved by:

Learn more about our complete range of training courses by visiting **rapidaccess-gulf.com/training**

Preventing Unauthorised Use



SkySentry™



SkySentry™ is a simple and effective fleet management system designed to help you reduce costs, drive efficiency and improve safety.




SkySentry™ is a full service system designed to improve the management of your powered access fleet across multiple sites and safeguard against unauthorised use.

The system offers unrivalled access and visibility of not only who is operating a machine at any one time. But also if they are correctly trained and authorised to do so.

Look for the SkySentry icon to identify which machines can benefit from this feature.

Learn more about SkySentry by visiting
rapidaccess-gulf.com/safety-and-innovations/skysentry

SkySiren®



The SkySiren® is the pioneering Secondary Guarding solution from Rapid Access; designed to reduce the risks associated with entrapment.

When an operator enters into an entrapment scenario, SkySiren® has been designed to simultaneously stop the motion of the platform and trigger a flashing light and warning siren. This allows the operator to attempt self rescue, meanwhile alerting colleagues and people on the ground that they need to carry out an emergency lowering procedure.





The unique pressure sensitive system, acts as an 'emergency switch' in an entrapment situation. It is designed to react to the body pressure of an operator trapped against the boom lift's control panel and prevent further involuntary operation of the machine.


The SkySiren® is a CE Certified retro-fit system capable of being fitted to most boom-type MEWPs.

Look for the SkySiren® icon to identify which machines can benefit from this unique attachment.

Learn more about SkySiren® by visiting
rapidaccess-gulf.com/safety-and-innovations/skysiren

Controlling Materials at Height

To aid the safe and effective installation of a range of materials at height, we are pleased to provide a unique range of award-winning Material Handling Attachments (MHAs).



Attachments in our range provide solutions to aid the installation, maintenance, and dismantling of a range of materials at height, including piping, ducting, steel and timber beams and cladding.


All of our MHAs have been designed to provide the following benefits:

- Minimise the risk of manual handling related injuries to operators
- Facilitate the safe and secure transit of materials from floor to point of work
- Minimise the risk of materials falling from height
- Aid the safe and efficient handling of materials at height



SkyRak®

Fits most small electric scissor lifts to enable the fast and safe installation of materials up to 150kg (300kg if fitted as double and MEWP capacity allows). Materials are securely fastened using the straps provided.







The unique design of the SkyRak® means the load weight is transferred to the platform floor, avoiding materials being rested on the non-load bearing hand-rails.

SkyRak® fits most small electric scissor lifts to enable the fast and safe installation of materials at height.

Look for the SkyRak® icon to identify which machines can benefit from this unique attachment.

Learn more about SkyRak® by visiting
rapidaccess-gulf.com/safety-and-innovations/skyrak






Rapid Access


Controlling Materials at Height

SkyRakPlus®

SkyRakPlus® allows materials up to 600kg to be safely stored on most large decked diesel scissor lifts, with no weight put on the MEWP handrail.



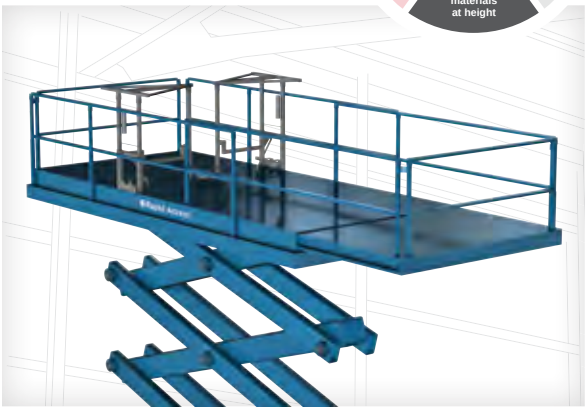



A system of flexible heads support a wide variety of materials of many shapes and sizes including pipes, ducting, cladding, steelwork and bus bars.

When the MEWP is in motion, the materials are secured by use of moveable pins and straps.

Look for the SkyRakPlus® icon to identify which machines can benefit from this unique attachment.


Learn more about SkyRakPlus® by visiting
rapidaccess-gulf.com/safety-and-innovations/skyrakplus


Rapid Access

Controlling Materials at Height

SkyRakBoom®

SkyRakBoom® allows the safe storage of materials up to 90kg in weight. Materials are stored with no weight on the MEWP's handrails.







Whilst the boom is in operation, materials are safely secured using the straps provided which significantly reduces the risk of materials falling to the ground.

SkyRakBoom® is suitable for installation to all standard Genie 1.8m and 2.4m 'boom-type' baskets.


BOOM

Look for the SkyRakBoom® icon to identify which machines can benefit from this unique attachment.

Learn more about SkyRakBoom® by visiting **rapidaccess-gulf.com/safety-and-innovations/skyrakboom**

Maintenance & Inspection Processes

Rapid Access aims to achieve world class standards of equipment preparation and reliability. Our approach begins with providing a safe and productive working environment and is underpinned by an ongoing commitment to seek best practice and drive innovation.



The pioneering processes that make a difference:

Technical Excellence (TechX)

TechX is our business' commitment to delivering the highest technical standards in all of our depots, regardless of their size or location.

That's why all of our depots are maintained to the highest levels of organisation and cleanliness, making them look different to many of the other depots you will have seen anywhere in the world.

It's by taking the extra steps to manage our locations that we can guarantee the equipment we provide to keep you safe is given the careful and close management it deserves.

Planned Preventative Maintenance (PPM)

As a leader in the supply of powered access, we know that our engineering expertise is paramount in delivering the service that puts your wellbeing first. PPM is our unprecedented approach to enhancing the reliability and effectiveness of our fleet by targeting the equipment that we believe requires greater attention. That means we're able to resolve issues before they ever even become visible.

What's more, we know that a machine meeting our highest technical standards will also be the safest machine we can provide.



Low Level Access



Contact our hire team for expert advice and assistance

contact@rapidaccess-gulf.com

rapidaccess-gulf.com

Low Level Access

- Working heights up to 6.2m
- Lightweight models from 184kg
- Non marking tyres for use on finished floors
- Versatile and easy to use
- Suitable for confined spaces
- Push around units available for ultimate control and manoeuvrability
- Powered and non-powered access platforms available

For more information please call your local depot (refer to page 5) or visit **rapidaccess-gulf.com**



Working Height 3.5m

Closed Length	0.98m
Closed Height	1.55m
Closed Width	0.75m
Platform Size	0.72m x 0.60m
Max SWL	150kg
Weight	180kg

Alternative machines


NANO
NANO SP
NANO SP+
Pecolift
PowerTower

Manufacturer

PowerTower

Indoor use only



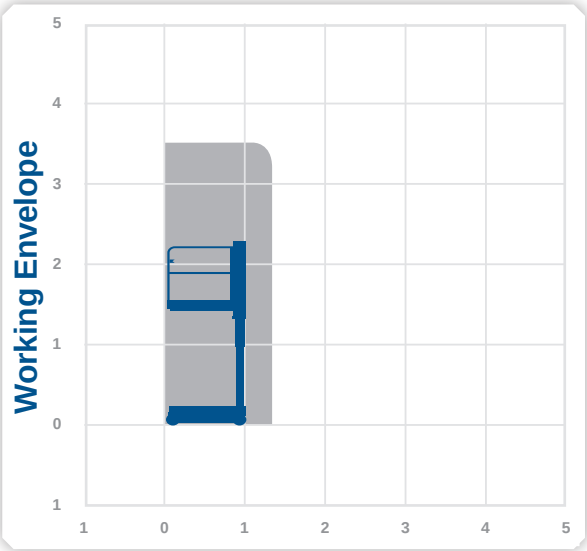

Rapid Access

ECOLIFT

low level

Working Height 4.2m

Closed Length	1.28m
Closed Height	1.95m
Closed Width	0.74m
Platform Size	0.85m x 0.64m
Max SWL	150kg
Weight	305kg

Alternative machines


ECO WR

Manufacturer

PowerTower

Indoor use only



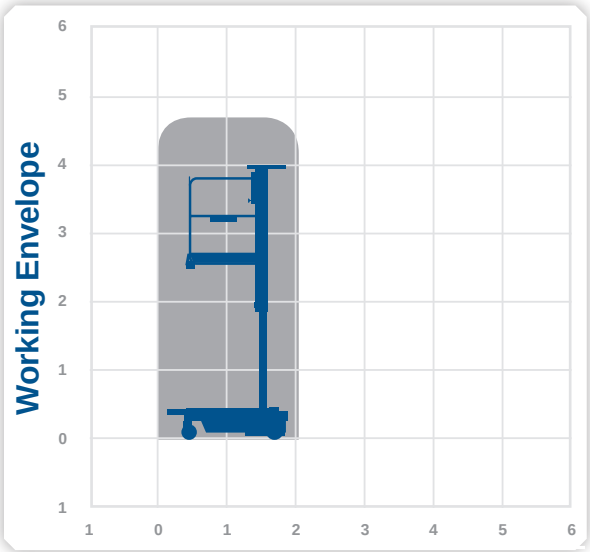

4.2m

contact@rapidaccess-gulf.com
rapidaccess-gulf.com

ECO WR

low level

Working Height 4.2m

Closed Length	1.28m
Closed Height	1.95m
Closed Width	0.74m
Platform Size	0.85m x 0.64m
Max SWL	150kg
Weight	305kg

Alternative machines


Ecolift

Manufacturer

PowerTower

Indoor use only



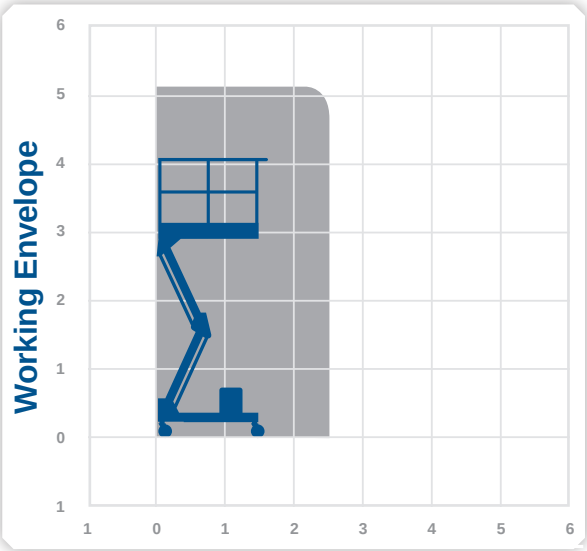

4.2m

Rapid Access

NANO low level

Working Height 4.5m


Closed Length	1.195m
Closed Height	1.56m
Closed Width	0.75m
Platform Size	1.0m x 0.73m
Max SWL	200kg
Weight	285kg

Alternative machines
Nano SP
Nano SP+
Pecolift
Power Tower

Manufacturer
PowerTower

Indoor use only



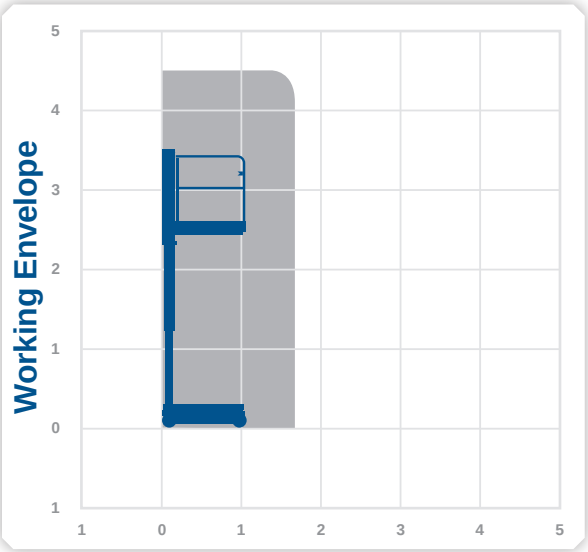

4.5m

contact@rapidaccess-gulf.com
rapidaccess-gulf.com

NANO SP

low level

Working Height 4.5m

Closed Length	1.2m
Closed Height	1.59m
Closed Width	0.75m
Platform Size	1.0m x 0.73m
Platform Length – deck extended	1.5m
Max SWL	200kg
Weight	506kg


Alternative machines

NANO
NANO SP+
Pecolift
Power Tower

Manufacturer

PowerTower



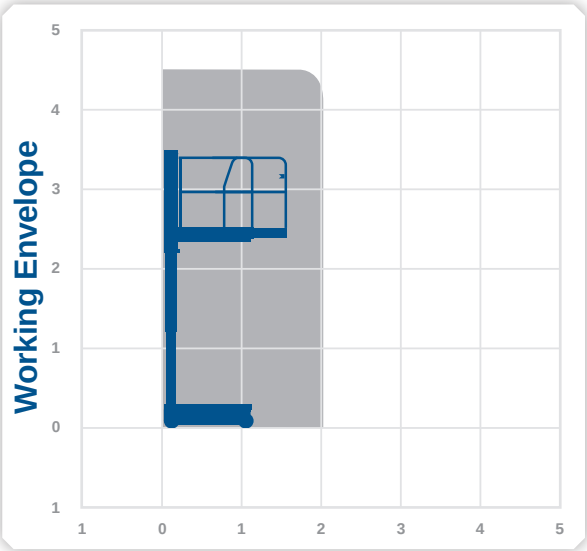

Rapid Access

NANO SP+ low level

Working Height 4.5m

Closed Length	1.2m
Closed Height	1.59m
Closed Width	0.75m
Platform Size	1.0m x 0.73m
Platform Length – deck extended	2.0m
Max SWL	200kg
Weight	540kg


Alternative machines

NANO
NANO SP

Manufacturer

PowerTower



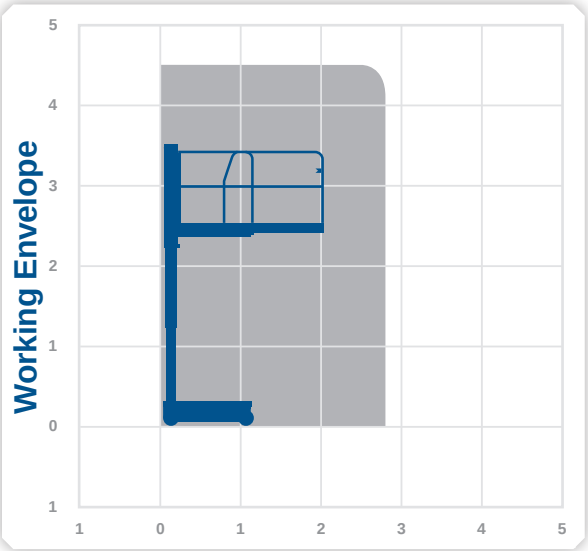

4.5m

contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Working Height 5.1m

Closed Length	1.6m
Closed Height	1.92m
Closed Width	0.78m
Platform Size	1.52m x 0.65m
Max SWL	250kg
Weight	342kg

Alternative machines


NANO
NANO SP
NANO SP+
Pecolift

Manufacturer

PowerTower

Indoor use only



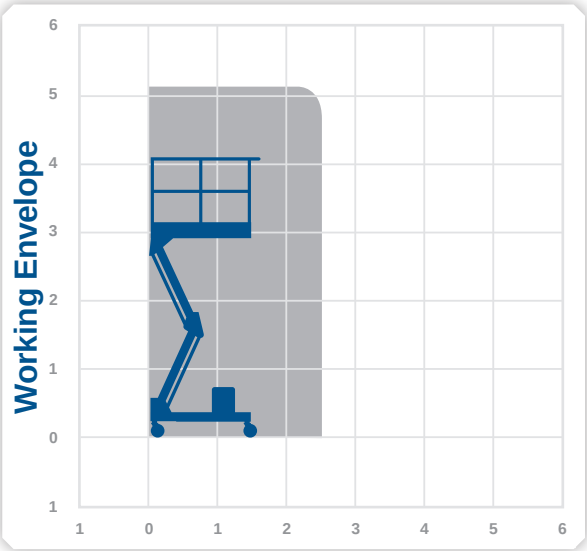

5.1m

Rapid Access

GR12

low level

Working Height 5.58m

Closed Length	1.35m
Closed Height	1.79m
Closed Width	0.76m
Platform Size	0.89m x 0.75m
Platform Length - deck extended	1.35m
Max SWL	227kg
Weight	862kg

Alternative machines


NANO SP
GR15

Manufacturer

Genie

Indoor use only



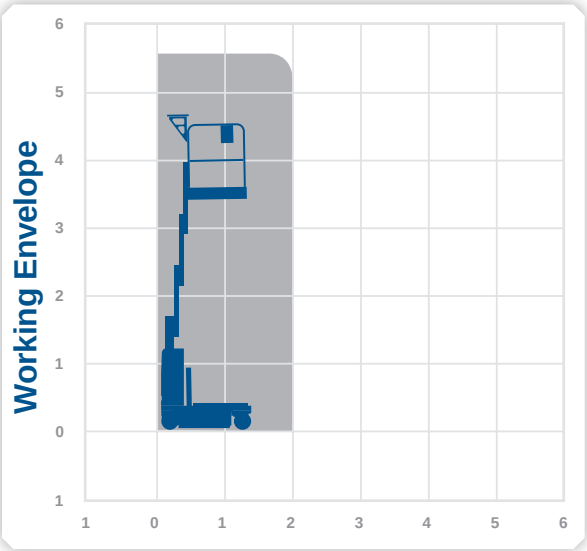

5.58m

contact@rapidaccess-gulf.com
rapidaccess-gulf.com

GR15

low level

Working Height 6.62m

Closed Length	1.45m
Closed Height	1.79m
Closed Width	0.76m
Platform Size	0.94m x 0.75m
Platform Length – deck extended	1.4m
Max SWL	227kg
Weight	1141kg

Alternative machines


NANO SP

Manufacturer

Genie

Indoor use only



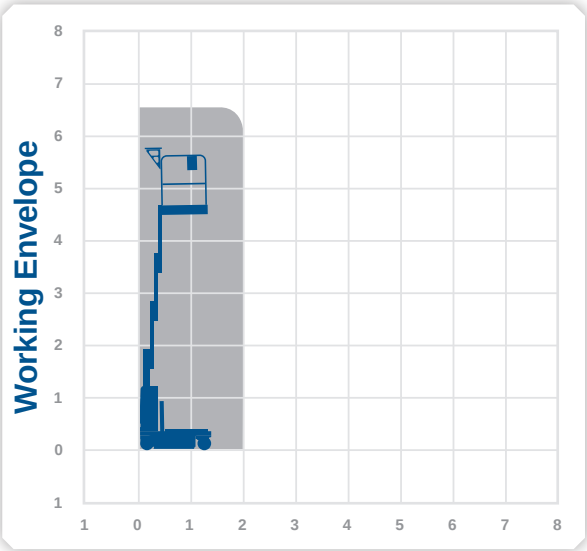

6.62m

Rapid Access



contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Scissor Lifts



Contact our hire team for expert advice and assistance

contact@rapidaccess-gulf.com

rapidaccess-gulf.com

Scissor Lifts

- Working heights from 8m to 18m
- Lightweight and compact machines
- Direct drive electric machines for greater efficiency
- Double deck and rough terrain
- Variety of power options
- Narrow aisle machines for access to confined areas
- Non-marking tyre option for work on finished floors
- Models with 680kg SWL
- Lightweight models from 1,312kg
- Power to platform available

For more information please call your local depot (refer to page 5) or visit **rapidaccess-gulf.com**



Working Height 7.8m

Closed Length	1.78m
Closed Height	2.11m
Stowed Height (guardrails lowered)	1.64m
Closed Width	0.81m
Platform Size	1.63m x 0.71m
Platform Length (deck extended)	2.53m
Max SWL	227kg
Weight	1312kg


Alternative machines

GS1932
GS2032

Manufacturer

Skyjack



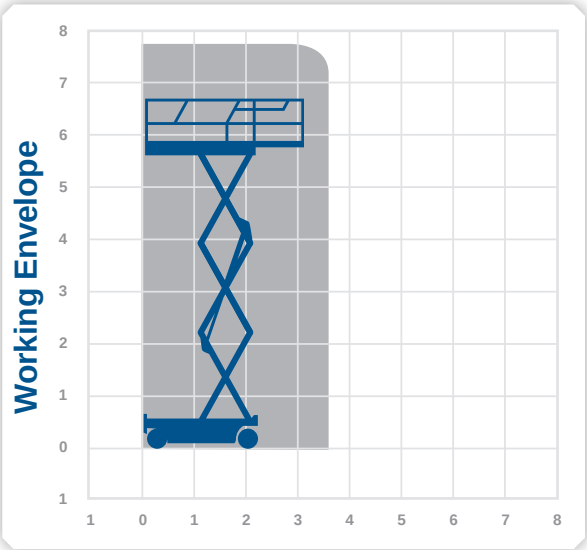

Rapid Access

Optimum 8 scissors

Working Height 7.8m

Closed Length	1.9m
Closed Height	1.98m
Stowed Height (guardrails lowered)	1.98m
Closed Width	0.79m
Platform Size	0.74m x 1.72m
Platform Length (deck extended)	2.59m
Max SWL	230kg
Weight	1520kg

Alternative machines


3220
GS1932
GS20

Compact 8

Manufacturer

Haulotte



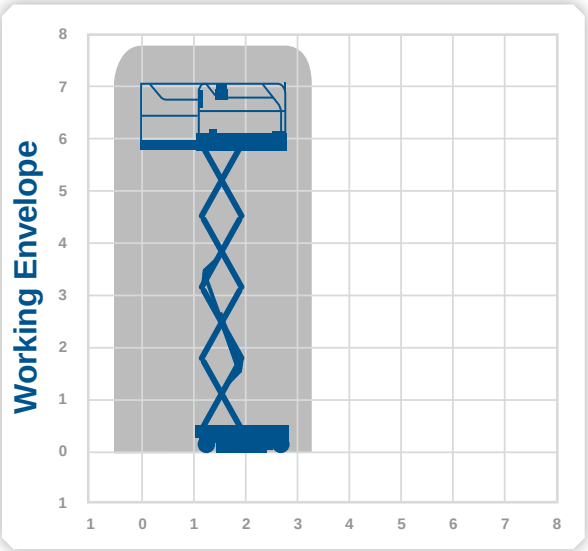

contact@rapidaccess-gulf.com
rapidaccess-gulf.com

GS1932

scissors

Working Height 7.8m

Closed Length	1.82m
Closed Height	2.11m
Stowed Height (guardrails lowered)	1.76m
Closed Width	0.81m
Platform Size	1.64m x 0.74m
Platform Length (deck extended)	2.54m
Max SWL	227kg
Weight	1503kg


Alternative machines

3219
GS19
GS20

Manufacturer

Genie



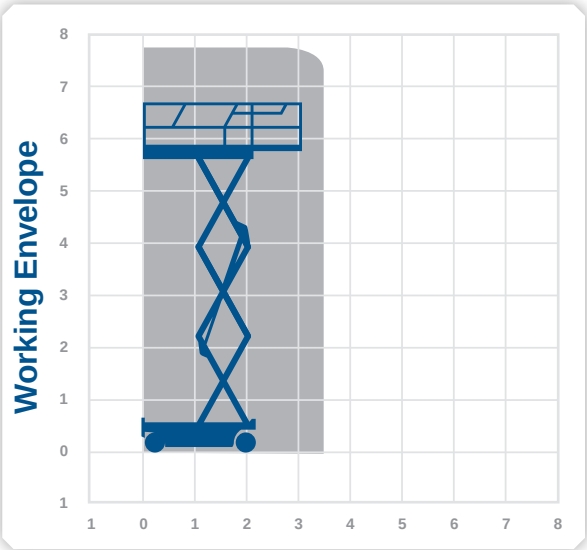

7.8m

Rapid Access


GS2032

scissors

Working Height	7.92m
Closed Length	2.45m
Closed Height	2.1m
Stowed Height (guardrails lowered)	1.75m
Closed Width	0.81m
Platform Size	2.21m x 0.7m
Platform Length (deck extended)	3.2m
Max SWL	363kg
Weight	1559kg

Manufacturer
Genie



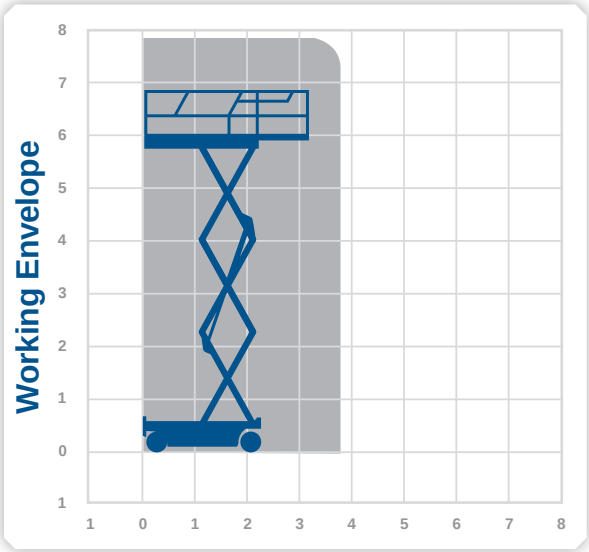

8.1m

contact@rapidaccess-gulf.com
rapidaccess-gulf.com



Rapid Access

3220 scissors

Working Height 8.1m

Closed Length	2.32m
Closed Height	2.08m
Stowed Height (guardrails lowered)	1.73m
Closed Width	0.81m
Platform Size	2.13m x 0.71m
Platform Length (deck extended)	3.04m
Max SWL	408kg
Weight	1594kg


Alternative machines

GS20

Manufacturer

Skyjack



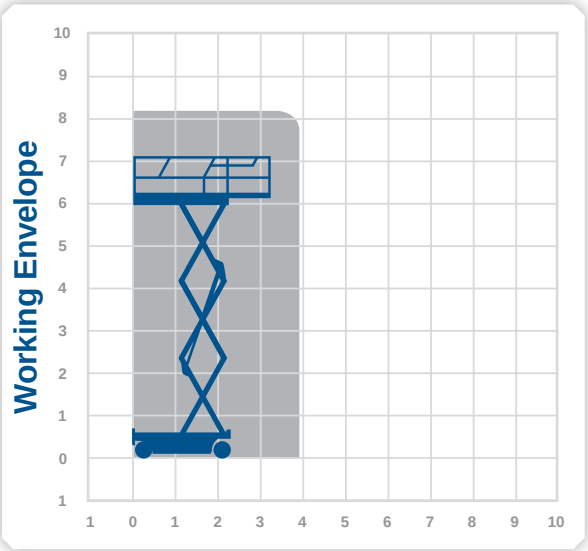

contact@rapidaccess-gulf.com
rapidaccess-gulf.com

EX2032 scissors


Working Height 8.1m

Closed Length	2.44m
Closed Height	1.75m
Stowed Height (guardrails lowered)	1.03m
Closed Width	0.81m
Platform Size	2.26m x 0.81m
Platform Length (deck extended)	0.91m
Max SWL	363kg
Weight	1621kg

Manufacturer
Genie

Explosion resistant

Batt · 2 · MHA · IPAF 3a

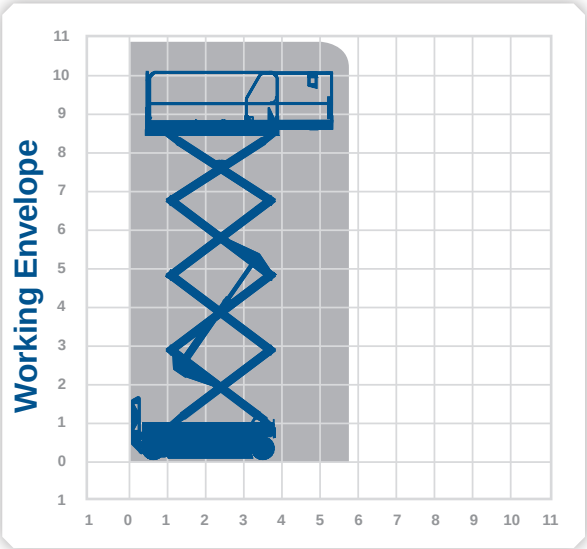

8.1m

Rapid Access


Compact 8 scissors

Working Height 8.2m

Closed Length	2.49m
Closed Height	2m
Stowed Height (guardrails lowered)	1.13m
Closed Width	0.81m
Platform Size	0.81m x 2.31m
Platform Length (deck extended)	3.23m
Max SWL	350kg
Weight	1655kg

Manufacturer
Haulotte



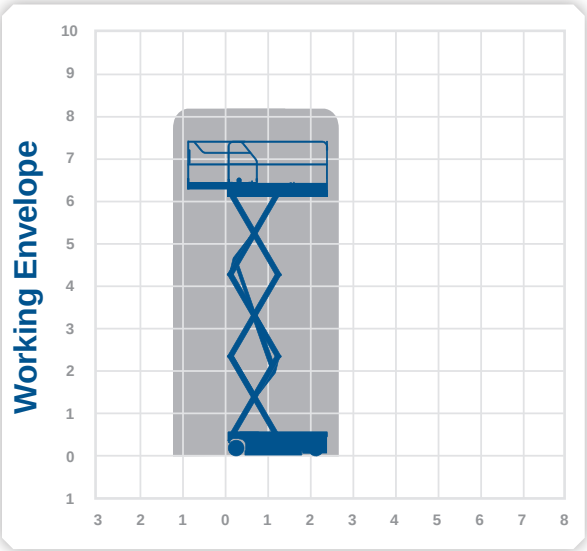

8.2m

contact@rapidaccess-gulf.com
rapidaccess-gulf.com

GS2646

scissors

Working Height 9.92m

Closed Length	2.45m
Closed Height	2.17m
Stowed Height (guardrails lowered)	1.99m
Closed Width	1.17m
Platform Size	2.21m x 0.94m
Platform Length (deck extended)	3.2m
Max SWL	454kg
Weight	2107kg


Alternative machines

4626
GS20
2646ES

Manufacturer

Genie



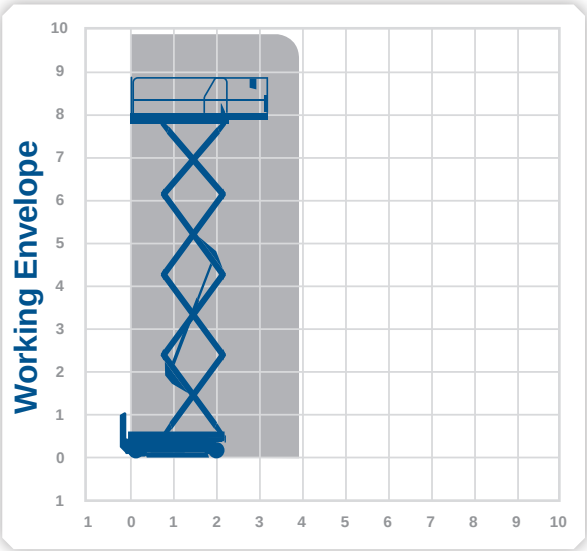

9.92m

Rapid Access

4626 scissors

Working Height 9.9m

Closed Length	2.31m
Closed Height	2.15m
Stowed Height (guardrails lowered)	1.79m
Closed Width	1.17m
Platform Size	2.11m x 1.07m
Platform Length (deck extended)	3.01m
Max SWL	454kg
Weight	2130kg


Alternative machines

GS2646E

Manufacturer

Skyjack



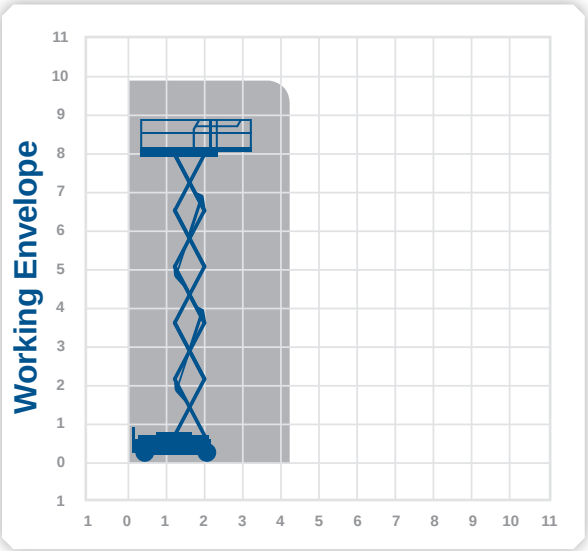

9.9m

contact@rapidaccess-gulf.com
rapidaccess-gulf.com

EX2646

scissors

Working Height 9.92m

Closed Length	2.67m
Closed Height	2.40m
Stowed Height (guardrails lowered)	2.40m
Closed Width	1.42m
Platform Size	2.34m x 1.42m
Platform Length (deck extended)	1.52m
Max SWL	408kg
Weight	2370kg

Alternative machines

EX2030

Manufacturer


Genie

Explosion resistant

Batt

3

IPAF 3a

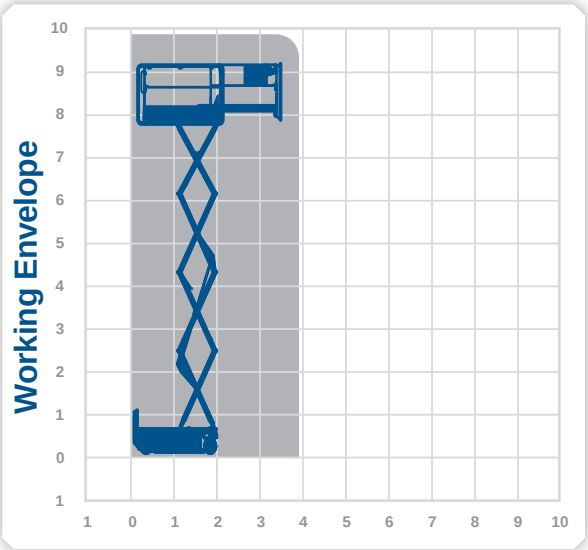

Rapid Access

3226 scissors

Working Height 9.92m

Closed Length	2.32m
Closed Height	2.15m
Stowed Height (guardrails lowered)	1.91m
Closed Width	0.81m
Platform Size	2.13m x 0.71m
Platform Length (deck extended)	3.23m
Max SWL	227kg
Weight	1890kg

Alternative machines


GS2632

Manufacturer

Skyjack

Indoor use only



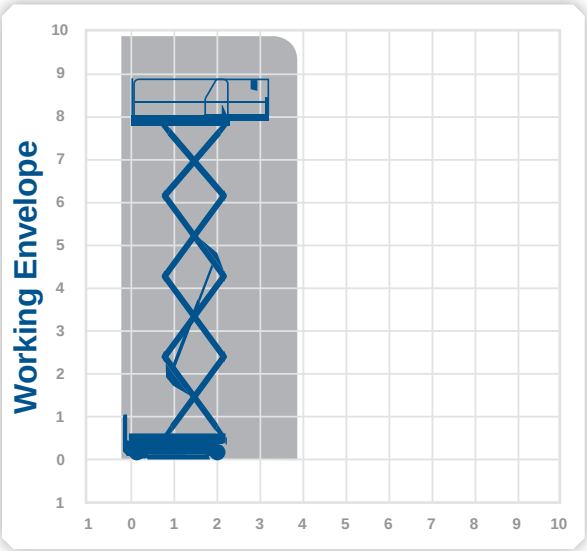

9.92m

contact@rapidaccess-gulf.com
rapidaccess-gulf.com

GS2632

scissors

Working Height 9.92m

Closed Length	2.44m
Closed Height	2.26m
Stowed Height (guardrails lowered)	1.91m
Closed Width	0.81m
Platform Size	2.26m x 0.79m
Platform Length (deck extended)	3.18m
Max SWL	227kg
Weight	1956kg

Alternative machines


3226

Manufacturer

Genie

Indoor use only



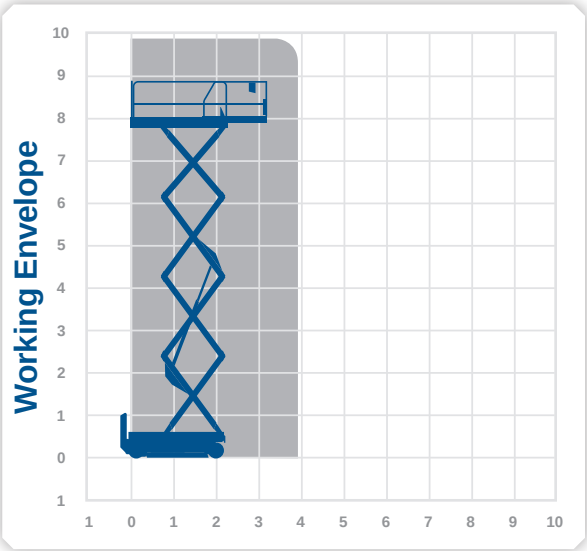

9.92m


Rapid Access

Compact 10N scissors

Working Height	10m
Closed Length	2.49m
Closed Height	2.18m
Stowed Height (guardrails lowered)	1.32m
Closed Width	0.81m
Platform Size	0.81m x 2.31m
Platform Length (deck extended)	3.23m
Max SWL	230kg
Weight	2190kg

Manufacturer
Haulotte



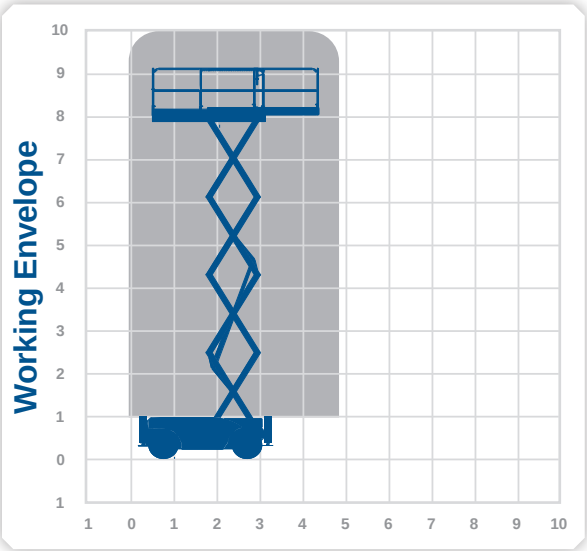

10.0m

contact@rapidaccess-gulf.com
rapidaccess-gulf.com


Compact 10 scissors

Working Height 10.28m

Closed Length	3.17m
Closed Height	2.44m
Stowed Height (guardrails lowered)	1.59m
Closed Width	1.78m
Platform Size	2.45m x 1.45m
Platform Length (deck extended)	3.7m
Max SWL	565kg
Weight	3520kg

Manufacturer
Haulotte



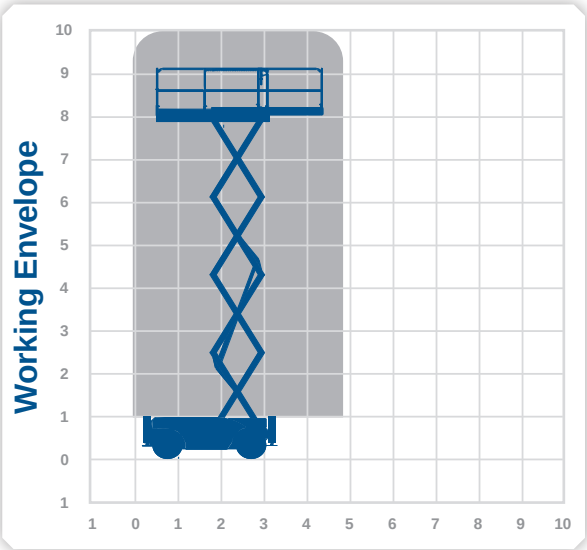

Rapid Access



contact@rapidaccess-gulf.com
rapidaccess-gulf.com

3246 scissors

Working Height 11.75m

Closed Length	2.43m
Closed Height	2.3m
Stowed Height (guardrails lowered)	1.8m
Closed Width	1.17m
Platform Size	2.26m x 1.16m
Platform Length (deck extended)	3.25m
Max SWL	318kg
Weight	2796kg


Alternative machines

4632
3246ES

Manufacturer

Genie



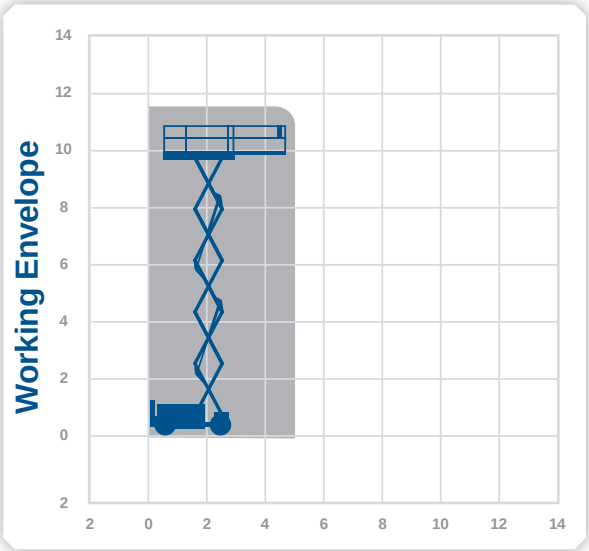

Rapid Access

GS3369RT

scissors


Working Height 11.75m

Closed Length	3.12m
Closed Height	2.59m
Stowed Height (guardrails lowered)	1.92m
Closed Width	1.75m
Platform Size	2.79m x 1.6m
Platform Length (deck extended)	1.52m
Max SWL	454kg
Weight	3557kg

Manufacturer

Genie



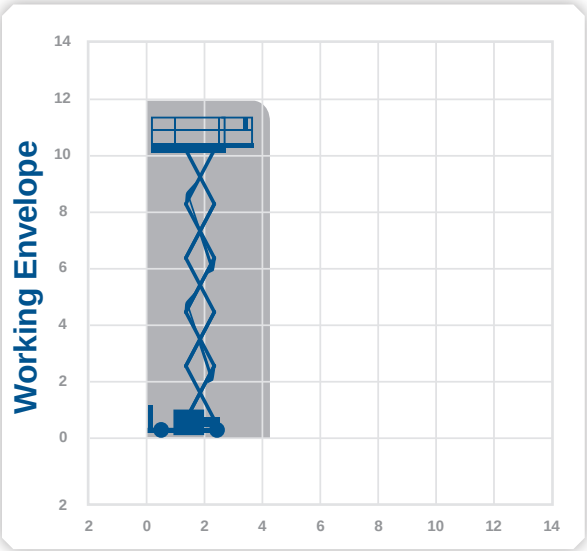

contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Working Height 11.8m

Closed Length	2.31m
Closed Height	2.24m
Stowed Height (guardrails lowered)	1.88m
Closed Width	1.17m
Platform Size	2.11m x 1.07m
Platform Length (deck extended)	3.01m
Max SWL	317kg
Weight	2300kg


Alternative machines

GS32

Manufacturer

Skyjack



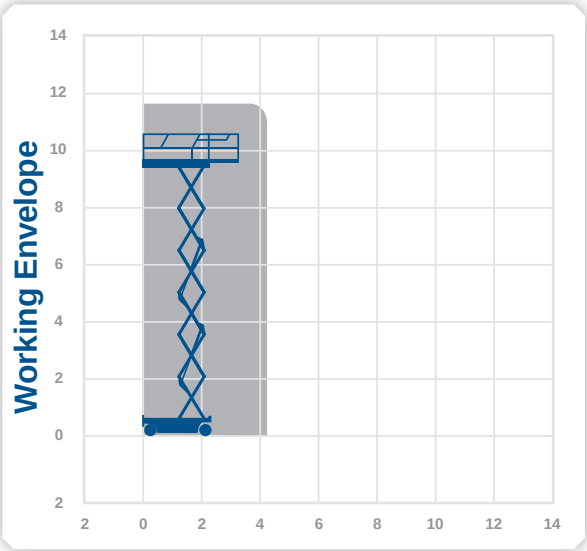

Rapid Access


GS32D scissors

Working Height 11.75m

Closed Length	2.67m
Closed Height	2.45m
Stowed Height (guardrails lowered)	1.83m
Closed Width	1.73m
Platform Size	2.51m x 1.55m
Platform Length (deck extended)	3.96m
Max SWL	454kg
Weight	4115kg

Manufacturer
Genie



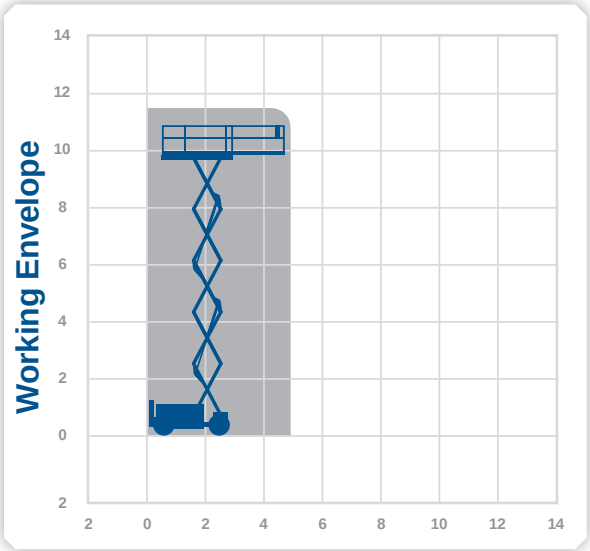

contact@rapidaccess-gulf.com
rapidaccess-gulf.com

GS3369BE

scissors


Working Height 11.96m

Closed Length	3.12m
Closed Height	2.59m
Stowed Height (guardrails lowered)	1.92m
Closed Width	1.75m
Platform Size	2.79m x 1.6m
Platform Length (deck extended)	4.5m
Max SWL	454kg
Weight	3949kg

Manufacturer

Genie



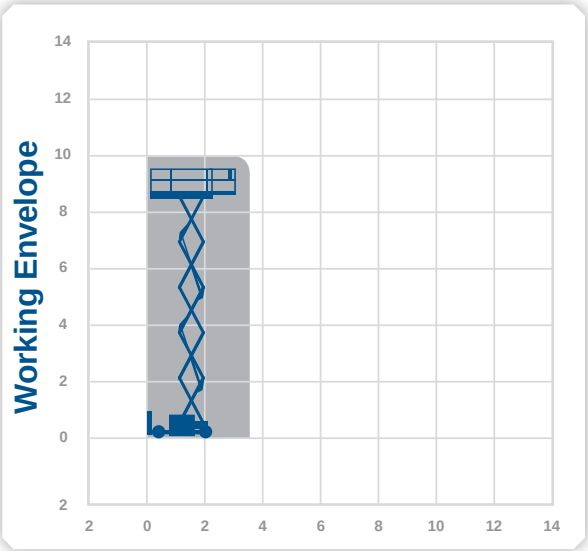

11.96m

Rapid Access



contact@rapidaccess-gulf.com
rapidaccess-gulf.com


Compact 12 scissors

Working Height 11.98m

Closed Length	2.49m
Closed Height	1.53m
Stowed Height (guardrails lowered)	2.39m
Closed Width	1.2m
Platform Size	1.2m x 2.31m
Platform Length (deck extended)	3.23m
Max SWL	300kg
Weight	2470kg

Manufacturer
Genie



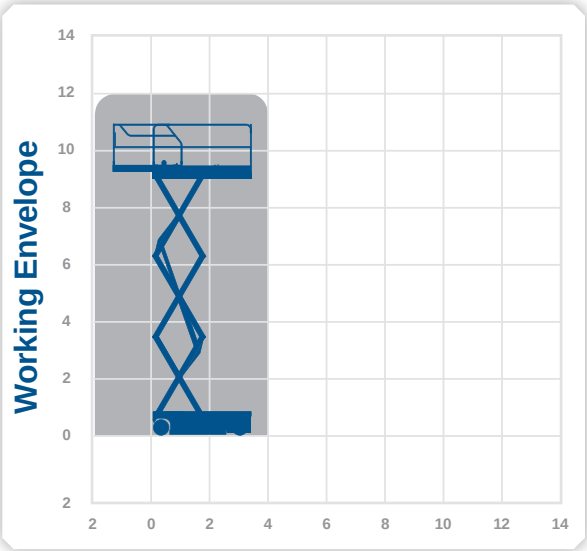

Rapid Access


Compact 12SX scissors

Working Height 12.0m

Closed Length	4.18m
Closed Height	1.71m
Stowed Height (guardrails lowered)	2.57m
Closed Width	2.25m
Platform Size	3.91m x 1.81m
Platform Length (deck extended)	4.91m
Max SWL	700kg
Weight	5510kg

Manufacturer
Haulotte



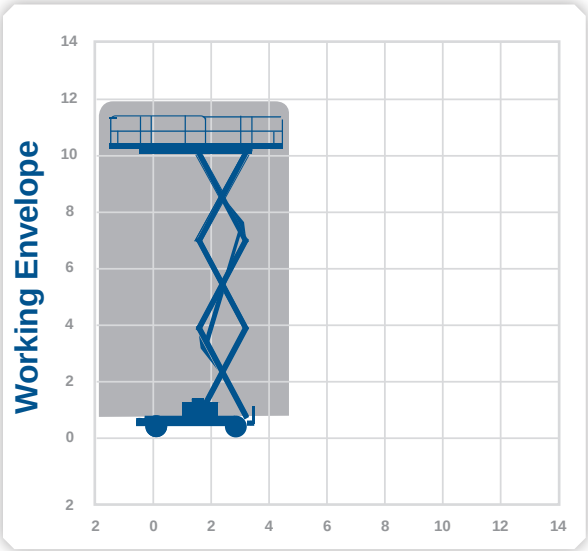



One day of powered access training, years of working safely at height. Contact us and get trained with Rapid Access
contact@rapidaccess-gulf.com


Compact 12DX scissors

Working Height 12.06m

Closed Length	3.17m
Closed Height	2.56m
Stowed Height (guardrails lowered)	1.7m
Closed Width	1.78m
Platform Size	2.45m x 1.45m
Platform Length (deck extended)	3.7m
Max SWL	450kg
Weight	4110kg

Manufacturer
Haulotte



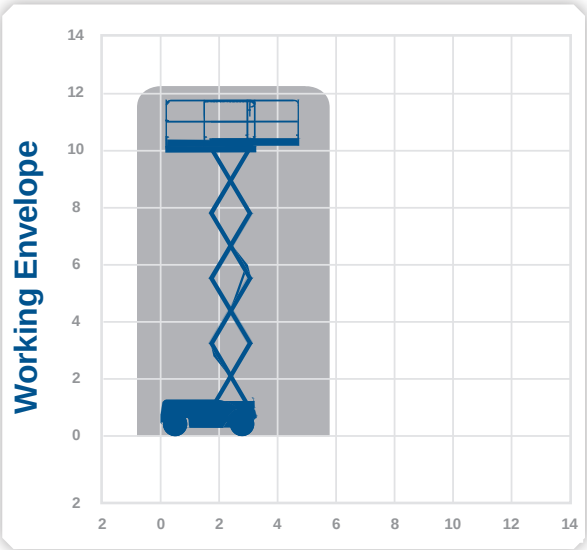

12.06m

Rapid Access


3394RT scissors

Working Height 12.06m

Closed Length	3.86m
Closed Height	1.57m
Stowed Height (guardrails lowered)	1.97m
Closed Width	2.39m
Platform Size	2.18m x 3.81m
Platform Length (deck extended)	3.86m
Max SWL	1020kg
Weight	5402kg

Manufacturer
JLG



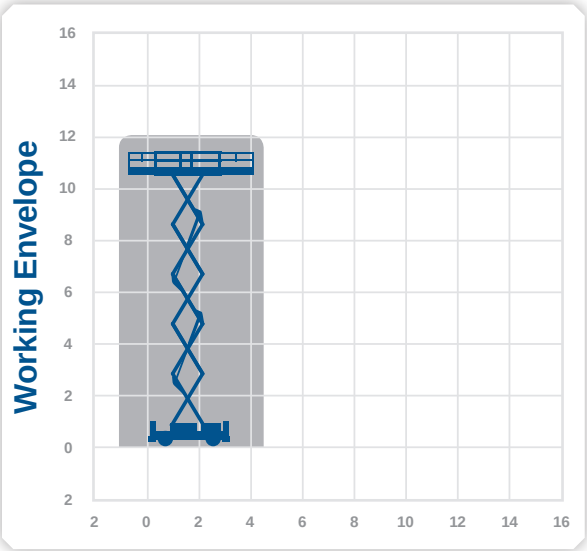

12.06m

contact@rapidaccess-gulf.com
rapidaccess-gulf.com

4394RT scissors

Working Height 13.11m

Closed Length	3.86m
Closed Height	1.79m
Stowed Height (guardrails lowered)	1.10m
Closed Width	2.39m
Platform Size	3.81m x 2.18m
Platform Length (deck extended)	4.03m
Max SWL	680kg
Weight	7150kg


Alternative machines

GS4390

Manufacturer

JLG



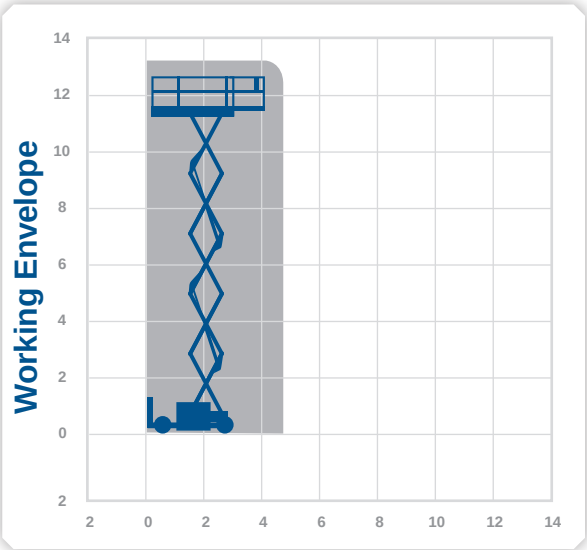

13.11m


Rapid Access

COMPACT 14 scissors

Working Height	13.85m
Closed Length	2.49m
Closed Height	2.08m
Stowed Height (guardrails lowered)	2.5m
Closed Width	1.2m
Platform Size	2.31m x 1.2m
Platform Length (deck extended)	3.23m
Max SWL	350kg
Weight	3175kg

Manufacturer
Haulotte



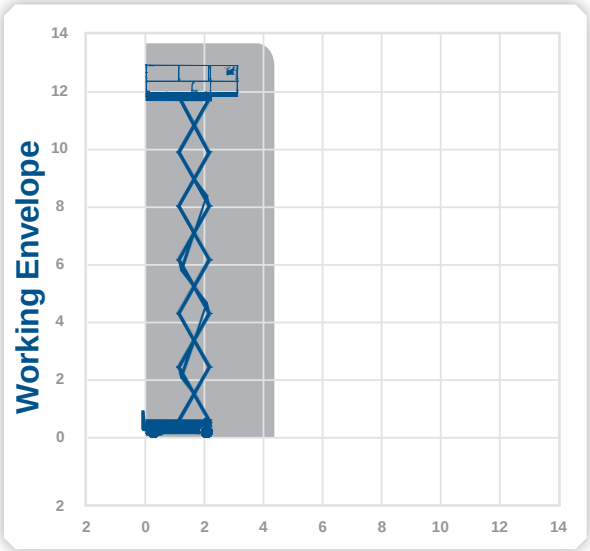

contact@rapidaccess-gulf.com
rapidaccess-gulf.com

GS4047

scissors


Working Height 13.89m

Closed Length	2.44m
Closed Height	2.54m
Stowed Height (guardrails lowered)	1.88m
Closed Width	1.19m
Platform Size	2.26m x 1.15m
Platform Length (deck extended)	3.36m
Max SWL	350kg
Weight	3221kg

Manufacturer
Genie

Indoor use only



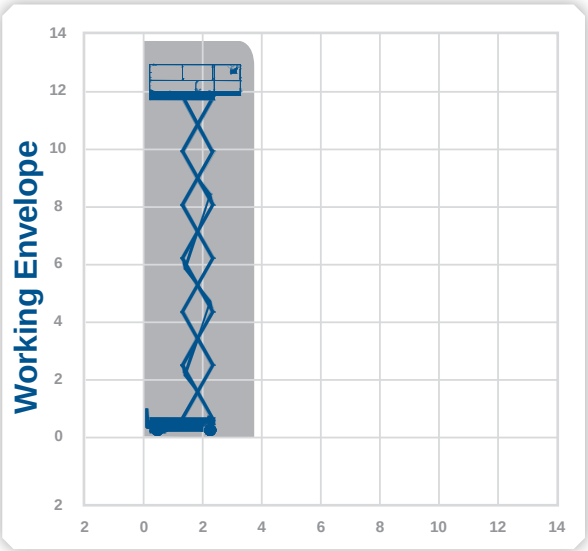

13.89m

Rapid Access


4069-O scissors

Working Height 14.2m

Closed Length	3.1m
Closed Height	2.83m
Stowed Height (guardrails lowered)	2.01m
Closed Width	1.75m
Platform Size	2.92m x 1.65m
Platform Length (deck extended)	3.83m
Max SWL	360kg
Weight	5300kg

Manufacturer
JLG



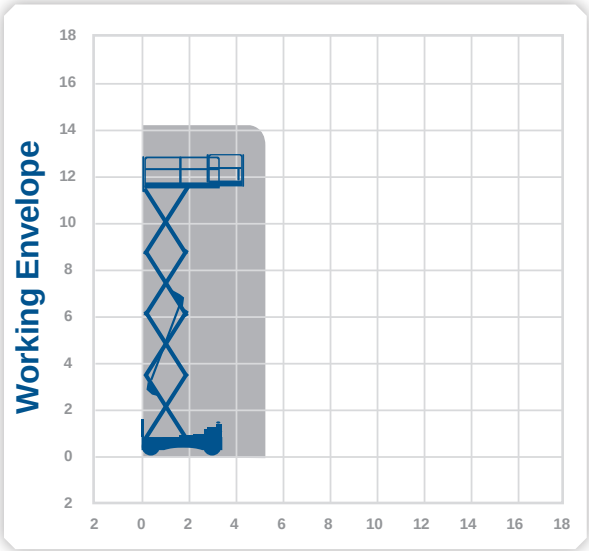

contact@rapidaccess-gulf.com
rapidaccess-gulf.com


Compact 15SX scissors

Working Height 15.0m

Closed Length	4.18m
Closed Height	2.11m
Stowed Height (guardrails lowered)	2.77m
Closed Width	2.25m
Platform Size	3.91m x 1.81m
Platform Length (deck extended)	4.91m
Max SWL	500kg
Weight	6340kg

Manufacturer
Haulotte



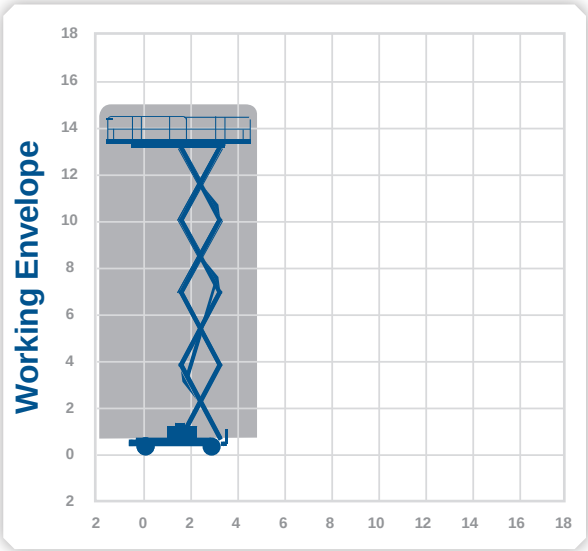

15.0m

Rapid Access

GS43 scissors

Working Height 15.1m

Closed Length	4.88m
Closed Height	2.93m
Stowed Height (guardrails lowered)	2.25m
Closed Width	2.29m
Platform Size	4.81m x 1.83m
Platform Length (deck extended)	7.38m
Max SWL	680kg
Weight	7323kg


Alternative machines

GS53

Manufacturer

Genie



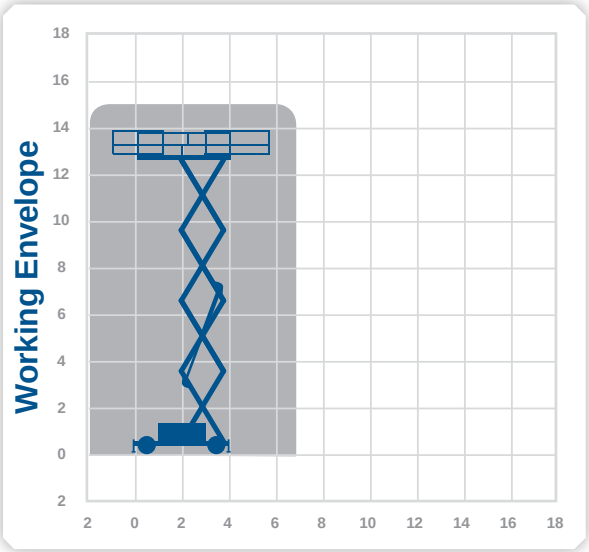

15.1m

contact@rapidaccess-gulf.com
rapidaccess-gulf.com


Compact 18SX scissors

Working Height 18.0m

Closed Length	4.18m
Closed Height	2.11m
Stowed Height (guardrails lowered)	2.96m
Closed Width	2.25m
Platform Size	3.91m x 1.81m
Platform Length (deck extended)	4.91m
Max SWL	500kg
Weight	7300kg

Manufacturer
Haulotte



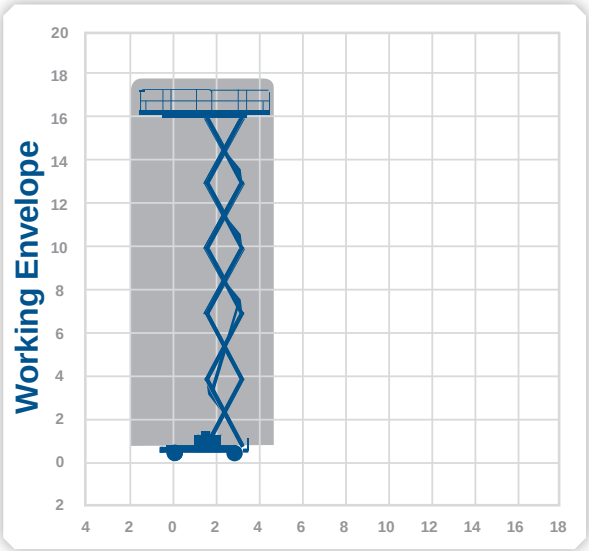

Rapid Access

GS53 scissors

Working Height 18.15m

Closed Length	4.88m
Closed Height	3.15m
Stowed Height (guardrails lowered)	2.47m
Closed Width	2.29m
Platform Size	4.81m x 1.83m
Platform Length (deck extended)	7.38m
Max SWL	680kg
Weight	8050kg

Alternative machines


GS4390

Manufacturer

Genie



18.15m

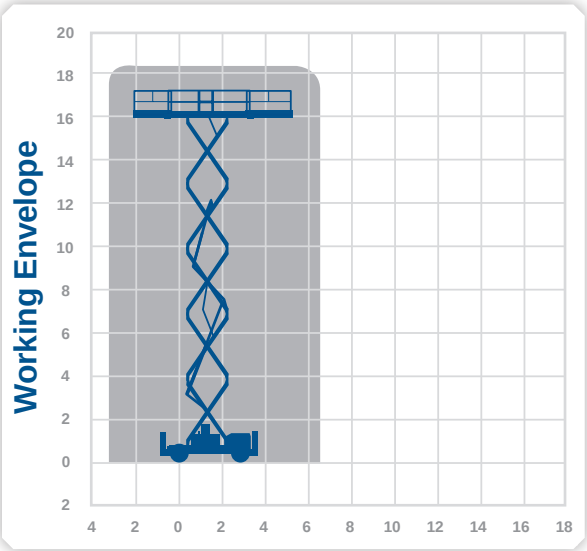

contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Boom Lifts



Contact our hire team for expert advice and assistance

contact@rapidaccess-gulf.com

rapidaccess-gulf.com

Boom Lifts

- Working heights from 10m to 56m
- Variety of power options
- Narrow aisle machines
- Telescopic or articulating action
- Rough terrain tyre option
- Non-marking tyres for use on finished floors


For more information please call your local depot (refer to page 5) or visit **rapidaccess-gulf.com**



Working Height	**10.89m**
Horizontal Outreach	**6.25m**
Closed Length	5.31m
Closed Height	2.0m
Closed Width	1.2m
Platform Size	1.17m x 0.76m
Rotation	355°
Max SWL	227kg
Weight	6450kg

Manufacturer
Genie



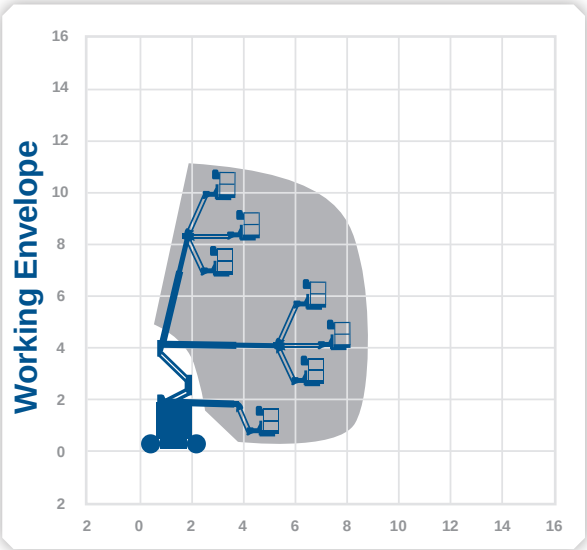

Rapid Access

Working Height	**10.89m**
Horizontal Outreach	**6.4m**
Closed Length	5.2m
Closed Height	2.0m
Closed Width	1.2m
Platform Size	1.17m x 0.76m
Rotation	355°
Max SWL	227kg
Weight	6577kg


Alternative machines

HR12NB
Z30NRJ

Manufacturer

Genie



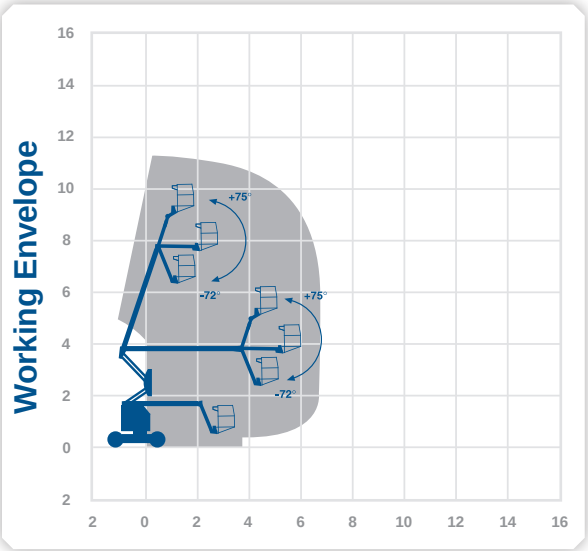


contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Working Height	**11.68m**
Horizontal Outreach	**7.22m**
Closed Length	5.64m
Closed Height	1.99m
Closed Width	1.2m
Platform Size	1.14m x 0.8m
Rotation	355˚
Max SWL	230kg
Weight	5620kg
Reach Below Ground	n/a

Manufacturer
Haulotte



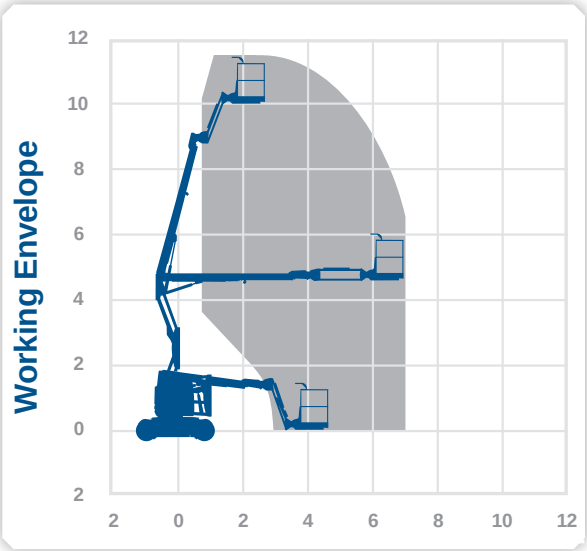

11.68m
6.94m

Rapid Access

Working Height	**12.2m**
Horizontal Outreach	**6.1m**
Closed Length	4.1m
Closed Height	1.9m
Closed Width	1.5m
Platform Size	1.10m x 0.65m
Rotation	360º
Max SWL	200kg
Weight	3060kg

Alternative machines


G30N
HR15NB

Manufacturer

Niftylift

fitted with manufacturers secondary guarding as standard



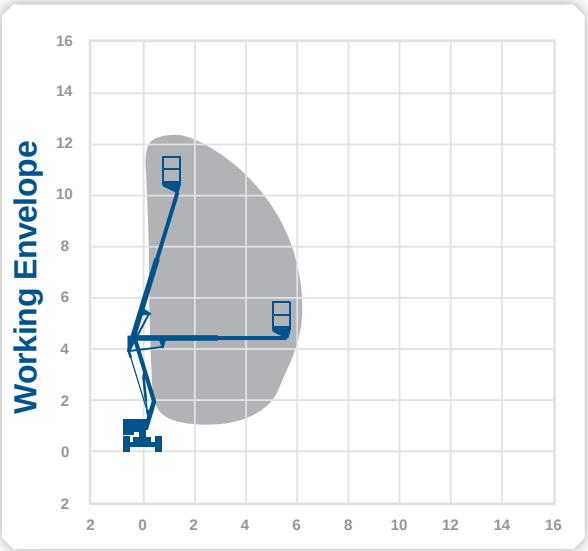


contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Working Height	**12.4m**
Horizontal Outreach	**6.6m**
Closed Length	5.5m
Closed Height	2.2m
Closed Width	1.9m
Platform Size	1.5m x 0.8m
Rotation	350˚
Max SWL	230kg
Weight	5620kg
Reach Below Ground	n/a

Manufacturer

Haulotte



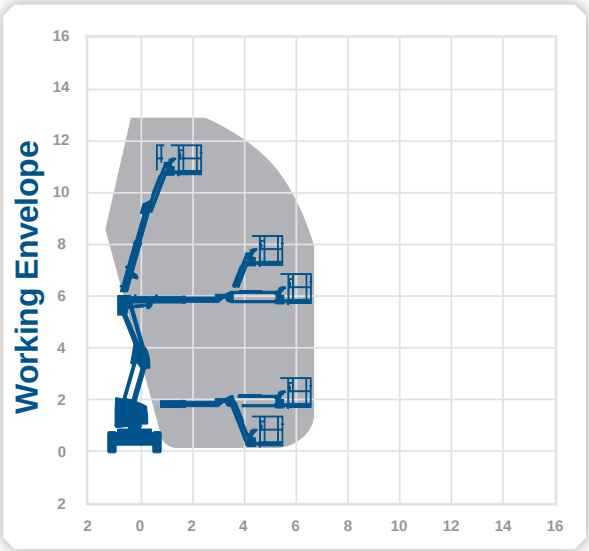

12.4m

6.6m

Rapid Access

Z34-22BE

Working Height	**12.62m**
Horizontal Outreach	**6.78m**
Closed Length	5.64m
Closed Height	2.0m
Closed Width	1.73m
Platform Size	1.42m x 0.76m
Rotation	355°
Max SWL	227g
Weight	5443kg


Alternative machines

HR12NB
HR15NB

Manufacturer

Genie



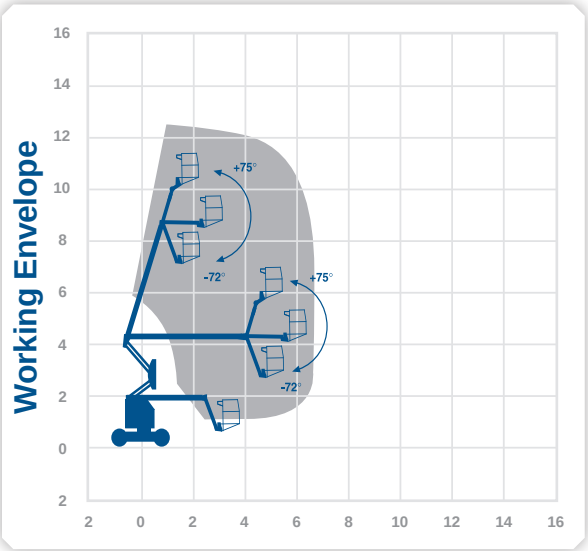

contact@rapidaccess-gulf.com
rapidaccess-gulf.com

HR15NB

booms

Working Height 15.4m
Horizontal Outreach 9.6m

Closed Length	5.0m
Closed Height	2.1m
Closed Width	1.5m
Platform Size	1.5m x 0.7m
Rotation	360°
Max SWL	225kg
Weight	6680kg

Alternative machines


Z34/22BE
HR12NB

Manufacturer

Niftylift

fitted with manufacturers secondary guarding as standard

Dual | A | 2 | IPAF 3b

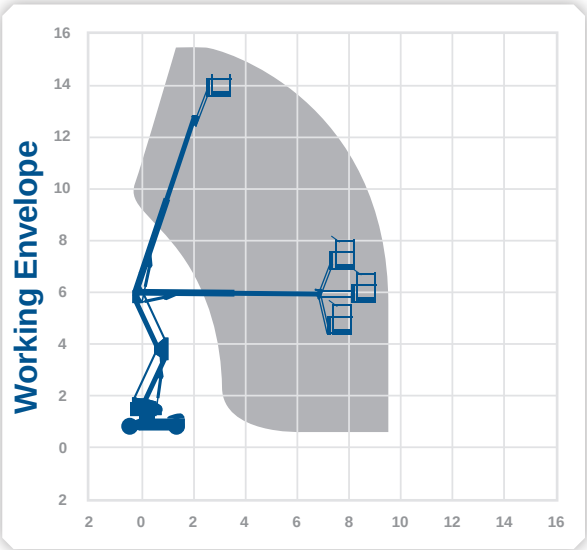

Working with materials at height? Browse through our video gallery to know more about our award winning safety innovations. www.rapidaccess-gulf.com



45JSX booms

Working Height	**15.72m**
Horizontal Outreach	**7.24m**
Closed Length	6.5m
Closed Height	2.01m
Closed Width	1.75m
Platform Size	1.52m x 0.76m
Rotation	360º
Max SWL	230kg
Weight	6700kg


Alternative machines

45JX
Z45DX
Z45DJX
Z45B

Manufacturer

JLG



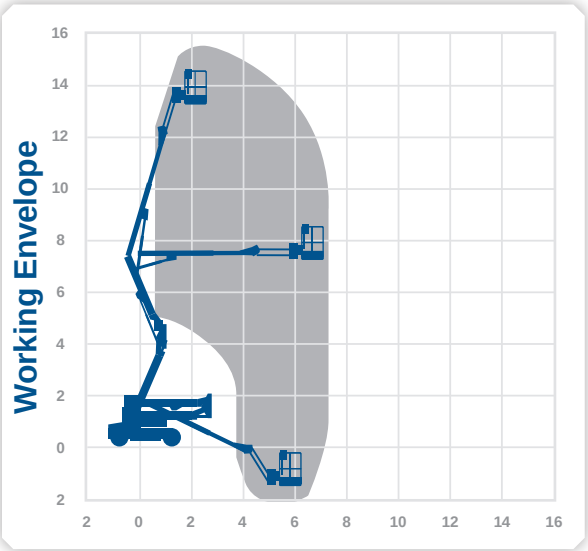

contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Working Height	**15.72m**
Horizontal Outreach	**7.24m**
Closed Length	6.5m
Closed Height	2.01m
Closed Width	1.75m
Platform Size	1.52m x 0.76m
Rotation	360°
Max SWL	230kg
Weight	6532kg


Alternative machines

HR15NB

Manufacturer

JLG



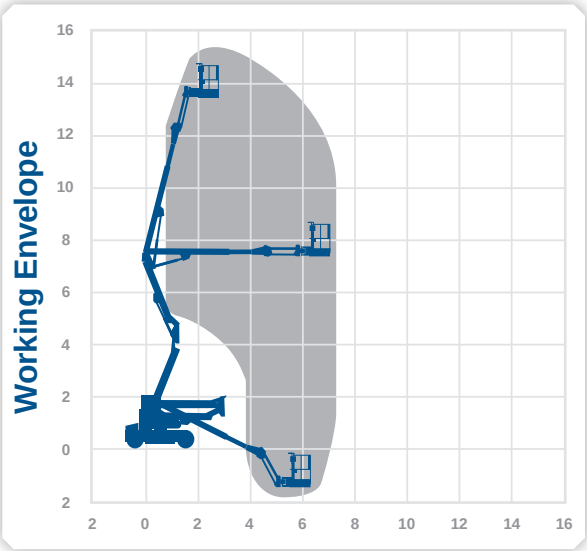

Rapid Access




contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Working Height	**15.72m**
Horizontal Outreach	**11.18m**
Closed Length	8.48m
Closed Height	2.49m
Closed Width	2.3m
Platform Size	1.83m x 0.76m
Rotation	Continuous
Max SWL	227kg
Weight	6709kg
Reach Below Ground	1.5m

Alternative machines
Z45DX
Z45DJX

Manufacturer
Genie



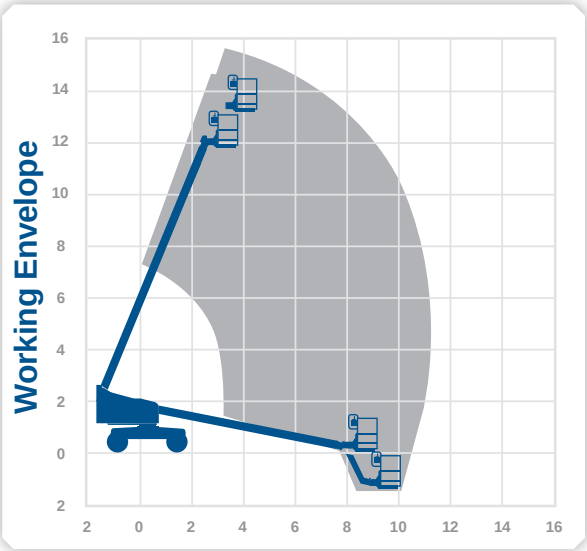

Rapid Access

Z45DJXC

Working Height	**15.86m**
Horizontal Outreach	**7.55m**
Closed Length	6.66m
Closed Height	2.25m
Closed Width	2.29m
Platform Size	0.76m x 1.83m
Rotation	355º
Max SWL	454kg
Weight	6984kg


Alternative machines

Z45DX
450AJ

Manufacturer

Genie



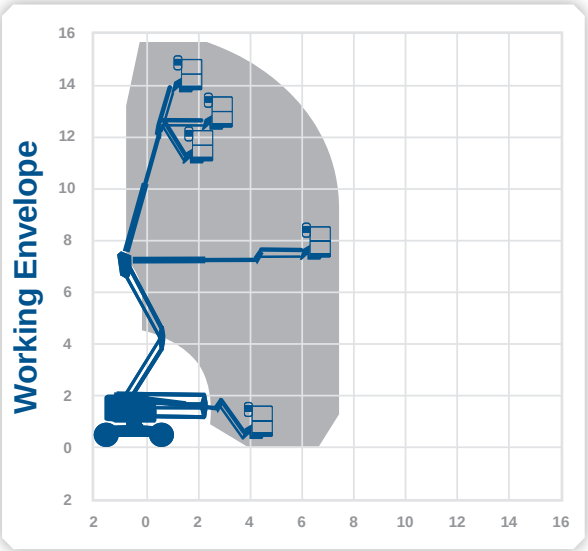

contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Working Height	**15.9m**
Horizontal Outreach	**7.62m**
Closed Length	5.56m
Closed Height	2.11m
Closed Width	2.29m
Platform Size	1.83m x 0.76m
Rotation	355°
Max SWL	227kg
Weight	6280kg (Air) 6830kg (Foam Filled)


Alternative machines

G45DX
Z45DJX
450AJ

Manufacturer

Genie



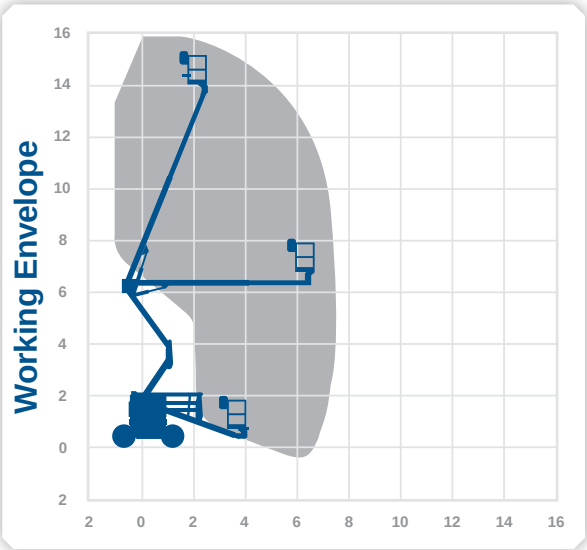

Rapid Access

Working Height	**15.94m**
Horizontal Outreach	**7.65m**
Closed Length	6.83m
Closed Height	2.0m
Closed Width	1.79m
Platform Size	1.83m x 0.76m
Rotation	355°
Max SWL	227kg
Weight	7620kg


Alternative machines

Z45EJ
Z45DJX
450AJ

Manufacturer

Genie



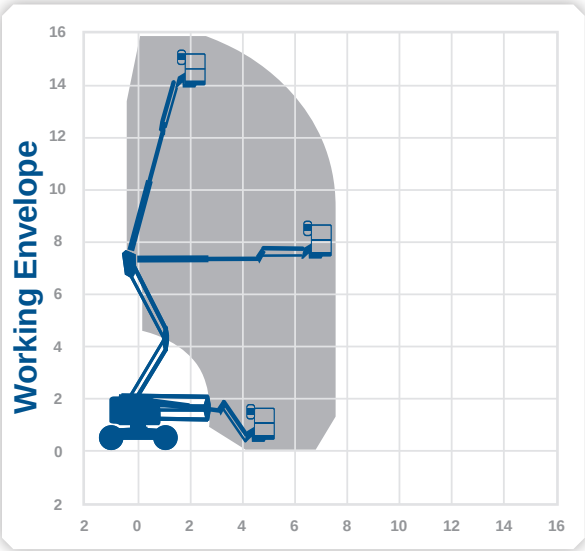

contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Z45EJ

Working Height	**15.92m**
Horizontal Outreach	**7.65m**
Closed Length	6.7m
Closed Height	2.0m
Closed Width	1.79m
Platform Size	1.83m x 0.76m
Rotation	355°
Max SWL	227kg
Weight	7620kg


Alternative machines

Z45BJ
Z45DX
Z454DXJ
450AJ

Manufacturer

Genie



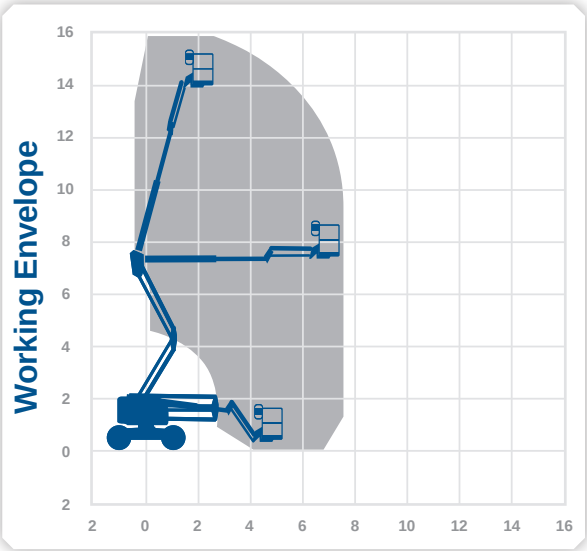

Rapid Access

Z45B

booms


Working Height	**15.94m**
Horizontal Outreach	**7.52m**
Closed Length	6.65m
Closed Height	2.13m
Closed Width	2.29m
Platform Size	1.83m x 0.76m
Rotation	355°
Max SWL	227kg
Weight	6123kg

Manufacturer

Genie

Dual | 2 | A | IPAF 3b

Working Envelope

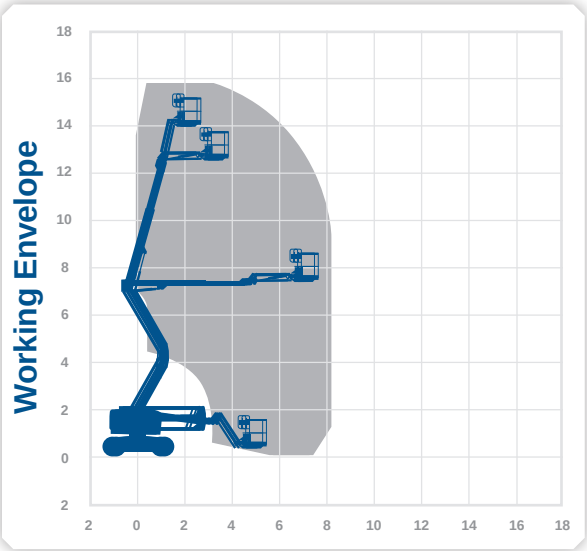

contact@rapidaccess-gulf.com
rapidaccess-gulf.com



Rapid Access

Z45DJX

Working Height	**16.0m**
Horizontal Outreach	**7.6m**
Closed Length	6.78m
Closed Height	2.08m
Closed Width	2.23m
Platform Size	1.82m x 0.76m
Rotation	359º
Max SWL	227kg
Weight	6542kg (Air) 6892kg (Foam Filled)


Alternative machines

Z45D
Z45D-R
Z4525DJX

Manufacturer

Genie



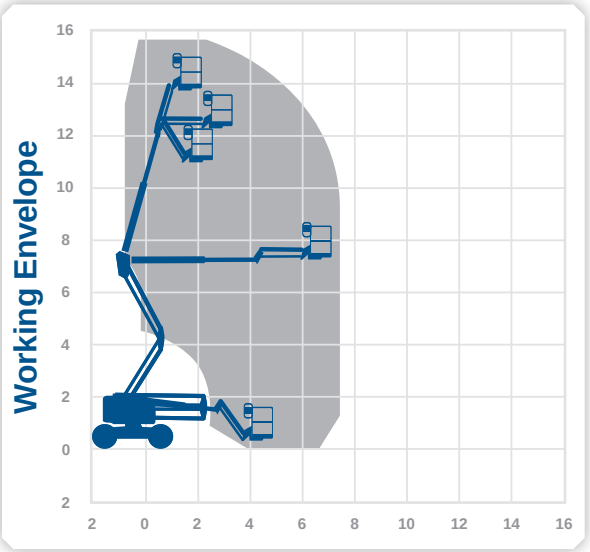


contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Working Height	**16.0m**
Horizontal Outreach	**8.3m**
Closed Length	6.75m
Closed Height	2.3m
Closed Width	2.3m
Platform Size	1.83m x 0.8m
Rotation	355°
Max SWL	230g
Weight	6600kg

Manufacturer

Haulotte



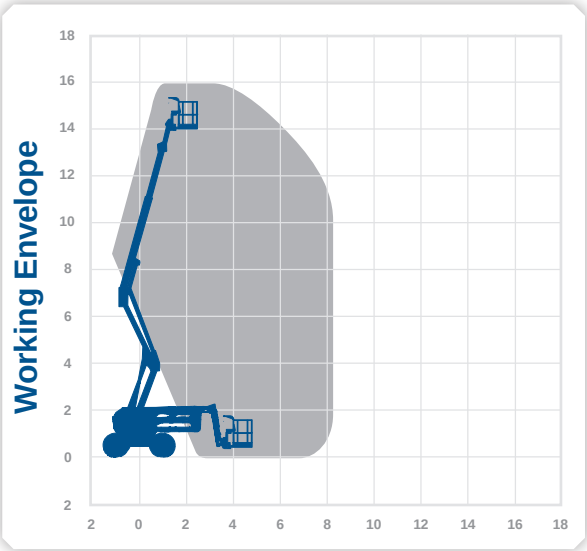

16.25m

9.1m


Rapid Access

Working Height	**17.62m**
Horizontal Outreach	**9.37m**
Closed Length	7.58m
Closed Height	2.13m
Closed Width	2.29m
Platform Size	1.83m x 0.76m
Rotation	355°
Max SWL	227kg
Weight	7394kg

Manufacturer

Genie

D | 2 | RT4 | A | IPAF 3b

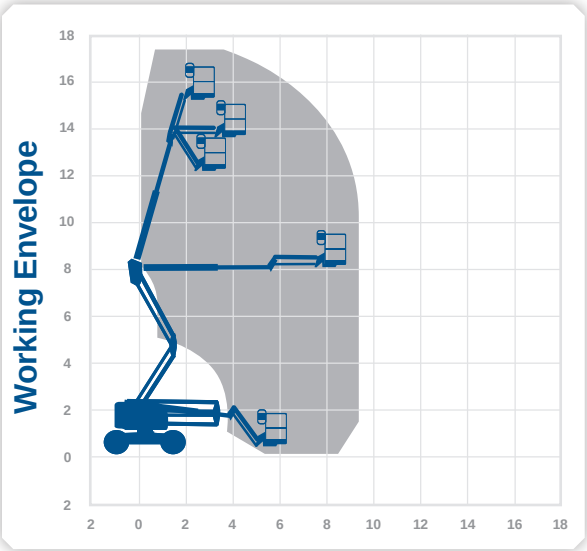


contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Z60-37FE

Working Height	**20.16m**
Horizontal Outreach	**11.15m**
Closed Length	6.3m
Closed Height	2.62m
Closed Width	2.49m
Platform Size	1.83m x 0.76m
Rotation	355°
Max SWL	227kg
Weight	7756kg

Manufacturer

Genie

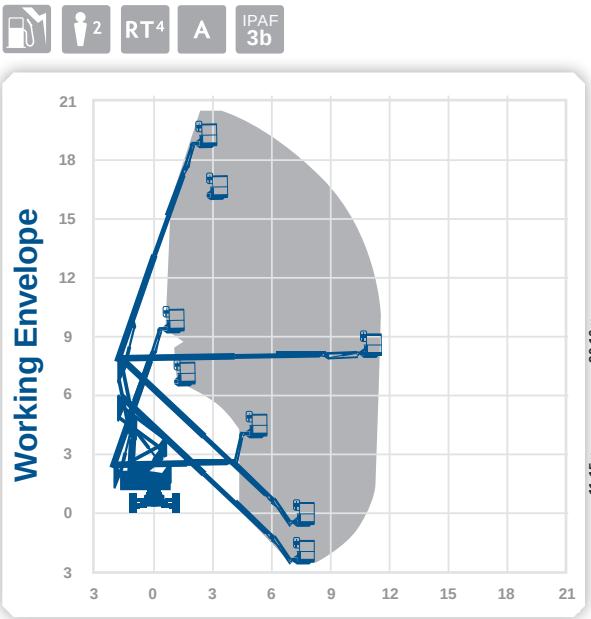


Rapid Access

Working Height	**20.26m**
Horizontal Outreach	**12.2m**
Closed Length	8.8m
Closed Height	2.51m
Closed Width	2.42m
Platform Size	1.83m x 0.8m
Rotation	360°
Max SWL	230kg
Weight	9600kg

Manufacturer

Haulotte



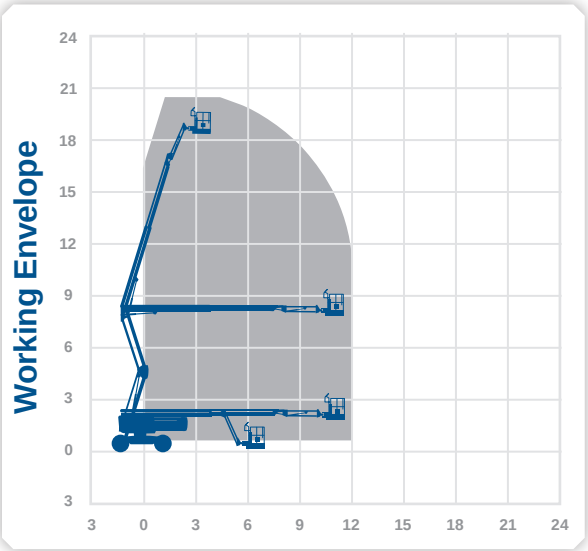

contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Working Height	**20.29m**
Horizontal Outreach	**12.12m**
Closed Length	8.82m
Closed Height	2.56m
Closed Width	2.44m
Platform Size	1.83m x 0.91m
Rotation	180º
Max SWL	227kg
Weight	10650kg


Alternative machines

60AJX
G60X
Z62

Manufacturer

JLG



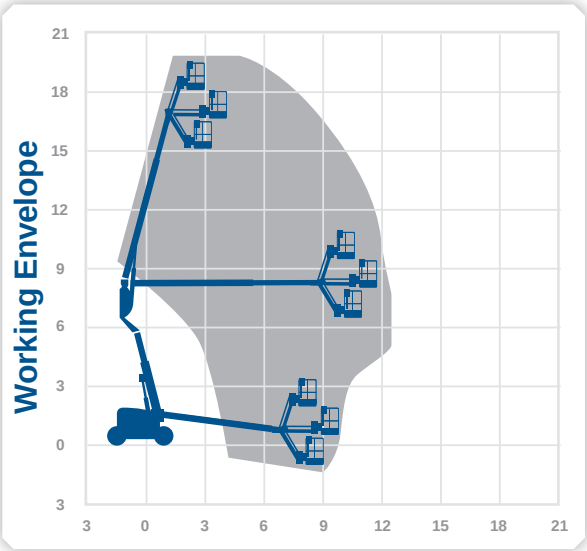


Rapid Access

S60X booms

Working Height	**20.3m**
Horizontal Outreach	**15.48m**
Closed Length	8.5m
Closed Height	2.72m
Closed Width	2.49m
Platform Size	1.83m x 0.76m 2.44m x 0.91m
Rotation	Continuous
Max SWL	227kg
Weight	9698kg

Manufacturer
Genie



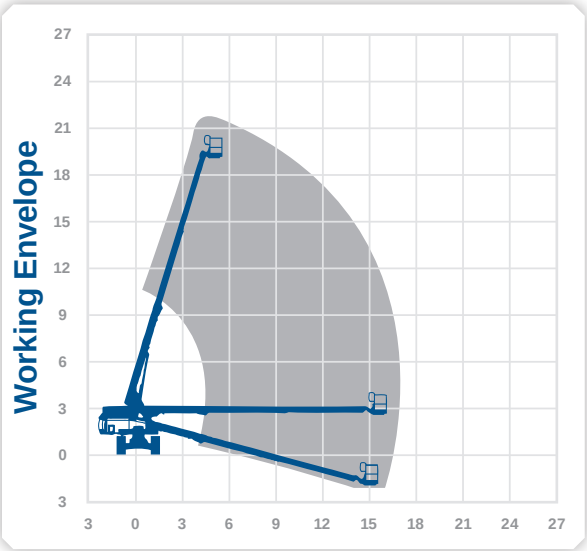


One day of powered access training, years of working safely at height. Call today and get trained with Rapid Access.

Working Height	**20.36m**
Horizontal Outreach	**13.19m**
Closed Length	9.37m
Closed Height	2.54m
Closed Width	2.42m
Platform Size	0.76m x 1.83m
Rotation	180˚
Max SWL	230kg
Weight	7300kg

Manufacturer

JLG



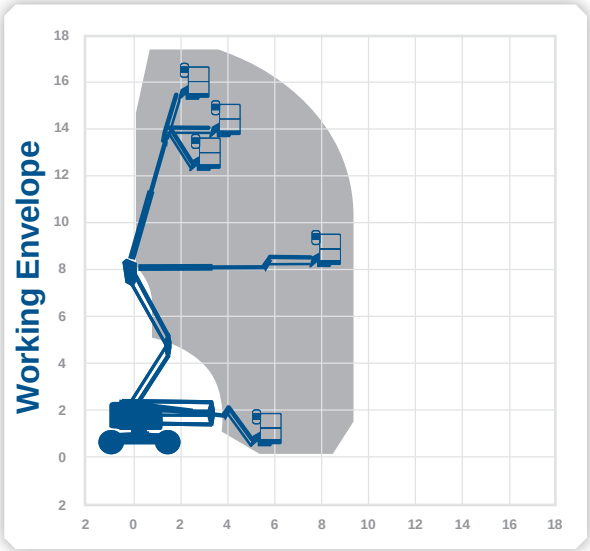

Rapid Access

G60X booms

Working Height	**20.39m**
Horizontal Outreach	**11.05m**
Closed Length	8.15m
Closed Height	2.69m
Closed Width	2.46m
Platform Size	1.83m x 0.76m
Rotation	Continuous
Max SWL	227kg
Weight	10,025kg (Air) 10,765kg (Foam Filled)


Alternative machines

600AJ

Manufacturer

Genie



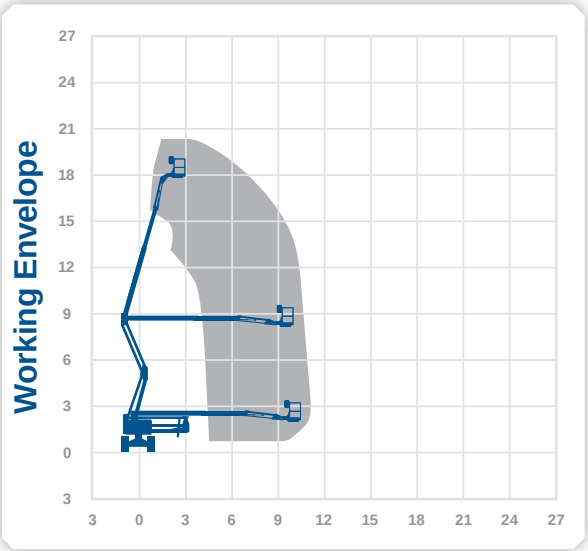


One day of powered access training, years of working safely at height. Call today and get trained with Rapid Access.

Working Height	**20.65m**
Horizontal Outreach	**18.65m**
Closed Length	8.93m
Closed Height	2.67m
Closed Width	2.83m
Platform Size	1.8m x 0.8m
Rotation	360°
Max SWL	230kg
Weight	11710kg

Manufacturer

Haulotte



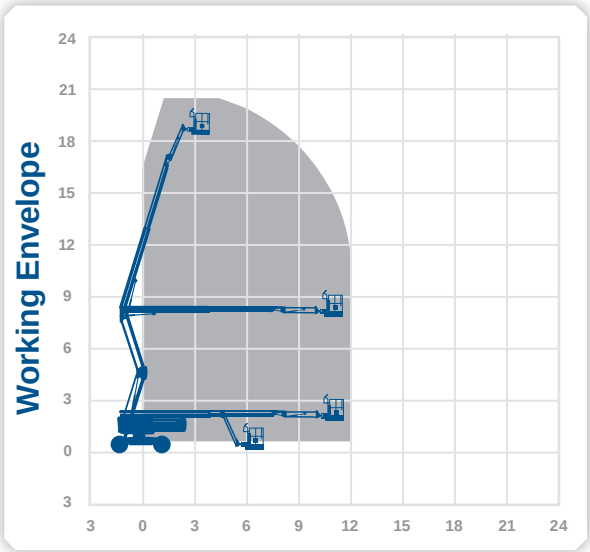

Rapid Access


Z62/40

booms

Working Height	**20.87m**
Horizontal Outreach	**12.47m**
Closed Length	9.25m
Closed Height	2.56m
Closed Width	2.49m
Platform Size	0.76m x 1.83m
Rotation	Continuous
Max SWL	227kg
Weight	10766kg
Operational Full Width	2.49m

Manufacturer
Genie



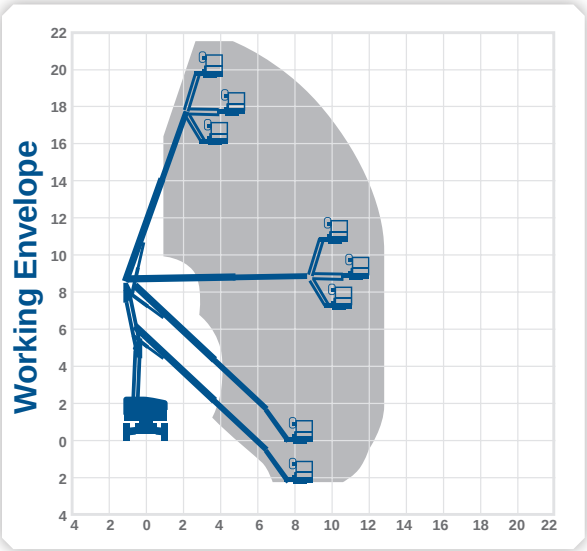

20.87m

12.47m

contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Working Height	**21.8m**
Horizontal Outreach	**17.1m**
Closed Length	9.5m
Closed Height	2.72m
Closed Width	2.5m
Platform Size	1.83m x 0.76m
Rotation	Continuous
Max SWL	227kg
Weight	10102kg
Reach Below Ground	2.71m


Alternative machines

G65X
66JX
S60X

Manufacturer

Genie



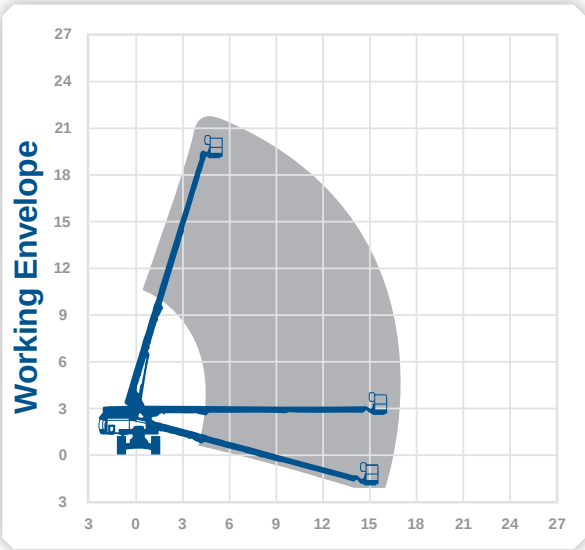

Rapid Access

66JX booms

Working Height	**22.12m**
Horizontal Outreach	**17.3m**
Closed Length	10.21m
Closed Height	2.56m
Closed Width	2.43m
Platform Size	1.83m x 0.91m
Rotation	180°
Max SWL	227kg
Weight	13500kg


Alternative machines

S65X
G65

Manufacturer

JLG



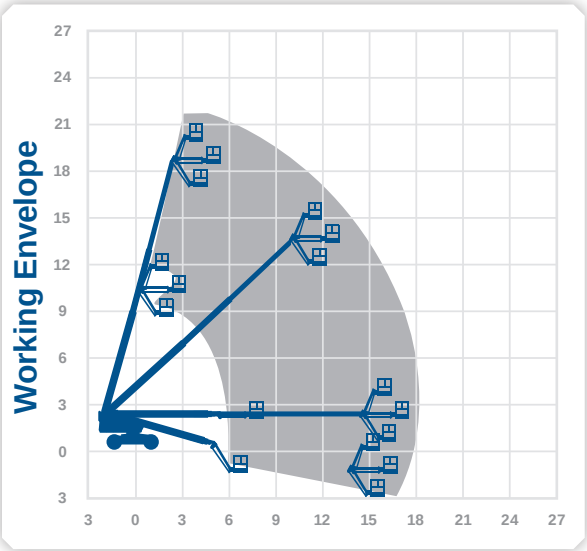


Your powered access solution is just a few clicks away. To find the right machine for your project, visit rapidaccess-gulf.com and follow our step by step 'New to Platforms' guide.

HA23RTJ

Working Height	**22.5m**
Horizontal Outreach	**18.3m**
Closed Length	10.4m
Closed Height	2.7m
Closed Width	2.47m
Platform Size	2.44m x 0.91m
Rotation	360˚
Max SWL	230kg
Weight	13400kg
Reach below ground	4.0m

Manufacturer
Haulotte



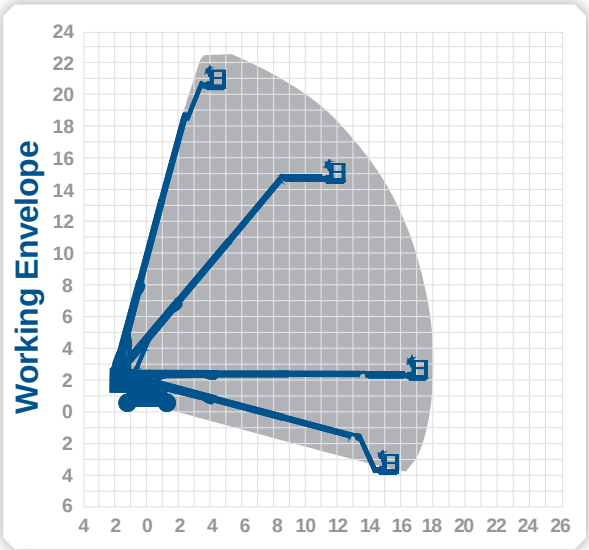

Rapid Access



contact@rapidaccess-gulf.com
rapidaccess-gulf.com


HA260PX

Working Height	**25.6m**
Horizontal Outreach	**16.2m**
Closed Length	12.0m
Closed Height	2.71m
Closed Width	2.38m
Platform Size	1.8m x 0.8m
Rotation	360˚
Max SWL	230kg
Weight	15890kg

Manufacturer

Haulotte



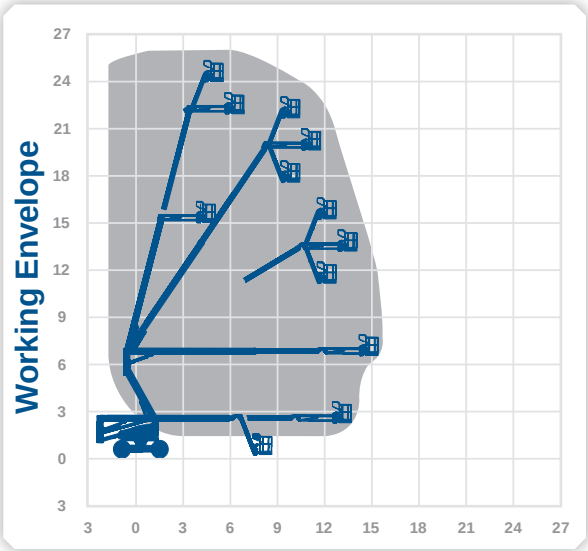

Rapid Access

Z80

booms

Working Height	**25.6m**
Horizontal Outreach	**18.29m**
Closed Length	11.27m
Closed Height	3.0m
Closed Width	2.49m
Platform Size	2.44m x 0.91m
Rotation	Continuous
Max SWL	227kg
Weight	17010kg


Alternative machines

80JX

Manufacturer

Genie



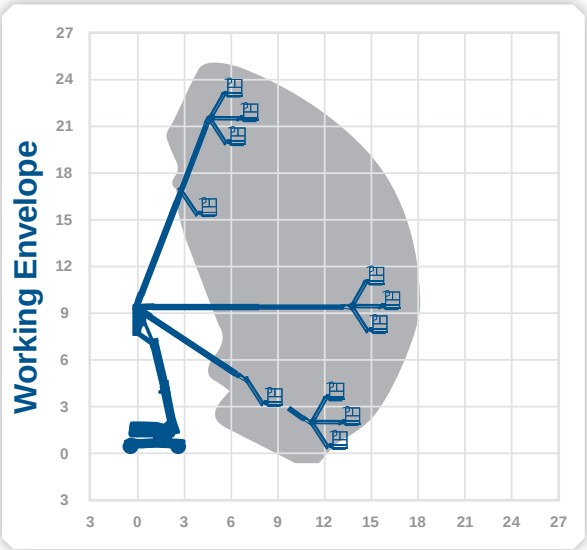



Learn more about our award-winning SkySiren® secondary guarding system by visiting the video gallery on rapidaccess-gulf.com

Working Height	**27.9m**
Horizontal Outreach	**23.32m**
Closed Length	11.12m
Closed Height	3.0m
Closed Width	2.44m
Platform Size	1.83m x 0.91m
Rotation	360°
Max SWL	230kg
Weight	16110kg


Alternative machines

Z80

Manufacturer

JLG

D | RT4 | A | 2 | IPAF 3b

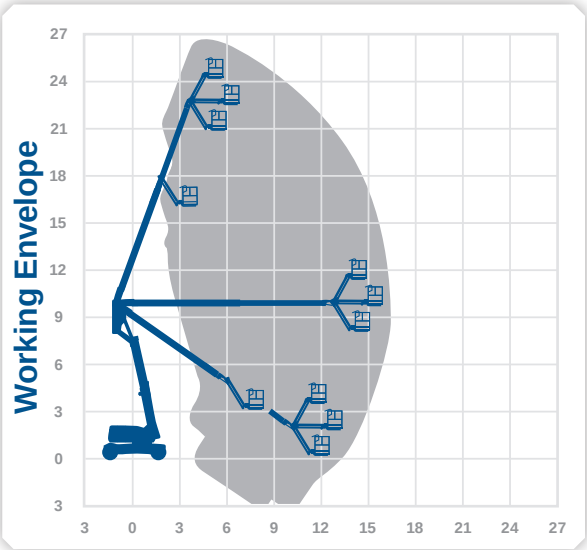


Rapid Access

Working Height	**26.38m**
Horizontal Outreach	**21.79m**
Closed Length	11.23m
Closed Height	2.8m
Closed Width	2.49m
Platform Size	1.83m x 0.76m
Rotation	360°
Max SWL	454kg
Weight	16103kg
Reach Below Ground	3.07m
Operational Full Width	1.85m

Manufacturer

Genie



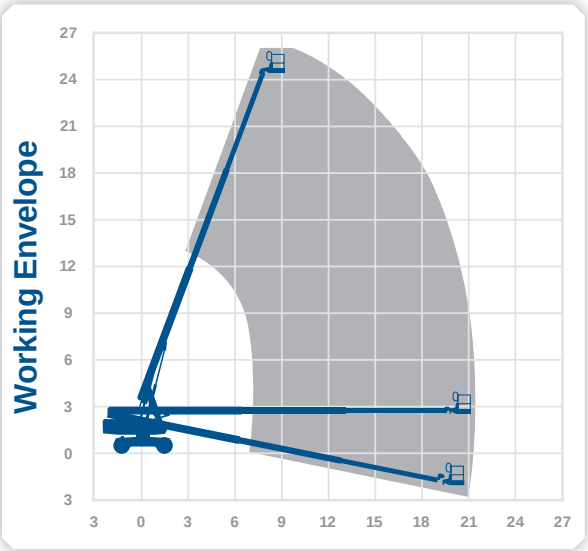

26.38m

21.79m

contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Working Height	**26.38m**
Horizontal Outreach	**23.32m**
Closed Length	12.4m
Closed Height	2.8m
Closed Width	2.5m
Platform Size	1.83m x 0.76m
Rotation	Continuous
Max SWL	227kg
Weight	17236kg
Reach Below Ground	2.89m


Alternative machines

860SJ
G85X

Manufacturer

Genie



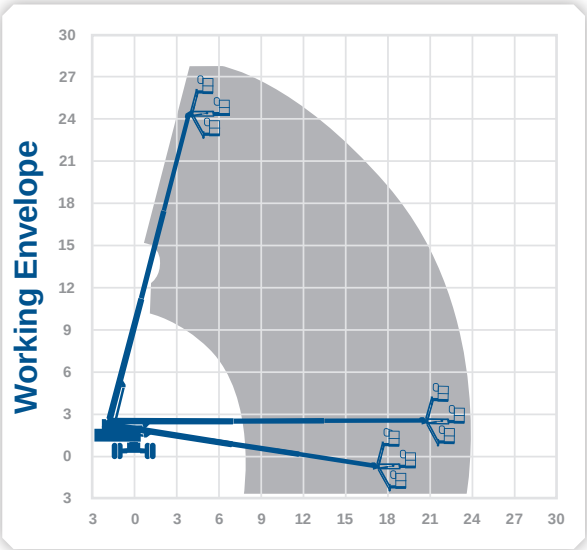

Rapid Access


HA26RTJPRO

booms

Working Height	**26.4m**
Horizontal Outreach	**17.5m**
Closed Length	11.8m
Closed Height	2.97m
Closed Width	2.48m
Platform Size	2.44m x 0.91m
Rotation	360°
Max SWL	250kg
Weight	15500kg

Manufacturer
Haulotte

D | 2 | RT4 | A | IPAF 3b

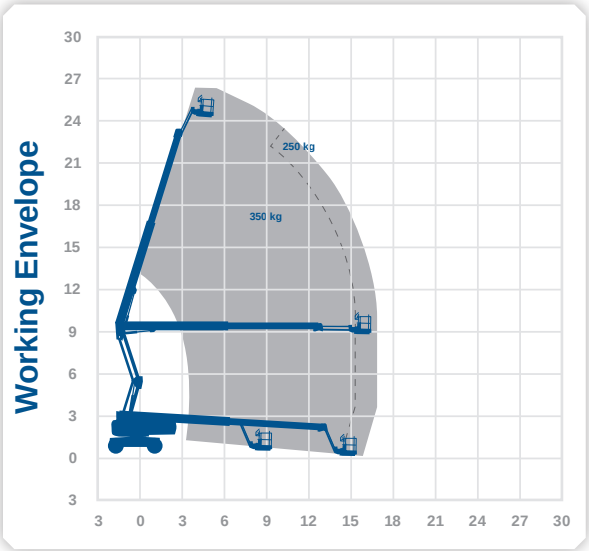

contact@rapidaccess-gulf.com
rapidaccess-gulf.com



Rapid Access

860SJ

booms

Working Height	**28.21m**
Horizontal Outreach	**22.86m**
Closed Length	12.19m
Closed Height	3.05m
Closed Width	2.49m
Platform Size	2.44m x 0.91m
Rotation	360°
Max SWL	230kg
Weight	17200kg
Reach Below Ground	3m


Alternative machines

G85X

Manufacturer

JLG



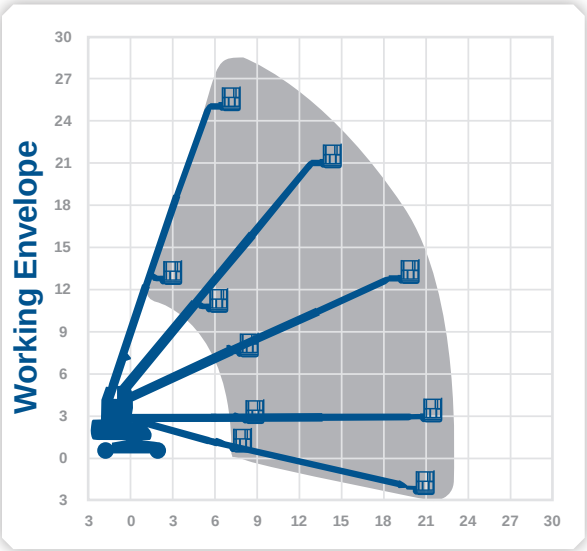

You can find the latest promotions, competitions and news from Rapid Access by following us on our social media pages.


Working Height	**31.8m**
Horizontal Outreach	**21.3m**
Closed Length	11.16m
Closed Height	2.7m
Closed Width	2.5m
Platform Size (extended)	0.80m x 2.44m (3.33)m
Rotation	Continuous
Max SWL	250kg
Weight	20800kg
Reach Below Ground	4m

Alternative machines

860SJ
G85X

Manufacturer

Haulotte

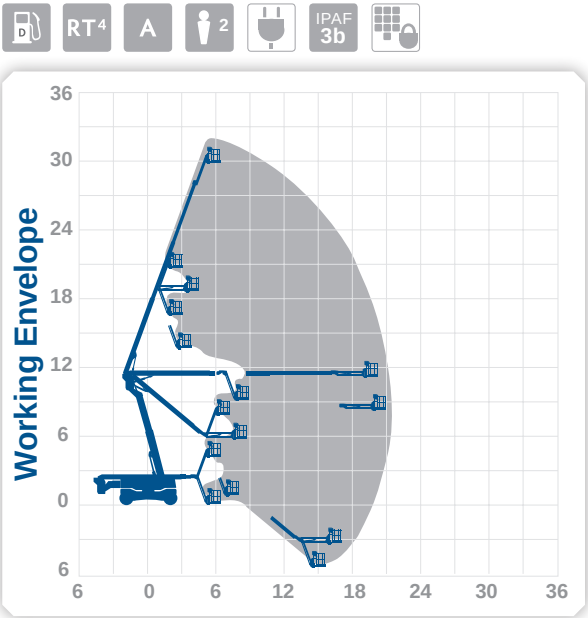

Rapid Access



contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Working Height	**38.5m**
Horizontal Outreach	**22.86m**
Closed Length	10.64m
Closed Height	3.05m
Closed Width	2.49m
Platform Size	2.44m x 0.91m
Rotation	Continuous
Max SWL (Unrestricted)	227kg
Max SWL (Restricted)	454kg
Weight	18500kg
Operational Full Width	3.81m


Alternative machines

S125

Manufacturer

JLG



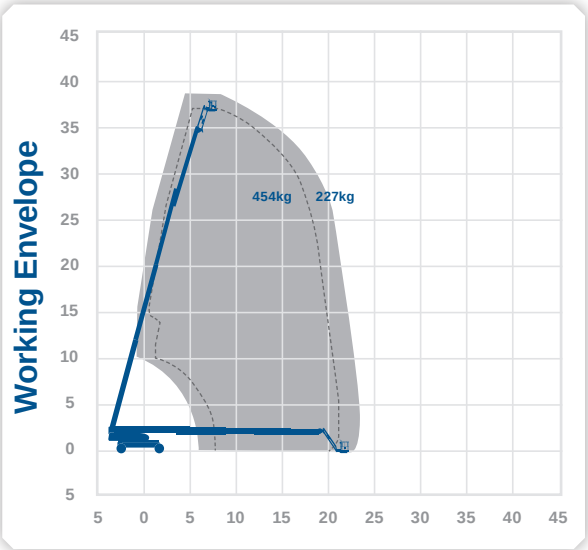

Rapid Access

1250AJP

booms

Working Height	**40.1m**
Horizontal Outreach	**19.25m**
Closed Length	11.45m
Closed Height	3.05m
Closed Width	2.49m
Platform Size	2.44m x 0.91m
Rotation	Continuous
Max SWL (Unrestricted)	227kg
Max SWL (Restricted)	454kg
Weight	19958kg
Operational Full Width	3.81m

Alternative machines

1350SJP
Z135


Manufacturer

JLG

40.1m

19.25m



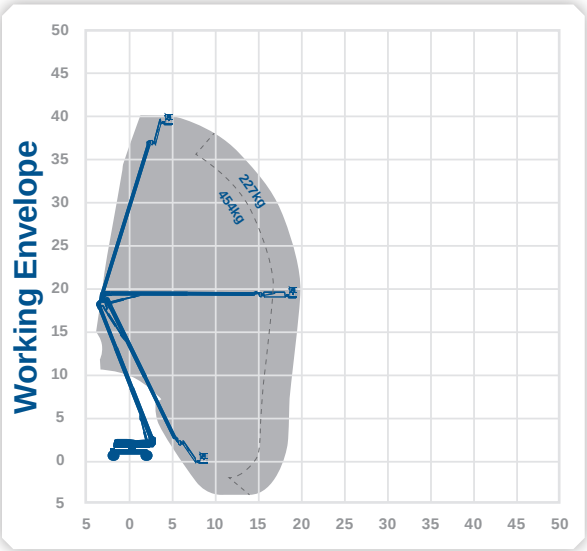

Making a positive impression


As a business, we are more than the services we provide; we are committed to making a positive impression on the workplaces, environments, markets and communities we serve.

Working Height	**40.15m**
Horizontal Outreach	**24.38m**
Closed Length	14.25m
Closed Height	3.05m
Closed Width	2.49m
Platform Size	1.83m x 0.76m
Rotation	360°
Max SWL	454kg
Weight	20700kg
Reach Below Ground	2.69m

Manufacturer

Genie

D | 2 | RT4 | S | IPAF 3b

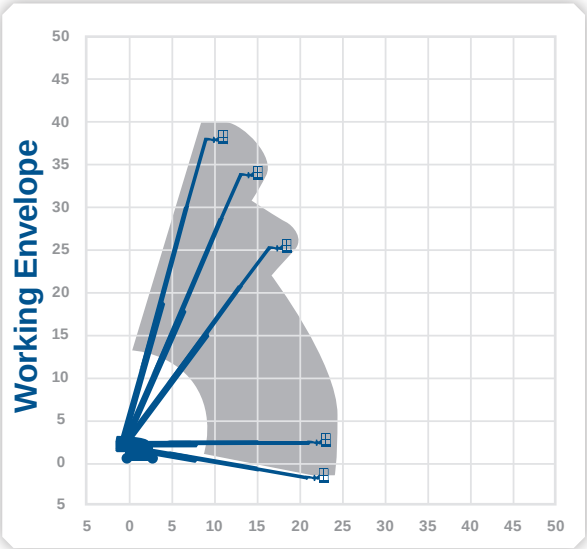

40.15m

24.38m

Rapid Access

Working Height	**40.15m**
Horizontal Outreach	**24.38m**
Closed Length	14.25m
Closed Height	3.07m
Closed Width	2.49m
Platform Size	2.44m x 0.91m
Rotation	Continuous
Max SWL	227kg
Weight	20248kg
Operational Full Width	3.35m

Alternative machines


1200SJP
1350SJP

Manufacturer

Genie

40.15m

24.38m

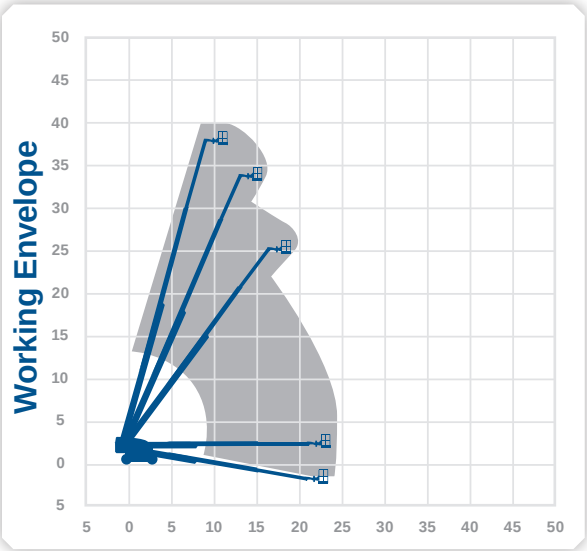


contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Working Height	**41.5m**
Horizontal Outreach	**19.8m**
Closed Length	12.6m
Closed Height	2.99m
Closed Width	2.5m
Platform Size	2.44m x 0.8m
Rotation	360°
Max SWL	230kg
Weight	23000kg

Manufacturer

Haulotte



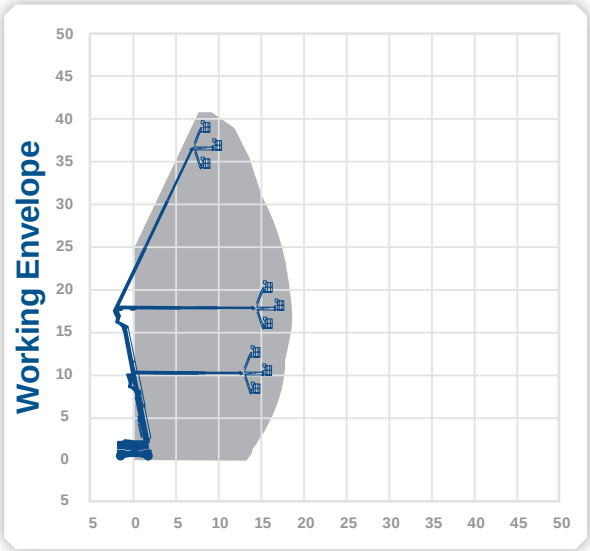

Rapid Access

HA41RTJPRO booms


Working Height	**41.5m**
Horizontal Outreach	**20.1m**
Closed Length	11.0m
Closed Height	2.99m
Closed Width	2.5m
Platform Size	2.44m x 0.91m
Rotation	360°
Max SWL	230kg
Weight	23900kg
Reach Below Ground	1.5m

Manufacturer

Haulotte

41.5m

20.1m

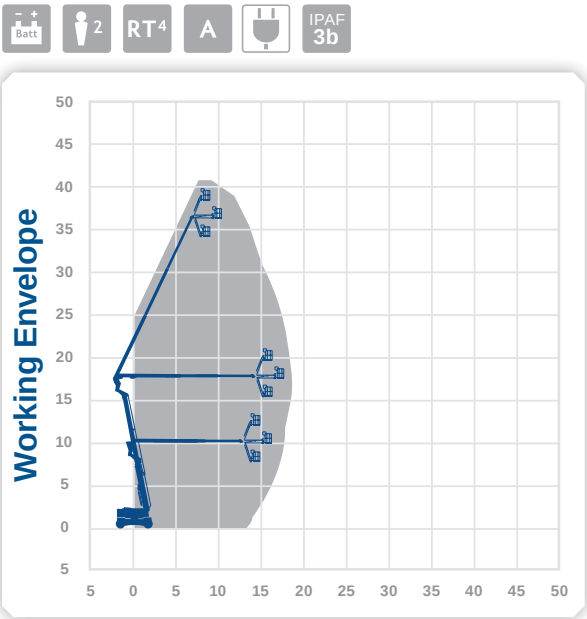

contact@rapidaccess-gulf.com

rapidaccess-gulf.com


HT43RTJPRO booms

Working Height	**42.2m**
Horizontal Outreach	**20.2m**
Closed Length	12.3m
Closed Height	3.05m
Closed Width	2.5m
Platform Size	2.44m x 0.91m
Rotation	360°
Max SWL	450kg
Weight	21400kg

Manufacturer

Haulotte

D | 2 | RT4 | S | IPAF 3b

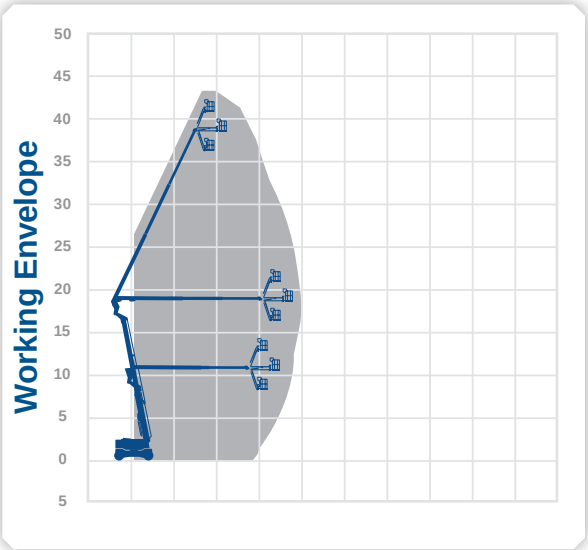

Rapid Access

Working Height	**43.15m**
Horizontal Outreach	**21.26m**
Closed Length	12.93m
Closed Height	3.07m
Closed Width	2.46m
Platform Size	2.44m x 0.91m
Rotation	Continuous
Max SWL	272kg
Weight	20366kg
Reach Below Ground	5.87m
Operational Full Width	3.94m


Alternative machines

1250AJP
1350SJP
150HAX

Manufacturer

Genie



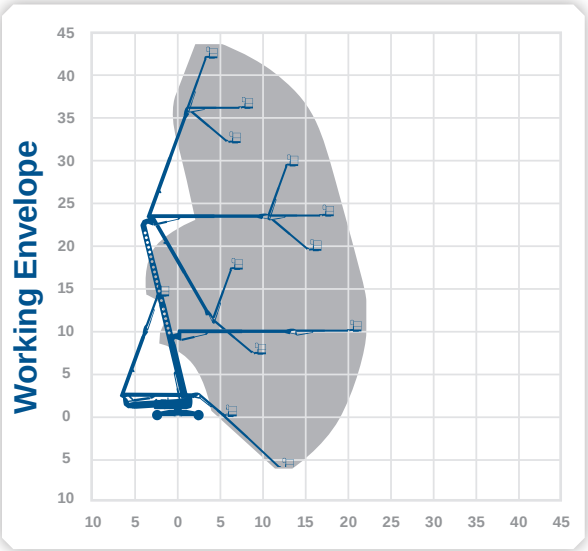



contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Working Height	**43.15m**
Horizontal Outreach	**21.26m**
Closed Length	12.93m
Closed Height	3.09m
Closed Width	2.49m
Platform Size	2.44m x 0.91m
Rotation	Continuous
Max SWL	272kg
Weight	20502kg
Reach Below Ground	5.87m
Operational Full Width	5.03m


Alternative machines

Z135
150HAX
1350SJP
1250AJP

Manufacturer

Genie



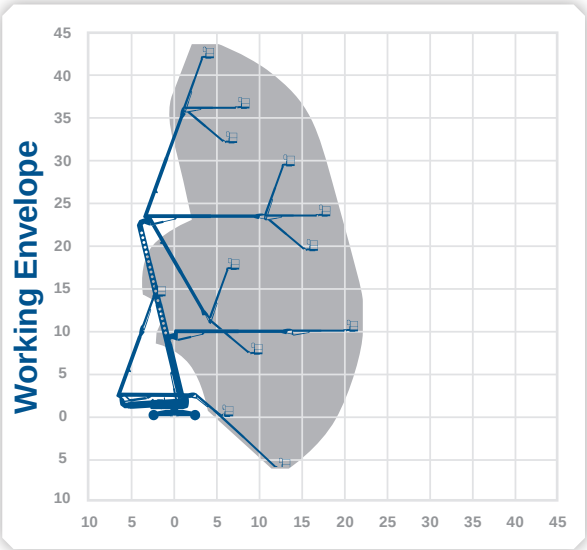

43.15m

21.26m

Rapid Access



contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Working Height 43.15m
Horizontal Outreach 27.43m

Closed Length	19.76m
Closed Height	3.05m
Closed Width	2.49m
Platform Size	0.91m x 2.44m
Rotation	360°
Max SWL	454kg
Weight	21546kg
Reach Below Ground	6.0m
Operational Full Width	3.94m


Alternative machines

SX135H

Manufacturer

Genie



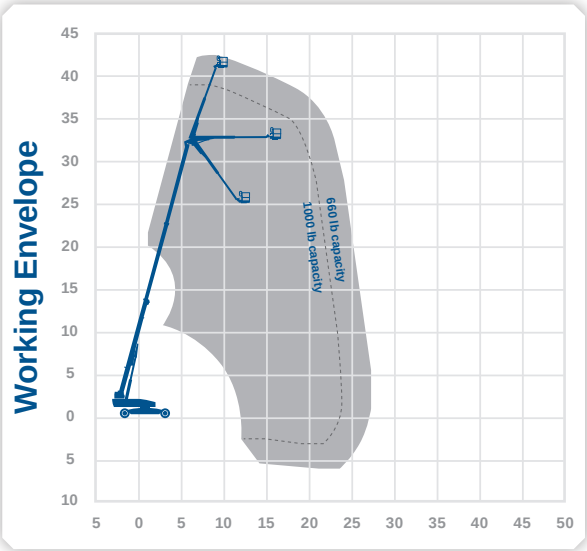

43.15m

27.43m

Rapid Access

1350SJP

Working Height	**43.1m**
Horizontal Outreach	**24.38m**
Closed Length	11.86m
Closed Height	3.05m
Closed Width	2.49m
Platform Size	2.44m x 0.91m
Rotation	Continuous
Max SWL (Unrestricted)	227kg
Max SWL (Restricted)	454kg
Weight	20400kg
Operational Full Width	3.81m

Alternative machines

Z135
1200SJP
S125


Manufacturer

JLG

43.1m

24.38m



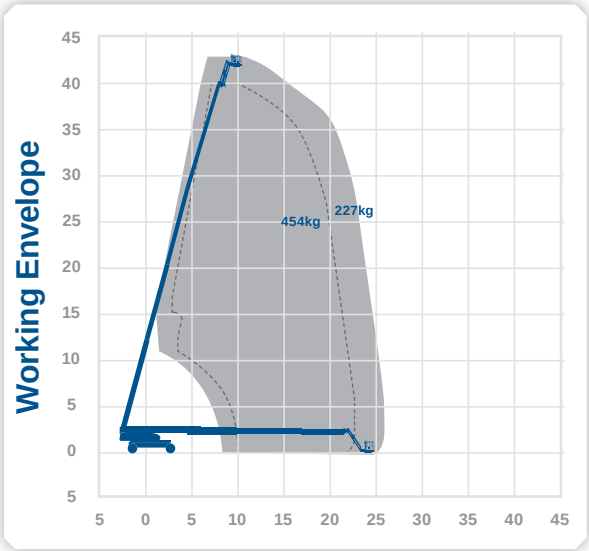

contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Working Height	**47.72m**
Horizontal Outreach	**24.15m**
Closed Length	12.01m
Closed Height	4.27m
Closed Width	3.51m
Platform Size	2.44m x 0.91m
Rotation	Continuous
Max SWL (Unrestricted)	227kg
Max SWL (Restricted	454kg
Weight	26500kg
Reach Below Ground	9.25m
Operational Full Width	5.49m


Alternative machines

T50JB
Z135

Manufacturer

JLG



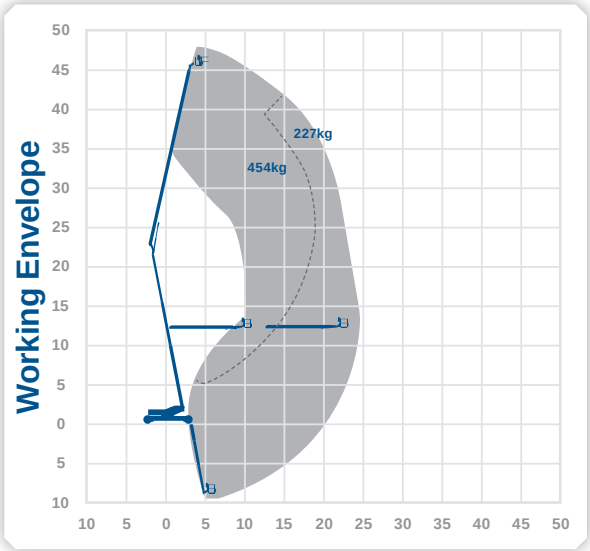

Rapid Access

Working Height	**48.02m**
Horizontal Outreach	**24.38m**
Closed Length	16.18m
Closed Height	3.05m
Closed Width	2.49m
Platform Size	2.44m x 0.91m
Rotation	Continuous
Max SWL	340kg
Weight	23236kg
Reach Below Ground	0.91m
Operational Full Width	5.03m

Alternative machines

SX180


Manufacturer

Genie

48.02m

24.38m



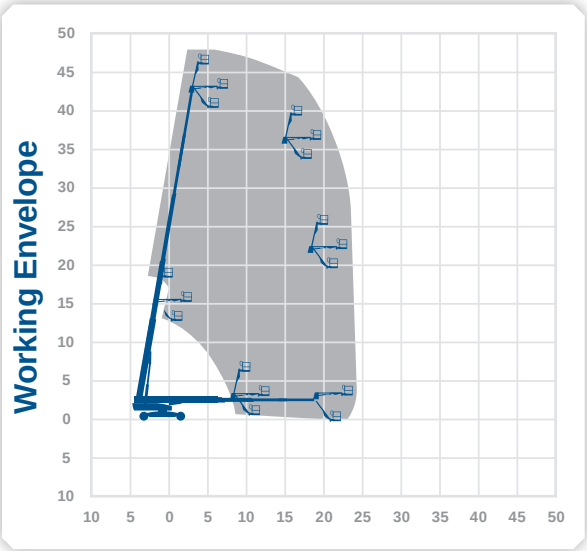

contact@rapidaccess-gulf.com
rapidaccess-gulf.com


Working Height	**56.86m**
Horizontal Outreach	**24.38m**
Closed Length	14.33m
Closed Height	3.05m
Closed Width	2.49m
Platform Size	0.91m X 2.44m
Rotation	Continuous
Max SWL	340kg
Weight	25095kg
Operational Full Width	5.03m

Manufacturer
Genie

56.86m

24.38m



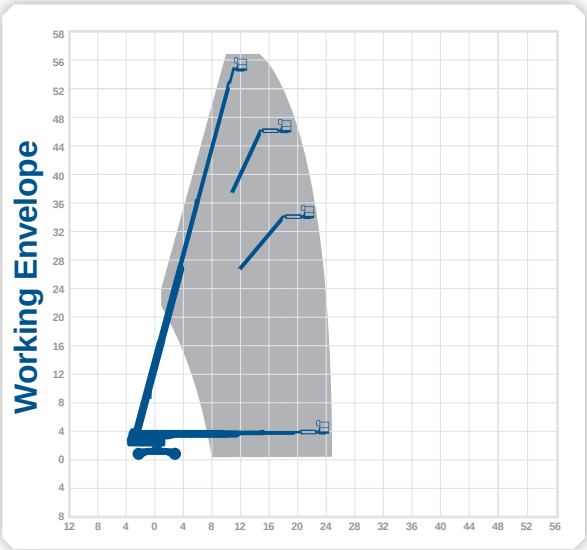

Rapid Access



contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Tracked Boom Lifts



Contact our hire team for expert advice and assistance

contact@rapidaccess-gulf.com

rapidaccess-gulf.com

Tracked Boom Lifts

- Available to hire on either operated or self-operated basis
- Can be operated with IPAF 1b license
- Allows access to restricted areas that traditional booms can't
- Lithium battery models are available
- Reduces the ground bearing pressure on soft ground and delicate flooring
- Allows greater stability for work on uneven surfaces
- Easily transportable
- Can be used for a variety of applications including facilities management and retail
- Working heights up to 25m

For more information please call your local depot (refer to page 5) or visit **rapidaccess-gulf.com**




Hinowa 1470

tracked booms

Working Height	**14.0m**
Horizontal Outreach	**7.0m**
Closed Length	4.06m
Closed Height	1.99m
Rails Up / Fixed Rails	
Closed Width	0.78m
DeckSize	1.33m x 0.69m
Rotation	360º
SWL	200kg
Weight	1750kg
Outrigger Footprint	2.7m x 2.7m
Min Op Width	2.7m

Manufacturer
Hinowa



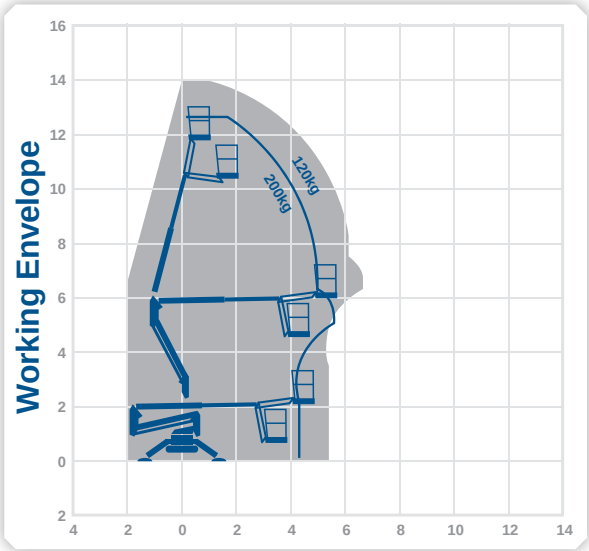

Rapid Access


Lightlift 15.70

tracked booms

Working Height	**15.4m**
Horizontal Outreach	**6.6m**
Closed Length	4.02m
Closed Height	1.99m
Rails Up / Fixed Rails	
Closed Width	0.75m
DeckSize	1.33m x 0.69m
Rotation	360º
SWL	230kg
Weight	1950kg
Outrigger Footprint	2.8m x 2.8m
Min Op Width	2.8m

Manufacturer
Hinowa



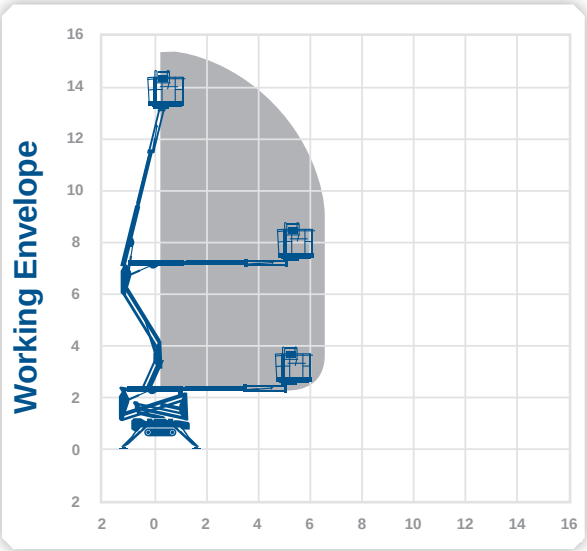

contact@rapidaccess-gulf.com
rapidaccess-gulf.com


LEO18GT

tracked booms

Working Height	**17.6m**
Horizontal Outreach	**7.4m**
Closed Length	4.71m
Closed Height Rails Up / Fixed Rails	2.0m
Closed Width	0.78m
DeckSize	1.42m x 1.1m
Rotation	355º
SWL	200kg
Weight	2400kg
Outrigger Footprint	3.32m x 3.13m
Min Op Width	2.88m

Manufacturer

Teupen

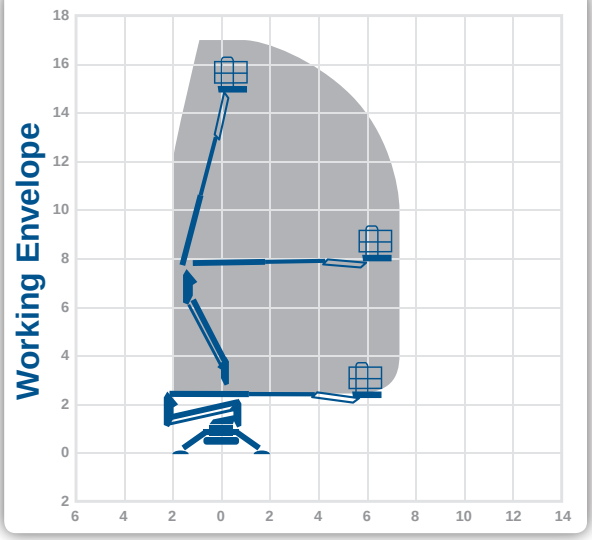

Rapid Access


Hinowa 1965

tracked booms

Working Height	**18.8m**
Horizontal Outreach	**6.4m**
Closed Length	4.45m
Closed Height Rails Up / Fixed Rails	2.0m
Closed Width	1.48m
DeckSize	1.30m x 1.1m
Rotation	360°
SWL	200kg
Weight	2080kg
Outrigger Footprint	2.9m x 2.9m
Min Op Width	n/a

Manufacturer
Hinowa



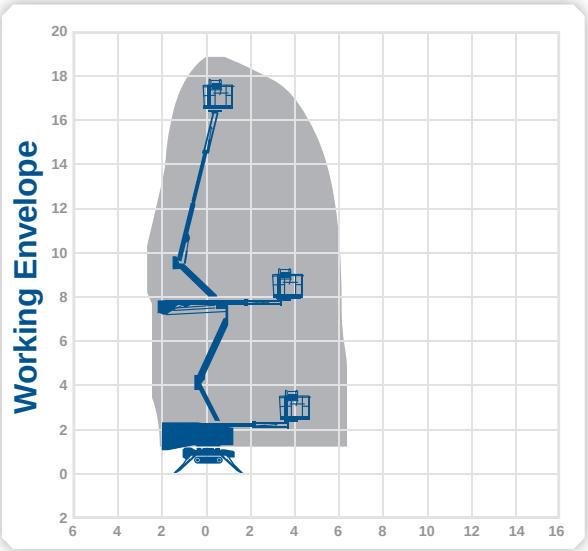

contact@rapidaccess-gulf.com
rapidaccess-gulf.com


Lightlift 20.10

tracked booms

Working Height	**20.1m**
Horizontal Outreach	**9.7m**
Closed Length	5.01m
Closed Height	1.99m
Rails Up / Fixed Rails	
Closed Width	0.79m
DeckSize	1.33m x 0.69m
Rotation	360º
SWL	230kg
Weight	2880kg
Outrigger Footprint	2.92m x 2.92m
Min Op Width	2.92m

Manufacturer
Hinowa



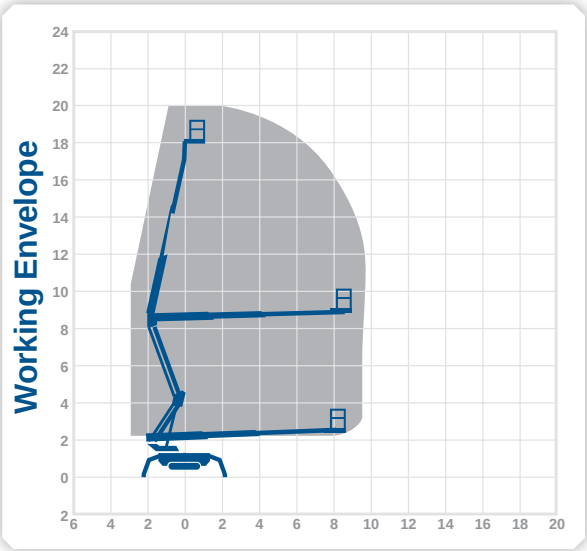

Rapid Access


DL21

tracked booms

Working Height	**21.0m**
Horizontal Outreach	**10.0m**
Closed Length	8.05m
Closed Height Rails Up / Fixed Rails	2.46m
Closed Width	2.07m
DeckSize	2.44m x 0.91m
Rotation	360º
SWL	200kg
Weight	2500kg
Outrigger Footprint	3.75m x 4.40m
Min Op Width	2.92m

Manufacturer
Denka Lift



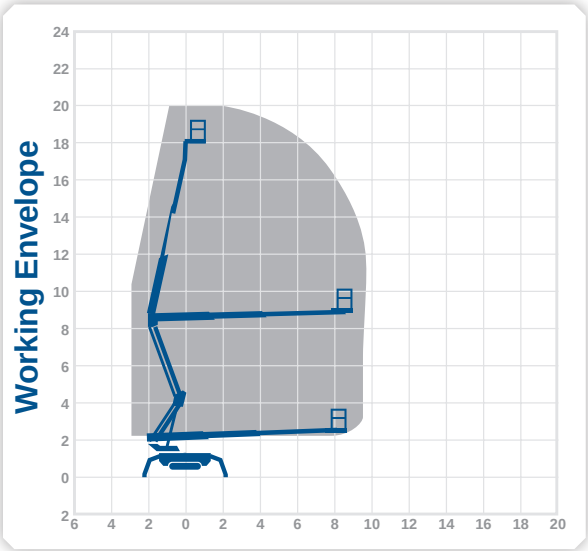


contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Working Height	**25.6m**
Horizontal Outreach	**13.1m**
Closed Length	6.35m
Closed Height Rails Up / Fixed Rails	1.99m
Closed Width	0.99m
DeckSize	1.34m x 0.69m
Rotation	360°
SWL	230kg
Weight	4365kg
Outrigger Footprint	5.4m x 3.9m

Manufacturer

JLG

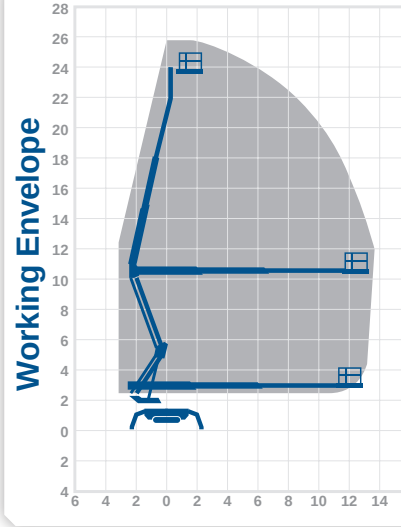

Rapid Access



contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Truck Mounted



Contact our hire team for expert advice and assistance

contact@rapidaccess-gulf.com

rapidaccess-gulf.com

Truck Mounted

- Working heights up to 32m
- Self drive option available
- Most cost effective method of access for short term hires
- Models with SWL of up to 320kg

For more information please call your local depot (refer to page 5) or visit **rapidaccess-gulf.com**



Working Height	22.0m
Outreach	17.5m
Max Reach Below 0m	n/a
Overall Travel Length	9.2m
Overall Travel Height	3.5m
Overall Travel Width	2.4m
Platform Cage Size	1.8m x 1.1m
Max SWL*	280kg
Gross Vehicle Weight	7500kg
Operational Full Width	4.5m
Minimum Operational Width	2.5m
Point Load Front / Rear	60kN/60kN


Alternative machines

T22GS
T22GSH

Manufacturer

Ascendant



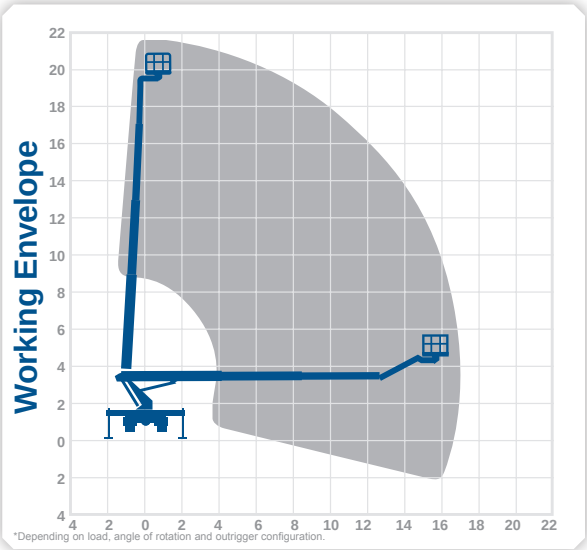

*Depending on load, angle of rotation and outrigger configuration.

Rapid Access


T27R

truck mounts

Working Height	**27.0m**
Outreach**	**21.0m** (100kg)
Max Horiz. Outreach (full SWL)	16.0m
Max Reach Below 0m	n/a
Overall Travel Length	7.87m
Overall Travel Height	3.3m
Overall Travel Width	2.54m
Platform Cage Size	1.85m x 1.0m
Max SWL	320kg
Gross Vehicle Weight	7500kg
Operational Full Width	5.1m
Minimum Operational Width	2.5m
Point Load Front / Rear	72kN/55kN

Manufacturer
Ruthmann



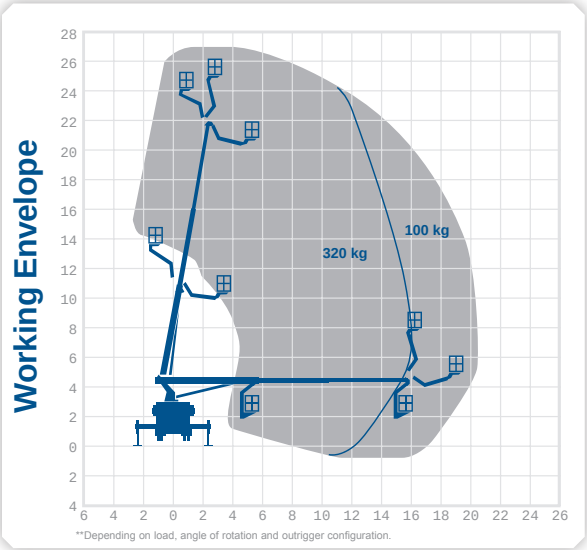


**Depending on load, angle of rotation and outrigger configuration.

contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Working Height	**32.0m**
Outreach	**20.0m**
Max Reach Below 0m	n/a
Overall Travel Length	8.4m
Overall Travel Height	3.84m
Overall Travel Width	2.5m
Platform Cage Size	2.4m x 0.8m
Max SWL	280kg
Gross Vehicle Weight	17520kg
Operational Full Width	3.75m
Minimum Operational Width	3.75m
Point Load Front / Rear	140kN/140kN

Manufacturer
CTE



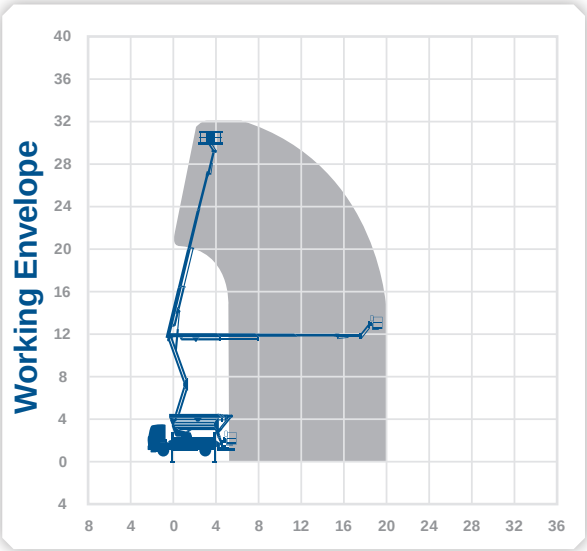

Rapid Access



contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Telehandlers



Contact our hire team for expert advice and assistance

contact@rapidaccess-gulf.com

rapidaccess-gulf.com

Telehandlers

- Ideal for lifting heavy materials to height
- Rough terrain forklifts
- Large lift capacity

For more information please call your local depot (refer to page 5) or visit **rapidaccess-gulf.com**




HTL 4017

telehandlers

Max Lift Height	**16.70m**
Max Forward Reach	**12.85m**
Overall Length	6.70m
Overall Height	2.60m
Overall Width	2.43m
Max Capacity	4000kg
Max Lift Capacity (full reach)	700kg
Gross Vehicle Weight	11710kg

Manufacturer
Haulotte

RT4

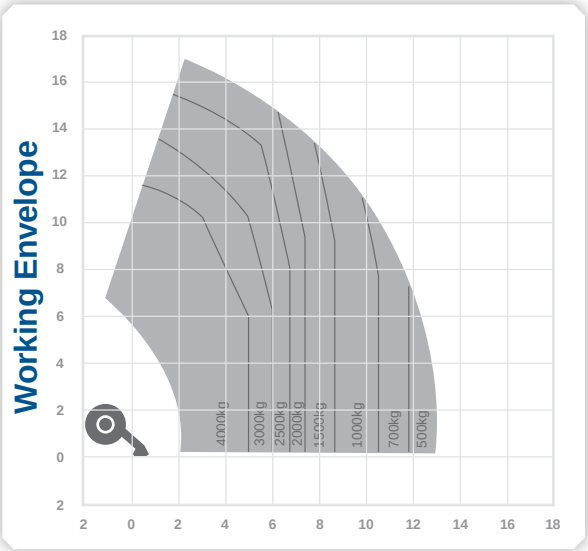

Rapid Access



contact@rapidaccess-gulf.com
rapidaccess-gulf.com


Useful Information



Contact our hire team for expert advice and assistance

contact@rapidaccess-gulf.com

rapidaccess-gulf.com

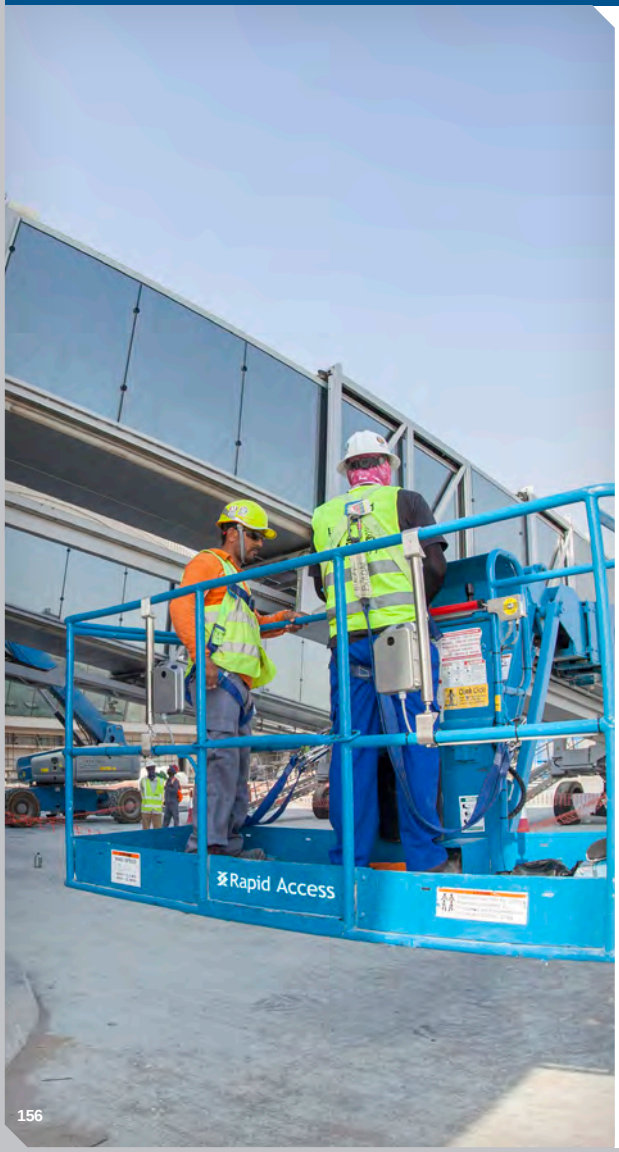
Rapid Access

Distance Conversion

Metric to Imperial

(m x 3.281 = ft)

m		ft	m		ft
6.0	-	19'8"	39.5	-	129'7"
6.5	-	21'4"	40.0	-	131'3"
7.0	-	23'0"	40.5	-	132'10"
7.5	-	24'7"	41.0	-	134'6"
8.0	-	26'4"	41.5	-	136'2"
8.5	-	27'11"	42.0	-	137'10"
9.0	-	29'4"	42.5	-	139'6"
9.5	-	31'2"	43.0	-	141'1"
10.0	-	32'10"	43.5	-	142'9"
10.5	-	34'6"	44.0	-	144'5"
11.0	-	36'1"	44.5	-	146'0"
11.5	-	37'10"	45.0	-	147'7"
12.0	-	39'5"	45.5	-	149'3"
12.5	-	41'0"	46.0	-	150'11"
13.0	-	42'8"	46.5	-	152'7"
13.5	-	44'3"	47.0	-	154'3"
14.0	-	45'11"	47.5	-	155'10"
14.5	-	47'7"	48.0	-	157'6"
15.0	-	49'2"	48.5	-	159'1"
15.5	-	50'10"	49.0	-	160'9"
16.0	-	52'6"	49.5	-	162'5"
16.5	-	54'1"	50.0	-	164'1"
17.0	-	55'9"	50.5	-	165'9"
17.5	-	57'5"	51.0	-	167'4"
18.0	-	59'1"	51.5	-	168'11"
18.5	-	60'8"	52.0	-	170'7"
19.0	-	62'3"	52.5	-	172'3"
19.5	-	63'11"	53.0	-	173'10"
20.0	-	65'7"	53.5	-	175'6"
20.5	-	67'3"	54.0	-	177'2"
21.0	-	68'11"	54.5	-	178'10"
21.5	-	70'7"	55.0	-	180'6"
22.0	-	72'2"	55.5	-	182'1"
22.5	-	73'9"	56.0	-	183'9"
23.0	-	75'6"	56.6	-	185'4"
23.5	-	77'1"	57.0	-	187'0"
24.0	-	78'9"	57.5	-	188'8"
24.5	-	80'4"	58.0	-	190'3"
25.0	-	82'0"	58.5	-	191'11"
25.5	-	83'7"	59.0	-	193'7"
26.0	-	85'3"	59.5	-	195'2"
26.5	-	86'11"	60.0	-	196'9"
27.0	-	88'7"	60.5	-	198'6"
27.5	-	90'3"	61.0	-	200'1"
28.0	-	91'9"	61.5	-	201'9"
28.5	-	93'6"	62.0	-	203'5"
29.0	-	95'1"	62.5	-	205'0"
29.5	-	96'9"	63.0	-	206'8"
30.0	-	98'4"	63.5	-	208'3"
30.5	-	100'1"	64.0	-	209'11"
31.0	-	101'10"	64.5	-	211'8"
31.5	-	103'5"	65.0	-	213'3"
32.0	-	105'0"	65.5	-	214'11"
32.5	-	106'8"	66.0	-	216'6"
33.0	-	108'3"	66.5	-	218'3"
33.5	-	109'11"	67.0	-	219'10"
34.0	-	111'7"	67.5	-	221'6"
34.5	-	113'2"	68.0	-	223'1"
35.0	-	114'10"	68.5	-	224'9"
35.5	-	116'6"	69.0	-	226'4"
36.0	-	118'1"	69.5	-	228'0"
36.5	-	119'9"	70.0	-	229'8"
37.0	-	121'5"	70.5	-	231'4"
37.5	-	123'0"	71.0	-	232'11"
38.0	-	124'8"	71.5	-	234'7"
38.5	-	126'4"	72.0	-	236'2"
39.0	-	127'11"	72.5	-	237'5

Imperial to Metric

(ft x 0.3048 = m)

ft		m
15	-	4.57
20	-	6.10
25	-	7.62
30	-	9.14
35	-	10.67
40	-	12.19
45	-	13.72
50	-	15.24
55	-	16.76
60	-	18.29
65	-	19.81
70	-	21.34
75	-	22.86
80	-	24.38
85	-	25.91
90	-	27.43
95	-	28.96
100	-	30.48
105	-	32.00
110	-	33.53
115	-	35.05
120	-	36.58
125	-	38.10
130	-	39.62
135	-	41.15
140	-	42.67
145	-	44.20
150	-	45.72
155	-	47.24
160	-	48.77
165	-	50.29
170	-	51.82
175	-	53.34
180	-	54.86
185	-	56.39
190	-	57.91
195	-	59.44
200	-	60.96
205	-	62.48
210	-	64.01
215	-	65.53
220	-	67.06
225	-	68.58
230	-	70.10
235	-	71.63
240	-	73.15
245	-	74.68
250	-	76.20
255	-	77.72
260	-	79.24
265	-	80.77
270	-	82.30
275	-	83.82

Weight Conversion

Metric to Imperial

(kg x 2.204 = lbs)

kg	lbs	kg	lbs
500 -	1,102	27,000 -	59,524
1,000 -	2,204	27,500 -	60,627
1,500 -	3,306	28,000 -	61,729
2,000 -	4,409	28,500 -	62,831
2,500 -	5,511	29,000 -	63,933
3,000 -	6,613	29,500 -	65,036
3,500 -	7,716	30,000 -	66,138
4,000 -	8,818	30,500 -	67,240
4,500 -	9,920	31,000 -	68,343
5,000 -	11,023	31,500 -	69,445
5,500 -	12,125	32,000 -	70,547
6,000 -	13,227	32,500 -	71,650
6,500 -	14,330	33,000 -	72,752
7,000 -	15,432	33,500 -	73,854
7,500 -	16,534	34,000 -	74,957
8,000 -	17,636	34,500 -	76,059
8,500 -	18,739	35,000 -	77,161
9,000 -	19,841	35,500 -	78,264
9,500 -	20,943	36,000 -	79,366
10,000 -	22,046	36,500 -	80,468
10,500 -	23,148	37,000 -	81,570
11,000 -	24,250	37,500 -	82,673
11,500 -	25,353	38,000 -	83,775
12,000 -	26,455	38,500 -	84,877
12,500 -	27,557	39,000 -	85,980
13,000 -	28,660	39,500 -	87,082
13,500 -	29,762	40,000 -	88,184
14,000 -	30,864	40,500 -	89,287
14,500 -	31,966	41,000 -	90,389
15,000 -	33,069	41,500 -	91,491
15,500 -	34,171	42,000 -	92,594
16,000 -	35,273	42,500 -	93,696
16,500 -	36,376	43,000 -	94,798
17,000 -	37,478	43,500 -	95,900
17,500 -	38,580	44,000 -	97,003
18,000 -	39,683	44,500 -	98,105
18,500 -	40,785	45,000 -	99,207
19,000 -	41,887	45,500 -	100,310
19,500 -	42,990	46,000 -	101,412
20,000 -	44,092	46,500 -	102,514
20,500 -	45,194	47,000 -	103,617
21,000 -	46,297	47,500 -	104,719
21,500 -	47,399	48,000 -	105,792
22,000 -	48,501	48,500 -	106,924
22,500 -	49,603	49,000 -	108,026
23,000 -	50,706	49,500 -	109,128
23,500 -	51,808	50,000 -	110,231
24,000 -	52,910	50,500 -	111,333
24,500 -	54,013	51,000 -	112,435
25,000 -	55,115	51,500 -	113,537
25,500 -	56,217	52,000 -	114,640
26,000 -	57,320	52,500 -	115,742
26,500 -	58,422	53,000 -	116,844

Imperial to Metric

(lbs x 0.4536 = kg)

lbs	kg	lbs	kg
1,000 -	453	54,000 -	24,493
2,000 -	907	55,000 -	24,947
3,000 -	1,360	56,000 -	25,401
4,000 -	1,814	57,000 -	25,854
5,000 -	2,267	58,000 -	26,308
6,000 -	2,721	59,000 -	26,761
7,000 -	3,175	60,000 -	27,215
8,000 -	3,628	61,000 -	27,669
9,000 -	4,082	62,000 -	28,122
10,000 -	4,535	63,000 -	28,576
11,000 -	4,989	64,000 -	29,029
12,000 -	5,443	65,000 -	29,483
13,000 -	5,896	66,000 -	29,937
14,000 -	6,350	67,000 -	30,390
15,000 -	6,803	68,000 -	30,844
16,000 -	7,257	69,000 -	31,297
17,000 -	7,711	70,000 -	31,751
18,000 -	8,164	71,000 -	32,205
19,000 -	8,618	72,000 -	32,658
20,000 -	9,071	73,000 -	33,112
21,000 -	9,525	74,000 -	33,565
22,000 -	9,979	75,000 -	34,019
23,000 -	10,432	76,000 -	34,472
24,000 -	10,886	77,000 -	34,926
25,000 -	11,339	78,000 -	35,380
26,000 -	11,793	79,000 -	35,833
27,000 -	12,246	80,000 -	36,287
28,000 -	12,700	81,000 -	36,740
29,000 -	13,154	82,000 -	37,194
30,000 -	13,607	83,000 -	37,648
31,000 -	14,061	84,000 -	38,101
32,000 -	14,514	85,000 -	38,555
33,000 -	14,968	86,000 -	39,008
34,000 -	15,422	87,000 -	39,462
35,000 -	15,875	88,000 -	39,916
36,000 -	16,329	89,000 -	40,369
37,000 -	16,782	90,000 -	40,823
38,000 -	17,236	91,000 -	41,276
39,000 -	17,690	92,000 -	41,730
40,000 -	18,143	93,000 -	42,184
41,000 -	18,597	94,000 -	42,637
42,000 -	19,050	95,000 -	43,091
43,000 -	19,504	96,000 -	43,544
44,000 -	19,958	97,000 -	43,998
45,000 -	20,411	98,000 -	44,452
46,000 -	20,865	99,000 -	44,905
47,000 -	21,318	100,000 -	45,359
48,000 -	21,772	101,000 -	45,812
49,000 -	22,226	102,000 -	46,266
50,000 -	22,679	103,000 -	46,719
51,000 -	23,133	104,000 -	47,173
52,000 -	23,586	105,000 -	47,628
53,000 -	24,040	106,000 -	48,081

Index

Product Code

Product Code	Page Number
3219	41
3220	46
3226	52
3246	57
4626	50
4632	59
1200SJP	119
1250AJP	120
1350SJP	130
150HAX	131
3394RT	66
4069-O	79
439RT	67
45JSX	84
600AJX	99
66JX	106
80JX	111
860SJ	116
COMPACT 10	55
COMPACT 10N	54
COMPACT 12	63
COMPACT 12DX	65
COMPACT 12SX	64
COMPACT 14	68
COMPACT 15SX	71
COMPACT 18SX	73
COMPACT 8	48
DL21	142
E45AJ	85
ECO WR	31
ECOLIFT	30
EX2032	47
EX2646	51
G30N	78
G60X	102
GR12	36
GR15	37
GS1932	43
GS2032	44
GS2632	53
GS2646	49
GS32D	60
GS3369BE	61
GS3369RT	58
GS4047	69
GS43	72
GS53	74
HA120PX	81
HA12CJ+	79
HA16RTJ	95
HA20PX	103
HA20RTJPRO	98
HA23RTJ	107
HA260PX	109
HA26RTJPRO	114
HA32PX	117
HA41PXNT	123
HA41RTJPRO	124
HINOWA 1470	137
HINOWA 1965	140
HR12NB	80
HR15NB	83
HT43RTJPRO	125
HTL 4017	152
LEO18GT	139
LIGHTLIFT 15.70	138
LIGHTLIFT 20.10	141
M60J	101
NANO	32
NANO SP	33
NANO SP+	34
OPTIMUM 8	42
PECOLIFT	29
POWERTOWER	35
S125	122
S45X	87
S60X	100
S65X	105
S80X	112
S85	113

Product Code

Product Code	Page Number	Product Code	Page Number
SX125XC	121	Z45B	92
SX135XC	129	Z45BJ	90
SX150	132	Z45DJX	94
SX180	133	Z45DJXC	88
T22M	147	Z45DX	89
T27R	148	Z45EJ	91
T32C	149	Z51D	96
X26	143	Z60-37FE	97
Z135	126	Z62/40	104
Z30NRJ	77	Z80	110
Z34-22BE	82	ZX135/70	127

Low Level Access

Product Code	Page Number	Product Code	Page Number
PECOLIFT	29	NANO SP+	34
ECOLIFT	30	POWERTOWER	35
ECO WR	31	GR12	36
NANO	32	GR15	37
NANO SP	33		

Scissor Lifts

Product Code	Page Number	Product Code	Page Number
3219	41	4632	59
OPTIMUM 8	42	GS32D	60
GS1932	43	GS3369BE	61
GS2032	44	COMPACT 12	63
3220	46	COMPACT 12SX	64
EX2032	47	COMPACT 12DX	65
COMPACT 8	48	3394RT	66
GS2646	49	439RT	67
4626	50	COMPACT 14	68
EX2646	51	GS4047	69
3226	52	4069-O	79
GS2632	53	COMPACT 15SX	71
COMPACT 10N	54	GS43	72
COMPACT 10	55	COMPACT 18SX	73
3246	57	GS53	74
GS3369RT	58		

Boom Lifts

Product Code	Page Number	Product Code	
Z30NRJ	77	Z45DX	89
G30N	78	Z45BJ	90
HA12CJ+	79	Z45EJ	91
HR12NB	80	Z45B	92
HA120PX	81	Z45DJX	94
Z34-22BE	82	HA16RTJ	95
HR15NB	83	Z51D	96
45JSX	84	Z60-37FE	97
E45AJ	85	HA20RTJPRO	98
S45X	87	600AJX	99
Z45DJXC	88	S60X	100

Boom Lifts Continued

Product Code	Page Number	Product Code	Page Number
M60J	101	1200SJP	119
G60X	102	1250AJP	120
HA20PX	103	SX125XC	121
Z62/40	104	S125	122
S65X	105	HA41PXNT	123
66JX	106	HA41RTJPRO	124
HA23RTJ	107	HT43RTJPRO	125
HA260PX	109	Z135	126
Z80	110	ZX135/70	127
80JX	111	SX135XC	129
S80X	112	1350SJP	130
S85	113	150HAX	131
HA26RTJPRO	114	SX150	132
860SJ	116	SX180	133
HA32PX	117		

Tracked Booms

Product Code	Page Number
HINOWA 1470	137
LIGHTLIFT 15.70	138
LEO18GT	139
HINOWA 1965	140
LIGHTLIFT 20.10	141
DL21	142
X26	143

Truck Mounted

Product Code	Page Number
T22M	147
T27R	148
T32C	149

Telehandlers

Product Code	Page Number
HTL 4017	152