

Emergency Lowering Instructions

JLG Scissor Lifts

Machine Range: E3 Series - 1932, 2033, 2046 and 2646



If there is a machine breakdown or if the operator becomes incapacitated it may be necessary to perform an emergency rescue from the ground.



Warning

While every effort is made to ensure that the information provided is accurate and up to date, we are not able to guarantee the completeness and accuracy of these instructions and you should therefore not rely on them. Nationwide Platforms Ltd accepts no liability for reliance on the contents of this information sheet which has been produced as additional GUIDANCE ONLY and is not intended to replace the manufacturer's manual. You should refer to the manufacturer's manual.

You should not operate this Mobile Elevating Work Platform (MEWP) unless you are suitably trained and fully familiarised with its operation and the emergency procedures set out in the manufacturer's manual. Operating plant necessarily involves risk of injury to the person.



Before starting work consider the following:

- Will there be a second person in the vicinity of the machine to undertake a rescue if required?
- Have both the operator and rescuer been familiarised with the ground controls?
- Can the rescuer gain access to the ground controls? i.e. Ensure that the machine is not parked with the ground controls facing a wall or similar obstruction.
- Is the key in the ground control to allow the rescuer to switch power from basket to ground controls?



Before attempting to lower platform:


- It is imperative that an inspection be carried out to ensure the lowering of the platform is not hindered by obstructions such as steel work, pipes, cables, etc. It may be necessary to retract the extension deck prior to lowering.
- If the operator has been incapacitated ensure they will not be put in additional danger by lowering of the platform. Remember that completing a rescue in 4-6 minutes is critical.
- If unsure seek help (it may be necessary to carry out a mid air rescue).
- Carefully plan each action before starting to lower the platform.

C

Lowering the platform using base controls:

Warning: do not hold onto or place any part of the body through the scissor arms due to crushing risk.

- 1 Check for any obstructions.
- 2 Turn Key Switch fully clockwise to "base" position.
- 3 Pull out or twist Emergency Stop.
- 4 Operate and hold Function Switch in downwards position.
- 5 The platform should lower until it is 7 ft (2.1m) from the ground and then stop.
- 6 Release Function Switch and check for obstructions in scissor pack and that no one is standing under the extension deck if extended.
- 7 Operate and hold Function Switch in downwards position until platform fully lowered.

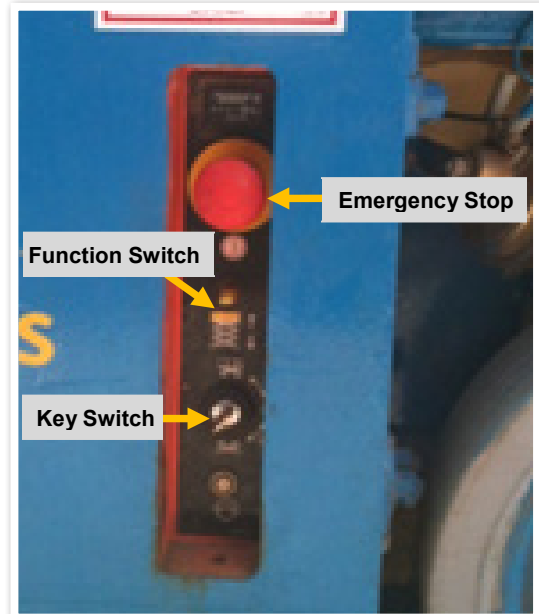


Machine shown is a 1932E3. Position of Emergency Handle and base controls may vary but controls on all have the same function.

D

Lowering the platform using emergency lowering handle:

Warning: do not hold onto or place any part of the body through the scissor arms due to crushing risk.

- 1 Check for any obstructions.
- 2 Pull and hold the red Emergency Lowering Handle located either at the side or the rear of the machine base depending on the model (you should hear a hissing sound as the oil flows back through the system).
- 3 Lower the platform until it is approximately 7 ft (2.1m) from the ground and release the Emergency Lowering Handle to stop the descent.
- 4 Check for obstructions in scissor pack and that no one is standing under the extension deck if extended.
- 5 Pull and hold the Emergency Lowering Handle to lower platform fully.

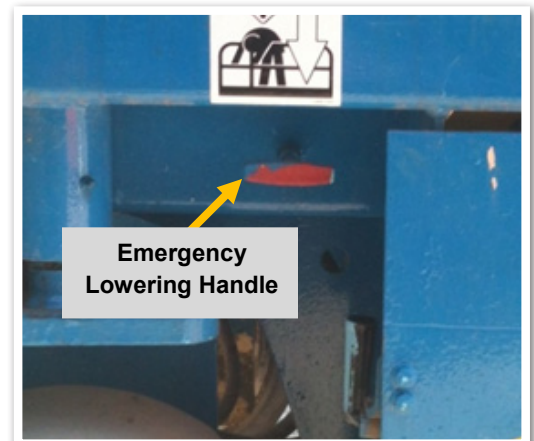

E

Technical advice and training courses

If the controls do not function or you are unsure of their operation please call our Technical Support team on 0845 745 0000 option 3.

As the UK's largest training provider in our industry, we have a range of courses to help you and your operators to work efficiently and safely at height.

Contact us for full details of courses and dates.