



Welcome to our powered access selection guide. Inside you'll find all the information you need to begin working safely and effectively at height.

To get you started we've included comprehensive guidance on our leading product range, as well as advice on the accessories, innovations and training that'll help you succeed on your next task or project.

Remember, if you want to get in touch with us at any point whilst you're browsing, you can give us a call with any enquiries, feedback or hire requests.

contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Powered Access Selection Guide

contact@rapidaccess-gulf.com
rapidaccess-gulf.com



How to use this Product Selection Guide

This guide is designed to help you select and order the correct piece of equipment for your needs.


Each section is conveniently separated by product type and machines are arranged in order of ascending height.

The working envelope and height/reach indicator will provide a quick visual reference to assist your equipment selection.


If you cannot find exactly what you're looking for, need more information, or wish to order equipment, call our expertly trained staff on contact@rapidaccess-gulf.com


Key Standard features

 Battery power	 Tracked
 Diesel power	 Mast boom
 Lithium battery	 Articulating boom
 Hybrid power	 Straight telescopic boom
 Dual fuel option	 Non-marking tyres
 Gas power option	 Outrigger legs
 Rough terrain (2 wheel drive)	 Maximum people in cage*
 Rough terrain (4 wheel drive)	 Push around vehicles
 IPAF licence type	 Operator powered
 IPAF licence type	 Indoor use only
 IPAF licence type	 Self drive
 IPAF licence type	 JIB rotation
 IPAF licence type	 Driving licence type

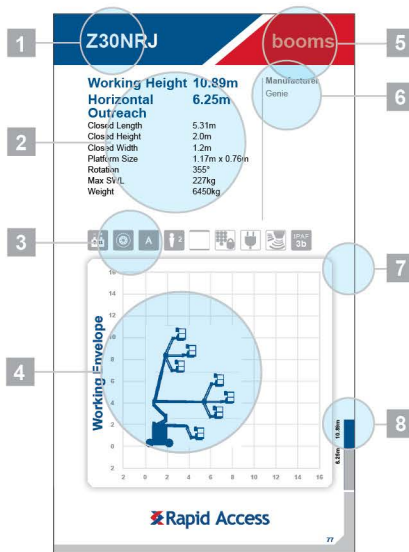

Height and outreach

 Working height

 Horizontal outreach

Optional extras

 SkySiren®	 SkyScreen™
 SkySiren® PCS™	 Material Handling Attachments
 SkySentry™	 Power to platform
 SkyRak®	 Generator
 SkyRakPlus®	 Camera pod
 SkyRakBoom®	 Circular camera cage
 SkyTel™	 Wendy lighting frame

- Product Code**
Unique reference number for product.
(Please note this will not necessarily correspond with the original manufacturer's model number or product code)
- Specification**
These details include product dimensions, Safe Working Load (SWL), platform area, rotation and machine weight.
- Key**
These symbols indicate standard features and optional extras available to hire with the platform. See left for key table.
- Working Envelope**
This shows the area of working space provided by the product.
- Product Type**
Indicates classification of powered access unit, e.g. machine types: low level access, scissor lift, boom lift, truck mounted platform, specialist boom or telehandler.
- Alternative Machines**
Indicates alternative or similar machines.
- Working Height**
The blue column indicates the safe operating vertical height.
- Horizontal Outreach**
The grey column indicates the safe operating outreach.

Product Selection App

The Product Selection App from Rapid Access



To download our
FREE App search for
'Rapid Access' on the
App Store

1.

Select the
direction
required...

2.

Where you're
working...

3.

The ground
conditions and
surface types...

4.

Any access
restrictions or
considerations...

5.

And the
maximum
height and
reach you need.



Visit your app store and
search for 'Rapid Access'



Contents

Use this guide to find your perfect powered access solution.

Each section in this guide has been created to allow you to browse, select and order your ideal machine, attachments and accessories.

Information

4 - 9

Welcome 4

Useful Numbers 5

Global Reach 6

Choosing a Machine 7

Equipment Selection 8 - 9

Safety Value Chain 11 - 13

Training 14 - 15

Preventing Unauthorised Use 16

Operator Safety 17

Controlling Materials at Height 18 - 24

Maintenance &
Inspection Processes 25

Product Specification

Low Level Access

27 - 38

Scissor Lifts

39 - 74

Boom Lifts

75 - 134

Tracked Boom Lifts

135 - 144

Truck Mounted

145 - 150

Telehandlers

151 - 154

Useful Information

155 - 162

Distance Conversion

157

Weight Conversion

158

Index

By Product Code

159 - 160

By Machine Type

161-162

Welcome

We are Rapid Access, the Middle East's largest provider of powered access solutions which includes access platform hire, equipment sales and IPAF training.

We're proud to offer you the widest selection of powered access equipment in the region, including a complete range of boom lifts, scissor lifts, low level access platforms and truck mounted platforms. We also provide a fleet of track mounted booms and specialist equipment, such as tracked access and narrow spider machines, to fulfil all your access platform requirements.

We operate from nine depot locations across six GCC countries, supplying a diverse fleet of more than 4,500 machines to enable safe, productive and successful work at height.

With safety, productivity and convenience at the heart of all we deliver, our products and services can help you to achieve your working at height goals, whatever the task.

Use this guide as a starting point for selecting your powered access solution.



Useful Numbers

Depot Locations

Middle East	Dubai	800 222 377
	Abu Dhabi	800 222 377
	Qatar	+974 404 19888
	Kuwait	+965 220 87811
	Bahrain	+973 177 06036
	Oman	+968 220 35350
	Saudi Arabia	800 1 222 377

International Projects +971 4 885 9090



Global Reach

Global business dedicated to local service

Rapid Access is a subsidiary of the Loxam Group. Loxam and its subsidiaries have a network of 750 branches in 21 countries and benefits from the third largest fleet of powered access equipment worldwide. This international coverage and extensive range of specialist equipment ensures constant quality of service and advice.

All Loxam branches are staffed by highly trained professionals who understand even the most specialised needs and are committed to delivering local support throughout all stages of the hire regardless of where the customer is located.

Should you have a project outside the GCC that you require assistance with, please call your local Rapid Access depot.

For more information regarding the Loxam Group www.loxamgroup.com



Choosing a Machine

Product Overview

Whether you're new to powered access, or work with the machine every day, we're here to help you find the ideal solution for working at height.

With so many different types of machines available to get you to the height you need, look to us for complete guidance on your ideal hire.



Low Level Access

Offering working heights up to 5.1m, low level access equipment is ideal for indoor applications including retail, warehouse and facilities management. Many models can easily fit into lifts and through standard doors.



Scissor Lifts

Delivering working heights from 8m to 18m, we offer scissor lifts suitable for indoor and outdoor use.



Boom Lifts

Our boom range includes straight and articulating models with working heights from 8m to 57m, with a variety of power options available.



Track Mounted Boom Lifts

We have specialist platforms and spider lifts available for working in a range of indoor and outdoor environments, including finished or uneven terrain.



Truck Mounted Lifts

Truck mounted lifts make it possible to work from public highways and can easily be moved from site to site.



Attachments and Accessories

Our pioneering range of innovations and accessories enable you to overcome the challenges posed by work at height, including material handling, entrapment, unauthorised machine use and more.

Equipment Selection

Considerations in selecting the right equipment for your task.

Before you get started, it's essential you make sure you have the right training to work safely and legally. See page 14 to learn more about our training services.

1

Height & Outreach

Do I need to reach a height straight up or do I need to reach up and then over?

For vertical access, scissor lifts may be best. When working over racking and shelving, mast booms are ideal. When working over obstacles, articulated booms provide a versatile solution.

2

Environment

Will I be working indoors or outdoors?

Use a zero emission electric machine indoors, and in general a diesel machine outdoors. For versatility, consider a dual fuel unit.


3

Terrain

What are the ground conditions I'll be working on?

If you're working indoors, consider non-marking tyres. On rough terrain select a four wheel drive option and select outriggers on sloping ground.

To help you find the ideal machine for your next job; visit our website and use our New to Platforms selector, download our new product selector App, or call us at your nearest depot.



4

Access

Are there any access restrictions to entering the working environment?

Do machines have to pass through doorways and lift shafts? Does the site have plant weight restrictions?

5

Working height

How far up and how far out do I need to reach?

Always check the working envelope diagrams to ensure the outreach required can be achieved at the height(s) you need to carry out your task. Also consider that maximum working heights are assumed as 2m above the platform height (feet level).

6


Hire duration

How long do I need a machine for?

We offer machine hires from one day to many years, as well as equipment for outright purchase.



Safety Value Chain

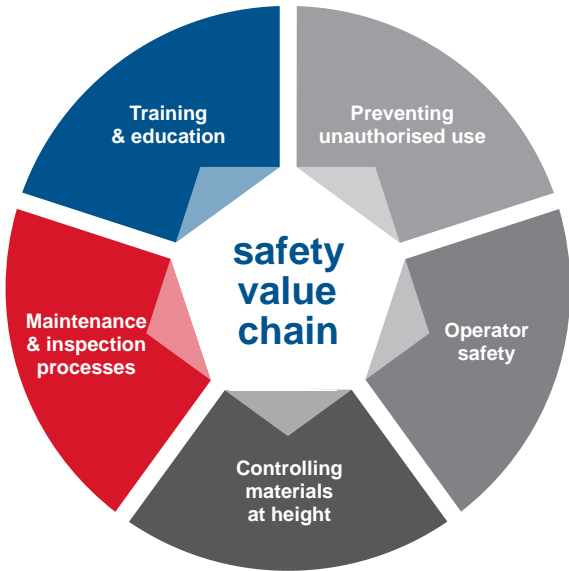

Contact our hire team for expert advice and assistance

contact@rapidaccess-gulf.com

rapidaccess-gulf.com

Safety Value Chain



Safety Value Chain

At Rapid Access, we believe in helping our customers to ensure they achieve maximum benefit from their use of powered access equipment.

We call this our 'Safety value chain'.

This complete approach to safe and effective working at height has been designed to help your business achieve best practice on every site, project and task.

The sections below and in the following pages, describe our unique Safety Value Chain.



Training

IPAF Training Courses

With more IPAF instructors, training centres and experience in delivering courses than anyone else, you can rely on us to get you trained and ready to work safely on your next project.



Our IPAF Operator courses are available to complete at training centres across the GCC and can even be held on your own site.

1a Static Vertical Personnel Platform



1b Static Boom



3a Mobile Vertical



3b Mobile Boom



Push Around Vertical (PAV)



Advanced Operator Training



Our complete range of training courses are ideal for anyone looking for advanced or specialist training.

Our additional range of training for powered access users includes:

IPAF MEWPs for Managers

The essential one day course for individuals managing, supervising or planning work at height.



We also offer a complete range of courses accredited and approved by:



Learn more about our complete range of training courses by visiting rapidaccess-gulf.com/training

Preventing Unauthorised Use



SkySentry™



SkySentry™ is a simple and effective fleet management system designed to help you reduce costs, drive efficiency and improve safety.



SkySentry™ is a full service system designed to improve the management of your powered access fleet across multiple sites and safeguard against unauthorised use.

The system offers unrivalled access and visibility of not only who is operating a machine at any one time. But also if they are correctly trained and authorised to do so.




Look for the SkySentry icon to identify which machines can benefit from this feature.

Learn more about SkySentry by visiting rapidaccess-gulf.com/safety-and-innovations/skysentry

Operator Safety

SkySiren®

The SkySiren® is the pioneering Secondary Guarding solution from Rapid Access; designed to reduce the risks associated with entrapment.



When an operator enters into an entrapment scenario, SkySiren® has been designed to simultaneously stop the motion of the platform and trigger a flashing light and warning siren. This allows the operator to attempt self rescue, meanwhile alerting colleagues and people on the ground that they need to carry out an emergency lowering procedure.



The unique pressure sensitive system, acts as an 'emergency switch' in an entrapment situation. It is designed to react to the body pressure of an operator trapped against the boom lift's control panel and prevent further involuntary operation of the machine.

The SkySiren® is a CE Certified retro-fit system capable of being fitted to most boom-type MEWPs.




Look for the SkySiren® icon to identify which machines can benefit from this unique attachment.

Learn more about SkySiren® by visiting rapidaccess-gulf.com/safety-and-innovations/skysiren

Controlling Materials at Height

To aid the safe and effective installation of a range of materials at height, we are pleased to provide a unique range of award-winning Material Handling Attachments (MHAs).



Attachments in our range provide solutions to aid the installation, maintenance, and dismantling of a range of materials at height, including piping, ducting, steel and timber beams and cladding.


All of our MHAs have been designed to provide the following benefits:

- Minimise the risk of manual handling related injuries to operators
- Facilitate the safe and secure transit of materials from floor to point of work
- Minimise the risk of materials falling from height
- Aid the safe and efficient handling of materials at height



SkyRak®

Fits most small electric scissor lifts to enable the fast and safe installation of materials up to 150kg (300kg if fitted as double and MEWP capacity allows). Materials are securely fastened using the straps provided.



The unique design of the SkyRak® means the load weight is transferred to the platform floor, avoiding materials being rested on the non-load bearing hand-rails.


SkyRak® fits most small electric scissor lifts to enable the fast and safe installation of materials at height.



Look for the SkyRak® icon to identify which machines can benefit from this unique attachment.

Learn more about SkyRak® by visiting rapidaccess-gulf.com/safety-and-innovations/skyrak




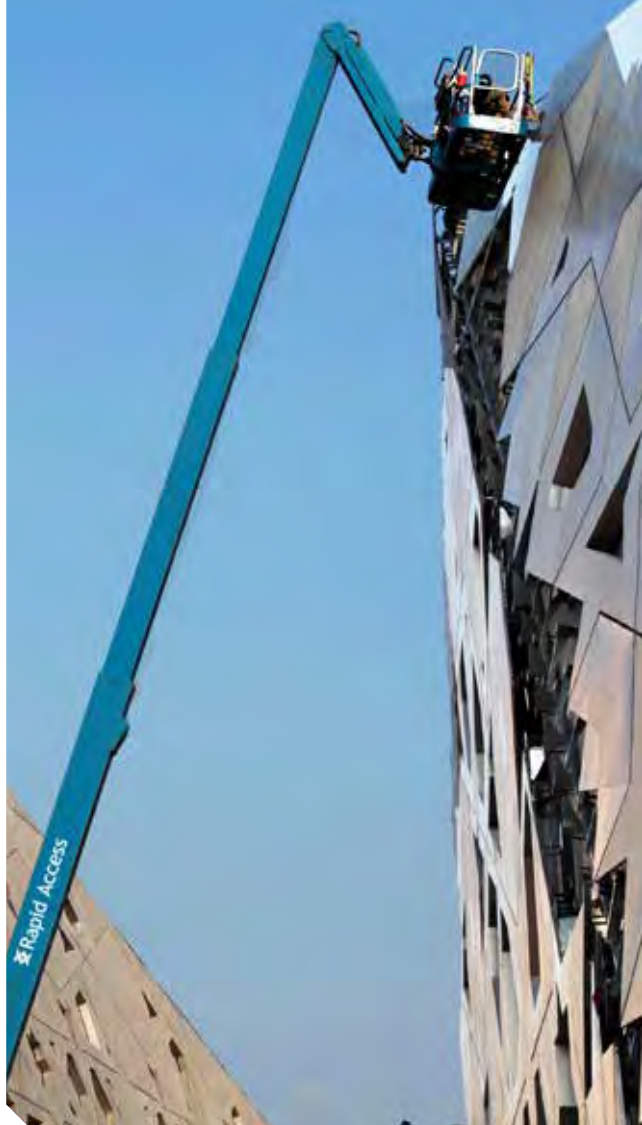

Controlling Materials at Height

SkyRakPlus®

SkyRakPlus® allows materials up to 600kg to be safely stored on most large decked diesel scissor lifts, with no weight put on the MEWP handrail.

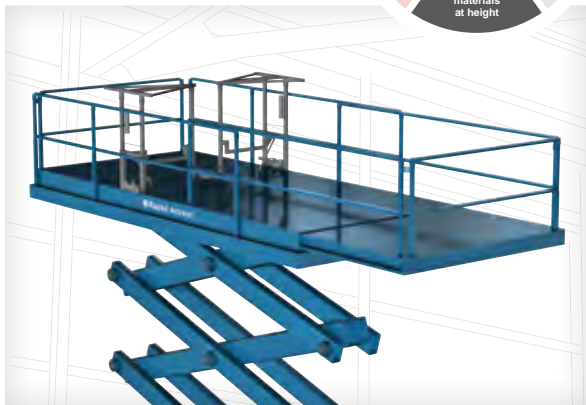

A system of flexible heads support a wide variety of materials of many shapes and sizes including pipes, ducting, cladding, steelwork and bus bars.

When the MEWP is in motion, the materials are secured by use of moveable pins and straps.



Look for the SkyRakPlus® icon to identify which machines can benefit from this unique attachment.

Learn more about SkyRakPlus® by visiting rapidaccess-gulf.com/safety-and-innovations/skyrakplus



Controlling Materials at Height

SkyRakBoom®

SkyRakBoom® allows the safe storage of materials up to 90kg in weight. Materials are stored with no weight on the MEWP's handrails.



Whilst the boom is in operation, materials are safely secured using the straps provided which significantly reduces the risk of materials falling to the ground.

SkyRakBoom® is suitable for installation to all standard Genie 1.8m and 2.4m 'boom-type' baskets.



Look for the SkyRakBoom® icon to identify which machines can benefit from this unique attachment.

Learn more about SkyRakBoom® by visiting rapidaccess-gulf.com/safety-and-innovations/skyrakboom

Maintenance & Inspection Processes

Rapid Access aims to achieve world class standards of equipment preparation and reliability. Our approach begins with providing a safe and productive working environment and is underpinned by an ongoing commitment to seek best practice and drive innovation.



The pioneering processes that make a difference:

Technical Excellence (TechX)

TechX is our business' commitment to delivering the highest technical standards in all of our depots, regardless of their size or location.

That's why all of our depots are maintained to the highest levels of organisation and cleanliness, making them look different to many of the other depots you will have seen anywhere in the world.

It's by taking the extra steps to manage our locations that we can guarantee the equipment we provide to keep you safe is given the careful and close management it deserves.

Planned Preventative Maintenance (PPM)

As a leader in the supply of powered access, we know that our engineering expertise is paramount in delivering the service that puts your wellbeing first. PPM is our unprecedented approach to enhancing the reliability and effectiveness of our fleet by targeting the equipment that we believe requires greater attention. That means we're able to resolve issues before they ever even become visible.

What's more, we know that a machine meeting our highest technical standards will also be the safest machine we can provide.



Low Level Access



Contact our hire team for expert advice and assistance

contact@rapidaccess-gulf.com

rapidaccess-gulf.com

Low Level Access

- Working heights up to 6.2m
- Lightweight models from 184kg
- Non marking tyres for use on finished floors
- Versatile and easy to use
- Suitable for confined spaces
- Push around units available for ultimate control and manoeuvrability
- Powered and non-powered access platforms available

For more information please call your local depot (refer to page 5) or visit rapidaccess-gulf.com



Working Height 3.5m

Closed Length	0.98m
Closed Height	1.55m
Closed Width	0.75m
Platform Size	0.72m x 0.60m
Max SWL	150kg
Weight	180kg


Alternative machines

NANO
NANO SP
NANO SP+
Pecolift
PowerTower

Manufacturer

PowerTower

Indoor use only

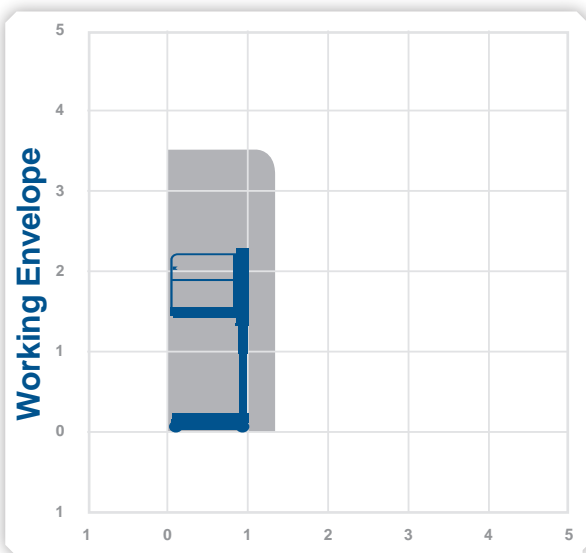

Working Height 4.2m

Closed Length	1.28m
Closed Height	1.95m
Closed Width	0.74m
Platform Size	0.85m x 0.64m
Max SWL	150kg
Weight	305kg


Alternative machines

ECO WR

Manufacturer

PowerTower

Indoor use only

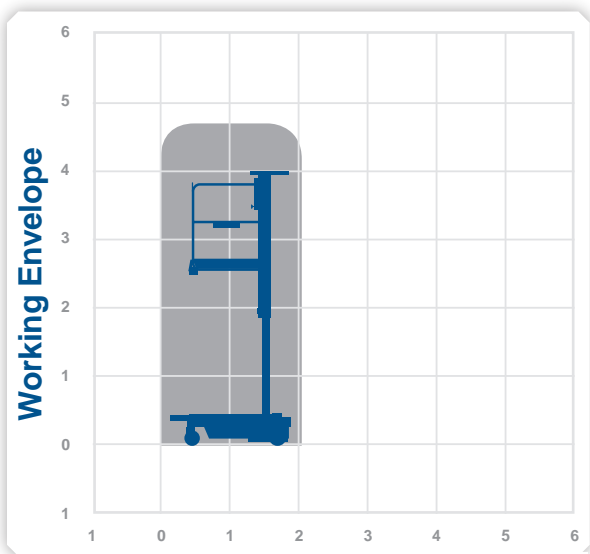

contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Working Height 4.2m

Closed Length	1.28m
Closed Height	1.95m
Closed Width	0.74m
Platform Size	0.85m x 0.64m
Max SWL	150kg
Weight	305kg


Alternative machines

Ecolift

Manufacturer

PowerTower

Indoor use only

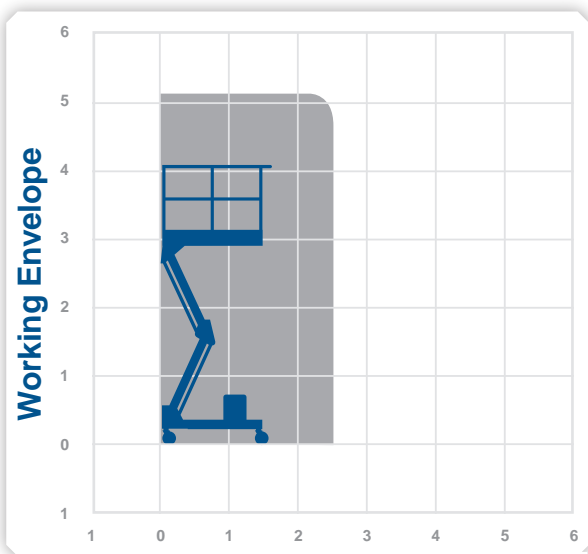

4.2m

Working Height 4.5m

Closed Length	1.195m
Closed Height	1.56m
Closed Width	0.75m
Platform Size	1.0m x 0.73m
Max SWL	200kg
Weight	285kg

Alternative machines
Nano SP
Nano SP+
Pecolift
Power Tower


Manufacturer
PowerTower

Indoor use only



4.5m

Working Envelope

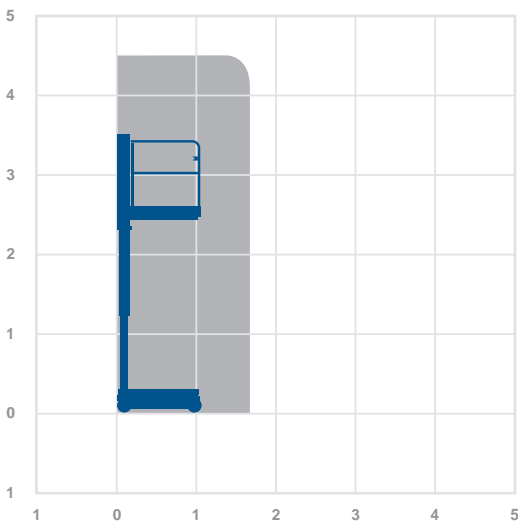

contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Working Height 4.5m


Closed Length	1.2m
Closed Height	1.59m
Closed Width	0.75m
Platform Size	1.0m x 0.73m
Platform Length – deck extended	1.5m
Max SWL	200kg
Weight	506kg

Alternative machines

NANO
NANO SP+
Pecolift
Power Tower

Manufacturer

PowerTower

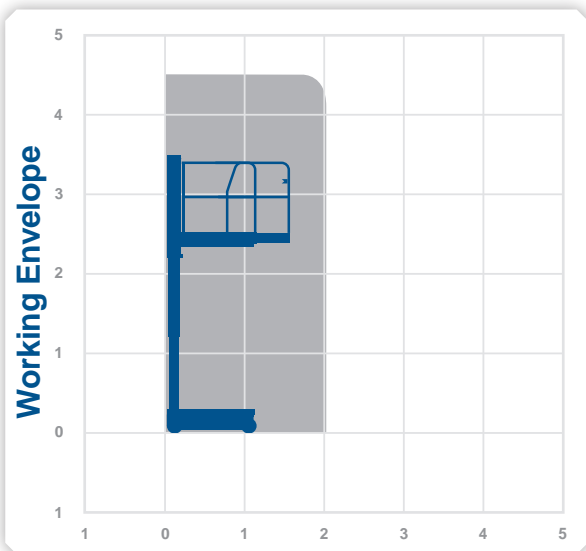

Working Height 4.5m

Closed Length	1.2m
Closed Height	1.59m
Closed Width	0.75m
Platform Size	1.0m x 0.73m
Platform Length – deck extended	2.0m
Max SWL	200kg
Weight	540kg

Alternative machines

NANO
NANO SP


Manufacturer

PowerTower



4.5m

Working Envelope

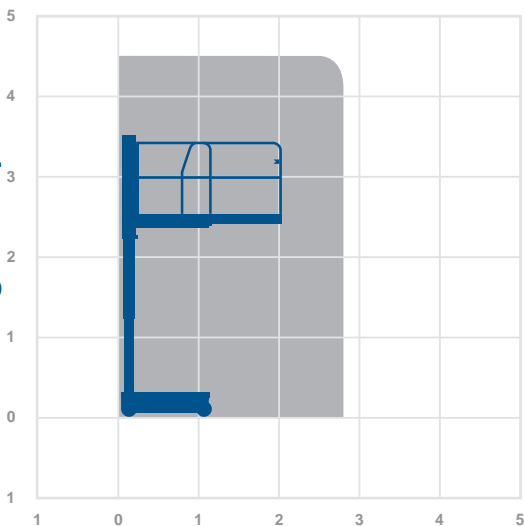

contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Working Height 5.1m

Closed Length	1.6m
Closed Height	1.92m
Closed Width	0.78m
Platform Size	1.52m x 0.65m
Max SWL	250kg
Weight	342kg


Alternative machines

NANO
NANO SP
NANO SP+
Pecolift

Manufacturer

PowerTower

Indoor use only

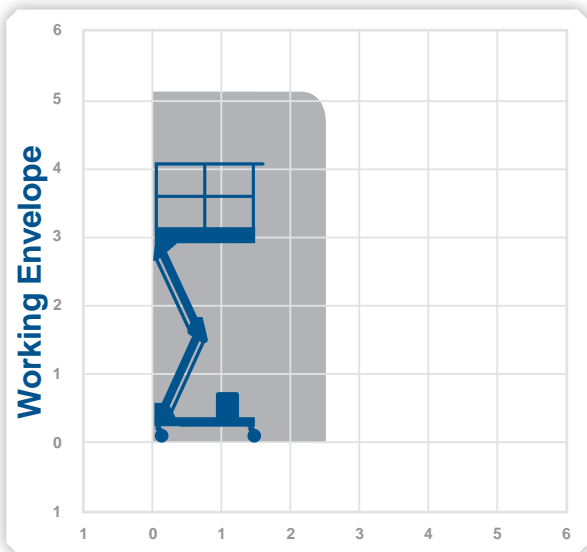

5.1m

Working Height 5.58m

Closed Length	1.35m
Closed Height	1.79m
Closed Width	0.76m
Platform Size	0.89m x 0.75m
Platform Length - deck extended	1.35m
Max SWL	227kg
Weight	862kg

Alternative machines

NANO SP
GR15

Manufacturer


Genie

Indoor use only



5.58m

Working Envelope

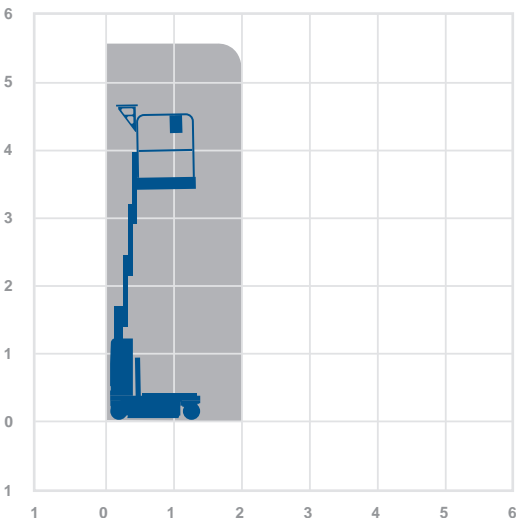

contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Working Height 6.62m

Closed Length	1.45m
Closed Height	1.79m
Closed Width	0.76m
Platform Size	0.94m x 0.75m
Platform Length – deck extended	1.4m
Max SWL	227kg
Weight	1141kg


Alternative
machines

NANO SP

Manufacturer

Genie

Indoor use only

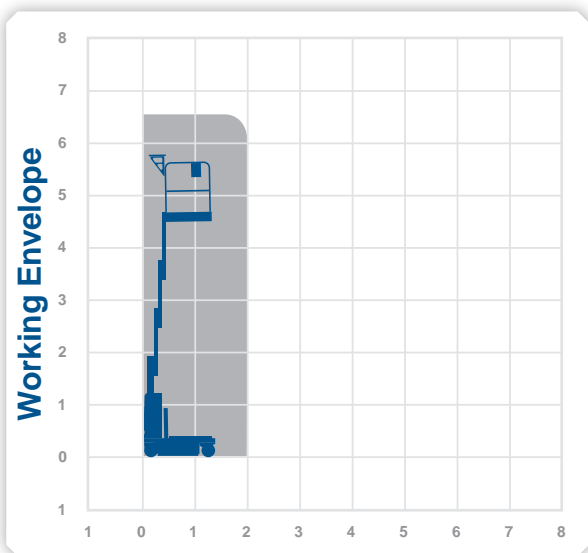



contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Scissor Lifts



Contact our hire team for expert advice and assistance

contact@rapidaccess-gulf.com

rapidaccess-gulf.com

Scissor Lifts

- Working heights from 8m to 18m
- Lightweight and compact machines
- Direct drive electric machines for greater efficiency
- Double deck and rough terrain
- Variety of power options
- Narrow aisle machines for access to confined areas
- Non-marking tyre option for work on finished floors
- Models with 680kg SWL
- Lightweight models from 1,312kg
- Power to platform available

For more information please call your local depot (refer to page 5) or visit rapidaccess-gulf.com



Working Height 7.8m

Closed Length	1.78m
Closed Height	2.11m
Stowed Height (guardrails lowered)	1.64m
Closed Width	0.81m
Platform Size	1.63m x 0.71m
Platform Length (deck extended)	2.53m
Max SWL	227kg
Weight	1312kg

Alternative machines


GS1932
GS2032

Manufacturer

Skyjack



Working Envelope

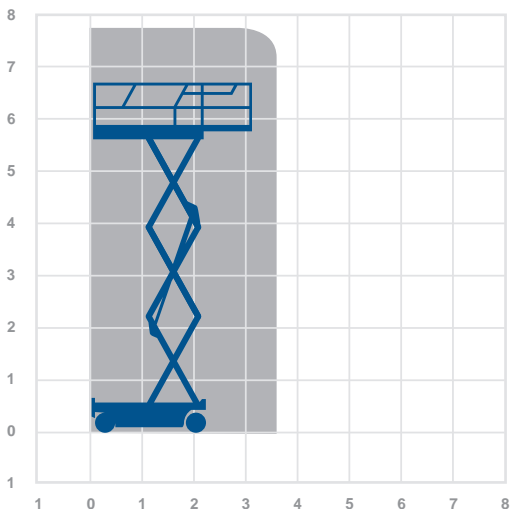

7.8m

Working Height 7.8m

Closed Length	1.9m
Closed Height	1.98m
Stowed Height (guardrails lowered)	1.98m
Closed Width	0.79m
Platform Size	0.74m x 1.72m
Platform Length (deck extended)	2.59m
Max SWL	230kg
Weight	1520kg

Alternative machines

3220
GS1932
GS20

Compact 8


Manufacturer

Haulotte



7.77m

Working Envelope

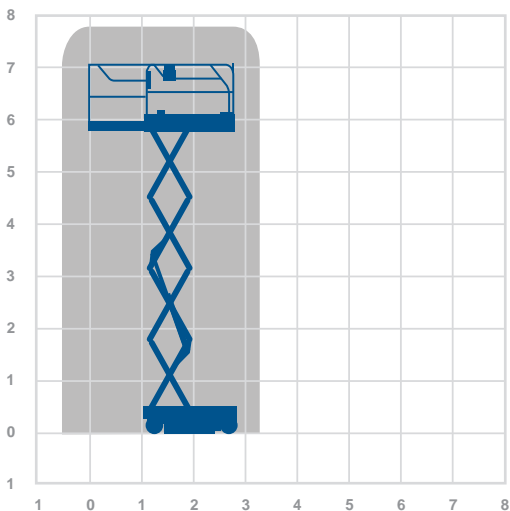

contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Working Height 7.8m


Closed Length	1.82m
Closed Height	2.11m
Stowed Height (guardrails lowered)	1.76m
Closed Width	0.81m
Platform Size	1.64m x 0.74m
Platform Length (deck extended)	2.54m
Max SWL	227kg
Weight	1503kg

Alternative machines

3219
GS19
GS20

Manufacturer

Genie

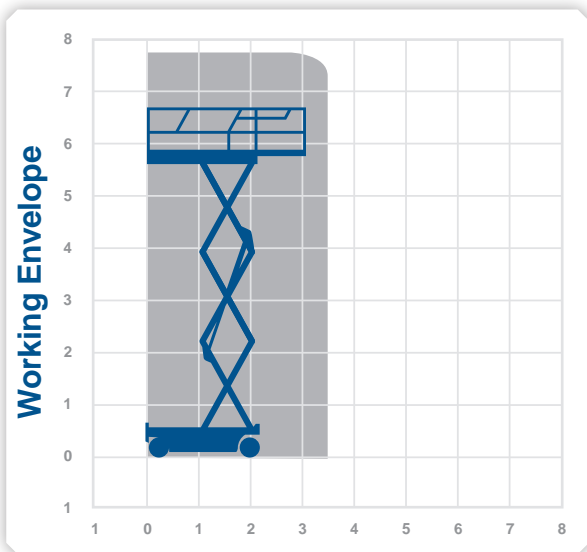


7.8m

Working Height 7.92m

Closed Length	2.45m
Closed Height	2.1m
Stowed Height (guardrails lowered)	1.75m
Closed Width	0.81m
Platform Size	2.21m x 0.7m
Platform Length (deck extended)	3.2m
Max SWL	363kg
Weight	1559kg

Manufacturer
Genie

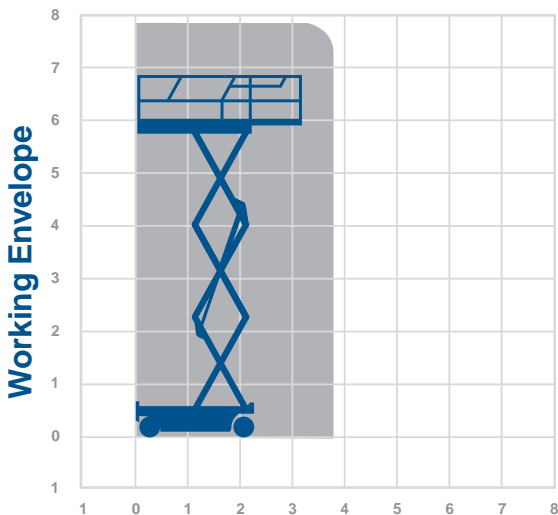

contact@rapidaccess-gulf.com
rapidaccess-gulf.com



 **Rapid Access**

3220

scissors

Working Height 8.1m

Closed Length	2.32m
Closed Height	2.08m
Stowed Height (guardrails lowered)	1.73m
Closed Width	0.81m
Platform Size	2.13m x 0.71m
Platform Length (deck extended)	3.04m
Max SWL	408kg
Weight	1594kg

Alternative machines

GS20


Manufacturer

Skyjack



8.1m

Working Envelope

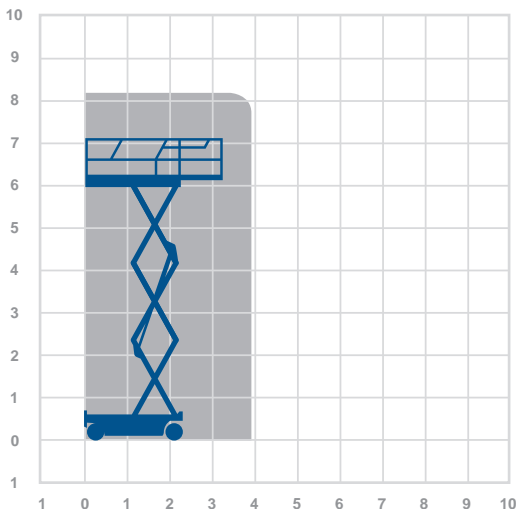

contact@rapidaccess-gulf.com

rapidaccess-gulf.com

Working Height 8.1m

Closed Length	2.44m
Closed Height	1.75m
Stowed Height (guardrails lowered)	1.03m
Closed Width	0.81m
Platform Size	2.26m x 0.81m
Platform Length (deck extended)	0.91m
Max SWL	363kg
Weight	1621kg


Manufacturer
Genie



Explosion resistant



Working Envelope

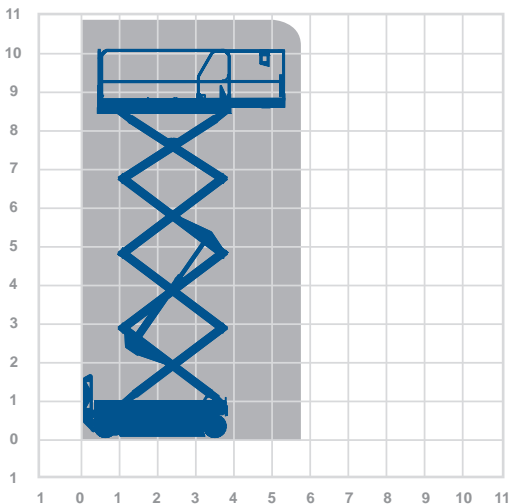

8.1m

Compact 8

scissors


Working Height 8.2m

Closed Length	2.49m
Closed Height	2m
Stowed Height (guardrails lowered)	1.13m
Closed Width	0.81m
Platform Size	0.81m x 2.31m
Platform Length (deck extended)	3.23m
Max SWL	350kg
Weight	1655kg

Manufacturer
Haulotte



Working Envelope

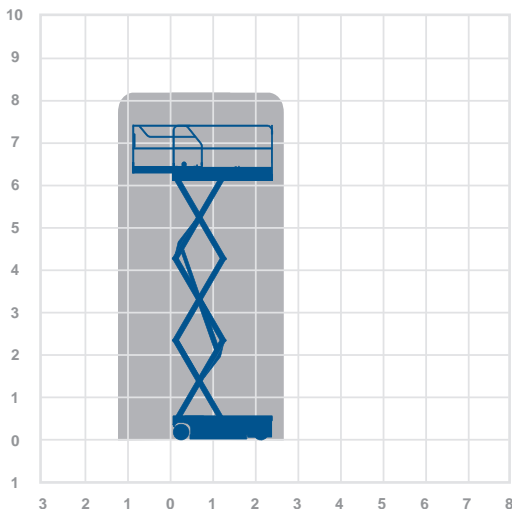

contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Working Height 9.92m


Closed Length	2.45m
Closed Height	2.17m
Stowed Height (guardrails lowered)	1.99m
Closed Width	1.17m
Platform Size	2.21m x 0.94m
Platform Length (deck extended)	3.2m
Max SWL	454kg
Weight	2107kg

Alternative machines

4626
GS20
2646ES

Manufacturer

Genie

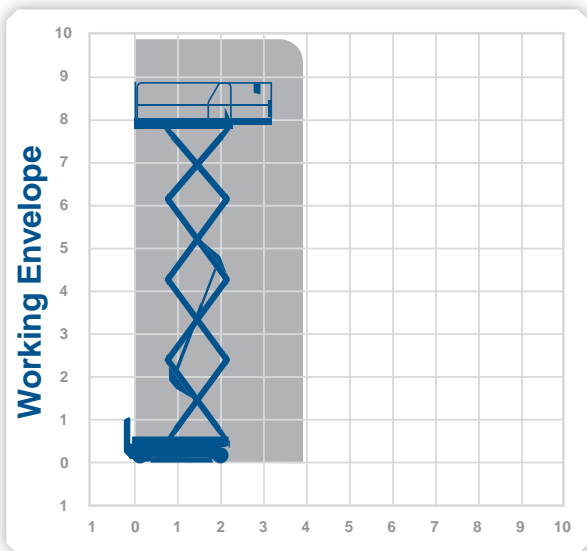

9.92m

Working Height 9.9m


Closed Length	2.31m
Closed Height	2.15m
Stowed Height (guardrails lowered)	1.79m
Closed Width	1.17m
Platform Size	2.11m x 1.07m
Platform Length (deck extended)	3.01m
Max SWL	454kg
Weight	2130kg

Alternative machines

GS2646E

Manufacturer

Skyjack

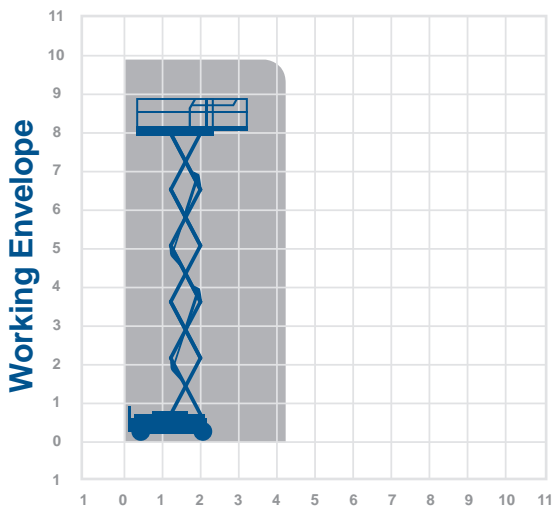

contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Working Height 9.92m

Closed Length	2.67m
Closed Height	2.40m
Stowed Height (guardrails lowered)	2.40m
Closed Width	1.42m
Platform Size	2.34m x 1.42m
Platform Length (deck extended)	1.52m
Max SWL	408kg
Weight	2370kg

Alternative
machines


EX2030

Manufacturer

Genie

Explosion
resistant

Working Envelope

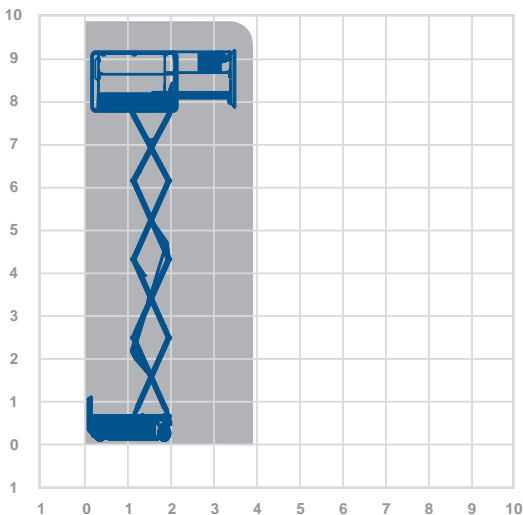

9.92m

Working Height 9.92m

Closed Length	2.32m
Closed Height	2.15m
Stowed Height (guardrails lowered)	1.91m
Closed Width	0.81m
Platform Size	2.13m x 0.71m
Platform Length (deck extended)	3.23m
Max SWL	227kg
Weight	1890kg

Alternative machines

GS2632


Manufacturer

Skyjack

Indoor use only



9.92m

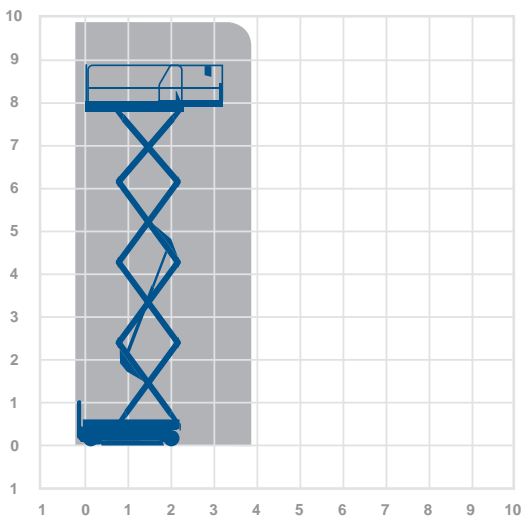Working Envelope

contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Working Height 9.92m

Closed Length	2.44m
Closed Height	2.26m
Stowed Height (guardrails lowered)	1.91m
Closed Width	0.81m
Platform Size	2.26m x 0.79m
Platform Length (deck extended)	3.18m
Max SWL	227kg
Weight	1956kg


Alternative machines

3226

Manufacturer

Genie

Indoor use only

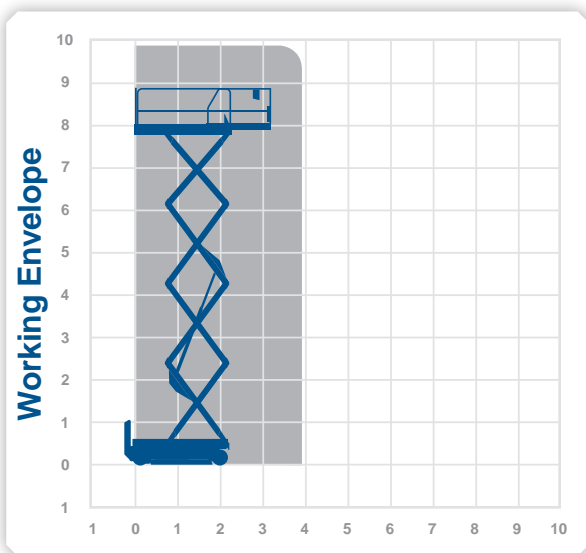

9.92m

Compact 10N

scissors

Working Height 10m


Closed Length	2.49m
Closed Height	2.18m
Stowed Height (guardrails lowered)	1.32m
Closed Width	0.81m
Platform Size	0.81m x 2.31m
Platform Length (deck extended)	3.23m
Max SWL	230kg
Weight	2190kg

Manufacturer
Haulotte



10.0m

Working Envelope

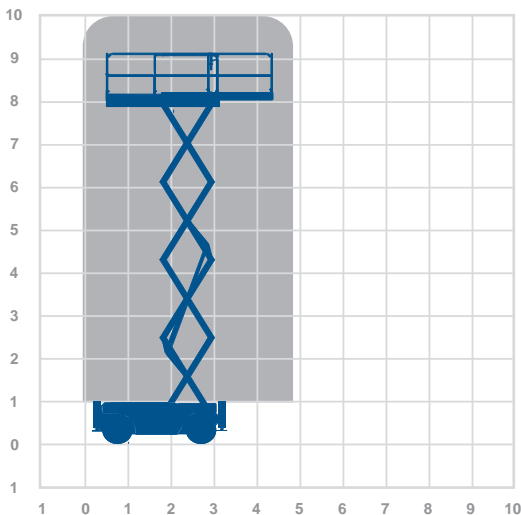


contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Working Height 10.28m

Closed Length	3.17m
Closed Height	2.44m
Stowed Height (guardrails lowered)	1.59m
Closed Width	1.78m
Platform Size	2.45m x 1.45m
Platform Length (deck extended)	3.7m
Max SWL	565kg
Weight	3520kg

Manufacturer
Haulotte

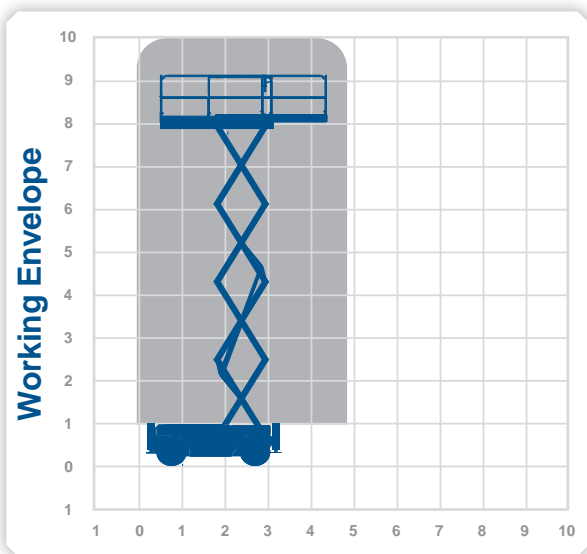




contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Working Height 11.75m

Closed Length	2.43m
Closed Height	2.3m
Stowed Height (guardrails lowered)	1.8m
Closed Width	1.17m
Platform Size	2.26m x 1.16m
Platform Length (deck extended)	3.25m
Max SWL	318kg
Weight	2796kg

Alternative machines4632
3246ES**Manufacturer**

Genie

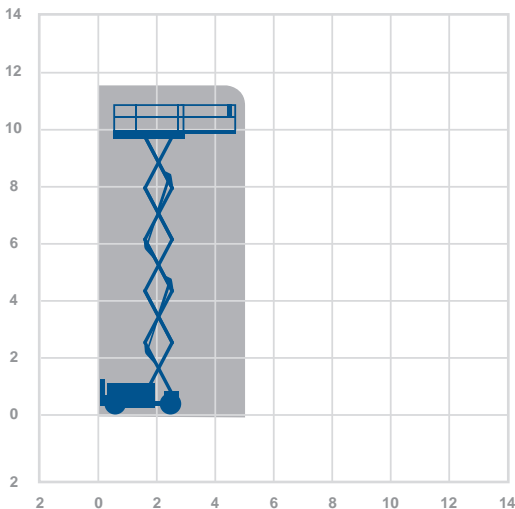**Working Envelope**

11.75m

Working Height 11.75m


Closed Length	3.12m
Closed Height	2.59m
Stowed Height (guardrails lowered)	1.92m
Closed Width	1.75m
Platform Size	2.79m x 1.6m
Platform Length (deck extended)	1.52m
Max SWL	454kg
Weight	3557kg

Manufacturer
Genie



11.75 m

Working Envelope

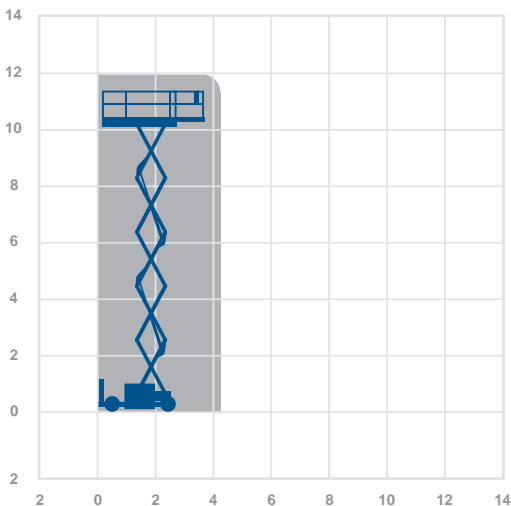

contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Working Height 11.8m


Closed Length	2.31m
Closed Height	2.24m
Stowed Height (guardrails lowered)	1.88m
Closed Width	1.17m
Platform Size	2.11m x 1.07m
Platform Length (deck extended)	3.01m
Max SWL	317kg
Weight	2300kg

Alternative machines

GS32

Manufacturer

Skyjack

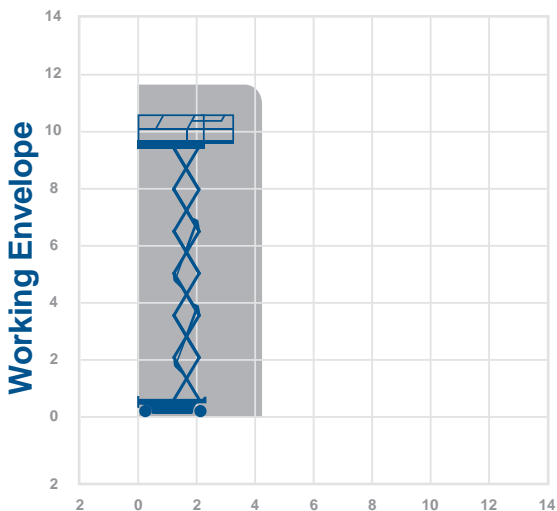

11.75m

Working Height 11.75m


Closed Length	2.67m
Closed Height	2.45m
Stowed Height (guardrails lowered)	1.83m
Closed Width	1.73m
Platform Size	2.51m x 1.55m
Platform Length (deck extended)	3.96m
Max SWL	454kg
Weight	4115kg

Manufacturer
Genie



11.75m

Working Envelope

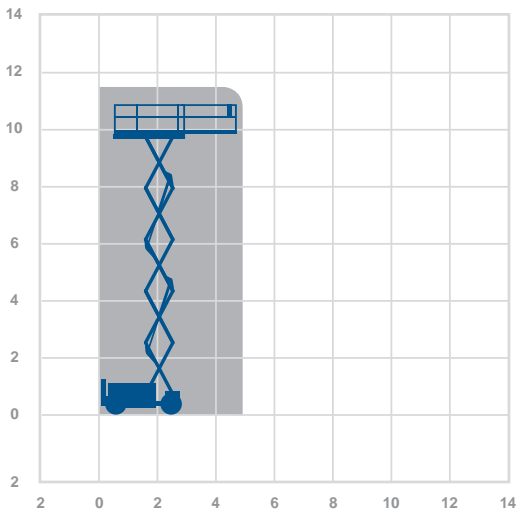


contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Working Height 11.96m

Closed Length	3.12m
Closed Height	2.59m
Stowed Height (guardrails lowered)	1.92m
Closed Width	1.75m
Platform Size	2.79m x 1.6m
Platform Length (deck extended)	4.5m
Max SWL	454kg
Weight	3949kg

Manufacturer
Genie

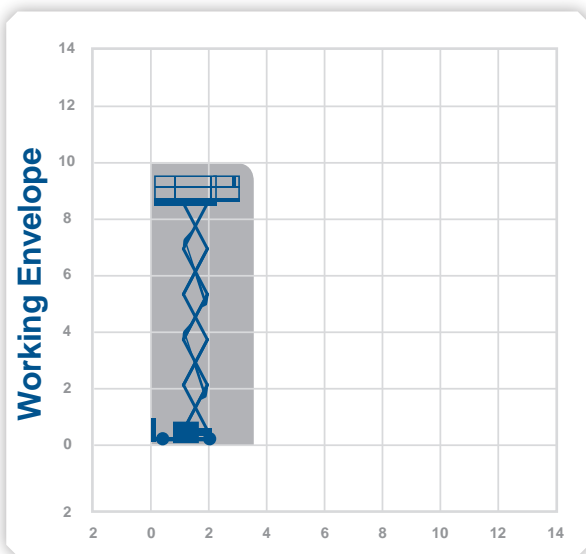

11.96m



contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Compact 12

scissors


Working Height 11.98m

Closed Length	2.49m
Closed Height	1.53m
Stowed Height (guardrails lowered)	2.39m
Closed Width	1.2m
Platform Size	1.2m x 2.31m
Platform Length (deck extended)	3.23m
Max SWL	300kg
Weight	2470kg

Manufacturer
Genie



Working Envelope

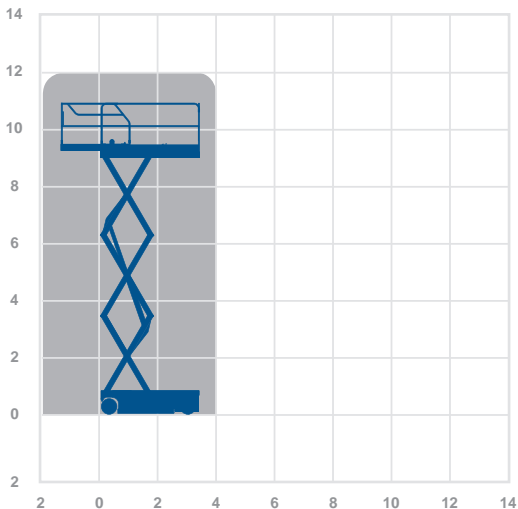

12m

Rapid Access

Compact 12SX

scissors

Working Height 12.0m


Closed Length	4.18m
Closed Height	1.71m
Stowed Height (guardrails lowered)	2.57m
Closed Width	2.25m
Platform Size	3.91m x 1.81m
Platform Length (deck extended)	4.91m
Max SWL	700kg
Weight	5510kg

Manufacturer
Haulotte



12.0m

Working Envelope

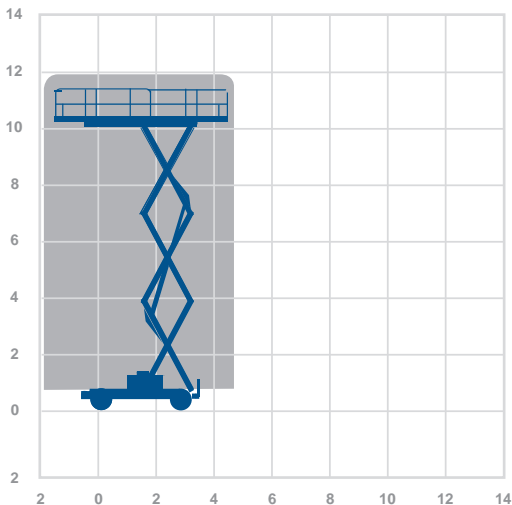

One day of powered access training, years of working safely at height. Contact us and get trained with Rapid Access contact@rapidaccess-gulf.com


Compact 12DX

scissors

Working Height 12.06m

Closed Length	3.17m
Closed Height	2.56m
Stowed Height (guardrails lowered)	1.7m
Closed Width	1.78m
Platform Size	2.45m x 1.45m
Platform Length (deck extended)	3.7m
Max SWL	450kg
Weight	4110kg

Manufacturer
Haulotte

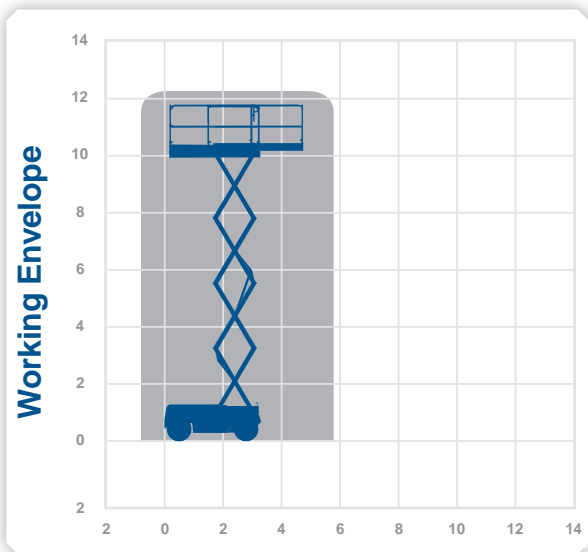

12.06m

 **Rapid Access**

3394RT

scissors

Working Height 12.06m


Closed Length	3.86m
Closed Height	1.57m
Stowed Height (guardrails lowered)	1.97m
Closed Width	2.39m
Platform Size	2.18m x 3.81m
Platform Length (deck extended)	3.86m
Max SWL	1020kg
Weight	5402kg

Manufacturer
JLG



12.06m

Working Envelope

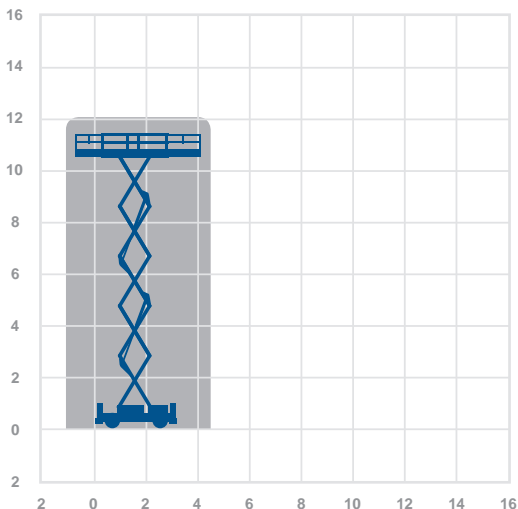

contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Working Height 13.11m


Closed Length	3.86m
Closed Height	1.79m
Stowed Height (guardrails lowered)	1.10m
Closed Width	2.39m
Platform Size	3.81m x 2.18m
Platform Length (deck extended)	4.03m
Max SWL	680kg
Weight	7150kg

Alternative machines

GS4390

Manufacturer

JLG

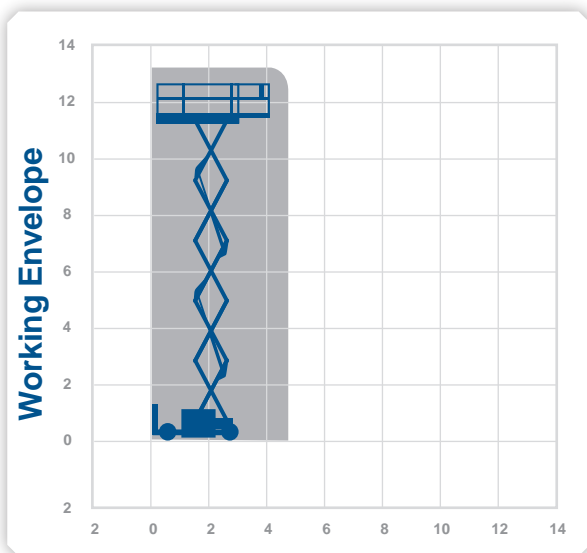

13.11m

COMPACT 14

scissors

Working Height 13.85m


Closed Length	2.49m
Closed Height	2.08m
Stowed Height (guardrails lowered)	2.5m
Closed Width	1.2m
Platform Size	2.31m x 1.2m
Platform Length (deck extended)	3.23m
Max SWL	350kg
Weight	3175kg

Manufacturer
Haulotte



13.85m

Working Envelope

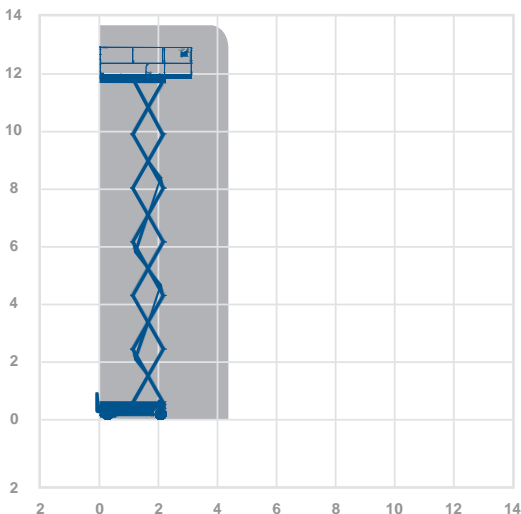


contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Working Height 13.89m

Closed Length	2.44m
Closed Height	2.54m
Stowed Height (guardrails lowered)	1.88m
Closed Width	1.19m
Platform Size	2.26m x 1.15m
Platform Length (deck extended)	3.36m
Max SWL	350kg
Weight	3221kg

Manufacturer
Genie

Indoor use only

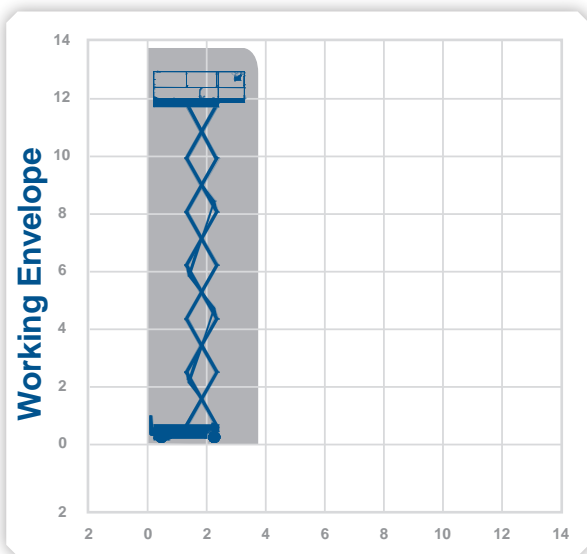

13.89m

Working Height 14.2m


Closed Length	3.1m
Closed Height	2.83m
Stowed Height (guardrails lowered)	2.01m
Closed Width	1.75m
Platform Size	2.92m x 1.65m
Platform Length (deck extended)	3.83m
Max SWL	360kg
Weight	5300kg

Manufacturer
JLG



14.2m

Working Envelope

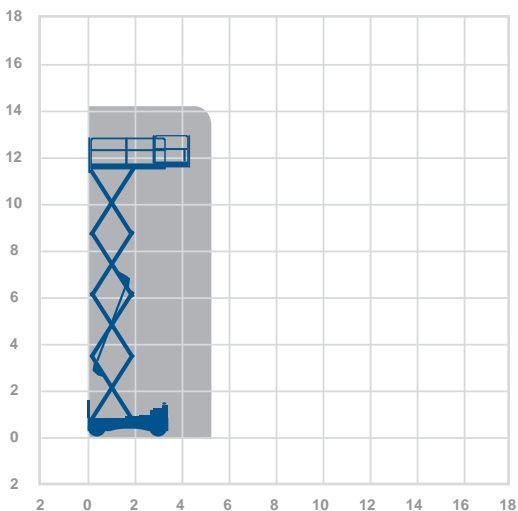

contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Compact 15SX

scissors


Working Height 15.0m

Closed Length	4.18m
Closed Height	2.11m
Stowed Height (guardrails lowered)	2.77m
Closed Width	2.25m
Platform Size	3.91m x 1.81m
Platform Length (deck extended)	4.91m
Max SWL	500kg
Weight	6340kg

Manufacturer
Haulotte



Working Envelope

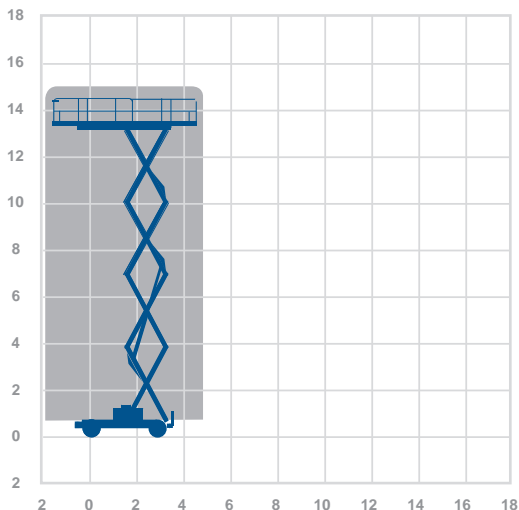

15.0m

 **Rapid Access**

Working Height 15.1m

Closed Length	4.88m
Closed Height	2.93m
Stowed Height (guardrails lowered)	2.25m
Closed Width	2.29m
Platform Size	4.81m x 1.83m
Platform Length (deck extended)	7.38m
Max SWL	680kg
Weight	7323kg

Alternative machines

GS53


Manufacturer

Genie



15.1m

Working Envelope

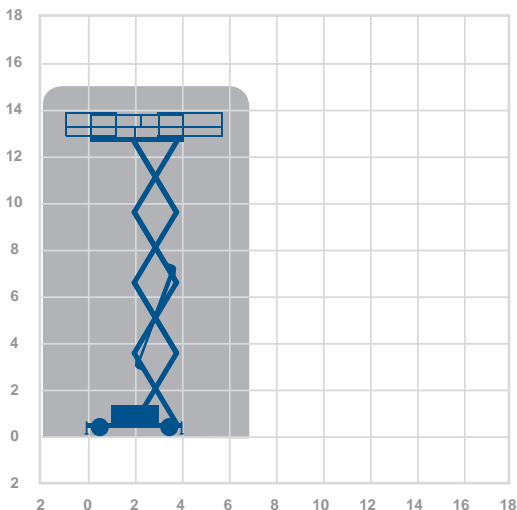

contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Compact 18SX

scissors


Working Height 18.0m

Closed Length	4.18m
Closed Height	2.11m
Stowed Height (guardrails lowered)	2.96m
Closed Width	2.25m
Platform Size	3.91m x 1.81m
Platform Length (deck extended)	4.91m
Max SWL	500kg
Weight	7300kg

Manufacturer
Haulotte



Working Envelope

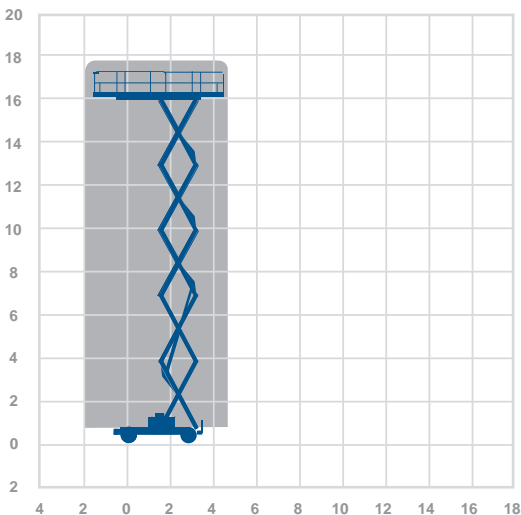

18.0m

 **Rapid Access**

Working Height 18.15m

Closed Length	4.88m
Closed Height	3.15m
Stowed Height (guardrails lowered)	2.47m
Closed Width	2.29m
Platform Size	4.81m x 1.83m
Platform Length (deck extended)	7.38m
Max SWL	680kg
Weight	8050kg

Alternative machines

GS4390


Manufacturer

Genie



18.15m

Working Envelope

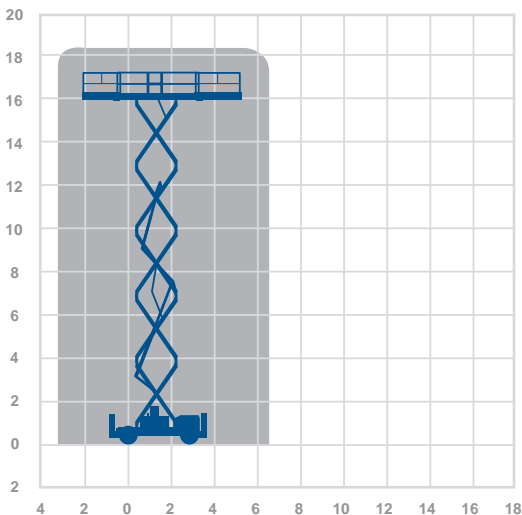

contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Boom Lifts



Contact our hire team for expert advice and assistance

contact@rapidaccess-gulf.com

rapidaccess-gulf.com

Boom Lifts

- Working heights from 10m to 56m
- Variety of power options
- Narrow aisle machines
- Telescopic or articulating action
- Rough terrain tyre option
- Non-marking tyres for use on finished floors


For more information please call your local depot (refer to page 5) or visit rapidaccess-gulf.com



Working Height 10.89m
Horizontal Outreach 6.25m

Manufacturer
Genie

Closed Length 5.31m
Closed Height 2.0m
Closed Width 1.2m
Platform Size 1.17m x 0.76m
Rotation 355°
Max SWL 227kg
Weight 6450kg

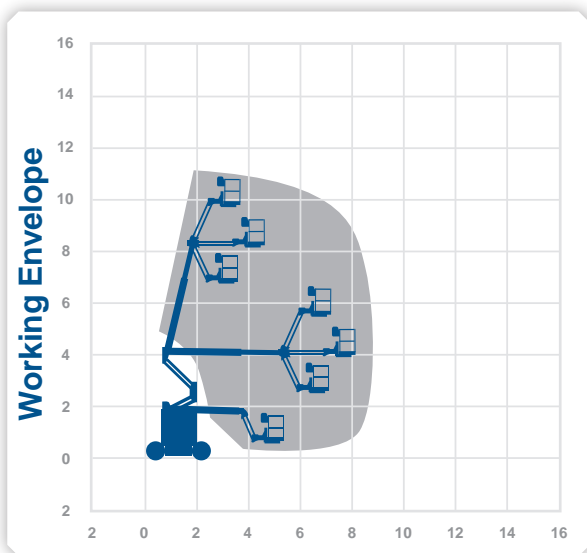

6.25m 10.89m

 **Rapid Access**

Working Height 10.89m

Horizontal Outreach 6.4m

Closed Length	5.2m
Closed Height	2.0m
Closed Width	1.2m
Platform Size	1.17m x 0.76m
Rotation	355°
Max SWL	227kg
Weight	6577kg

Alternative machines


HR12NB
Z30NRJ

Manufacturer

Genie



Working Envelope

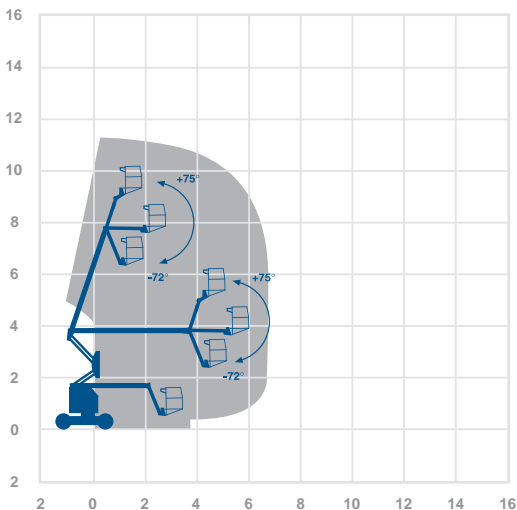


6.4m 11.0m

contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Working Height 11.68m
Horizontal Outreach 7.22m

Manufacturer
 Haulotte

Closed Length	5.64m
Closed Height	1.99m
Closed Width	1.2m
Platform Size	1.14m x 0.8m
Rotation	355°
Max SWL	230kg
Weight	5620kg
Reach Below Ground	n/a

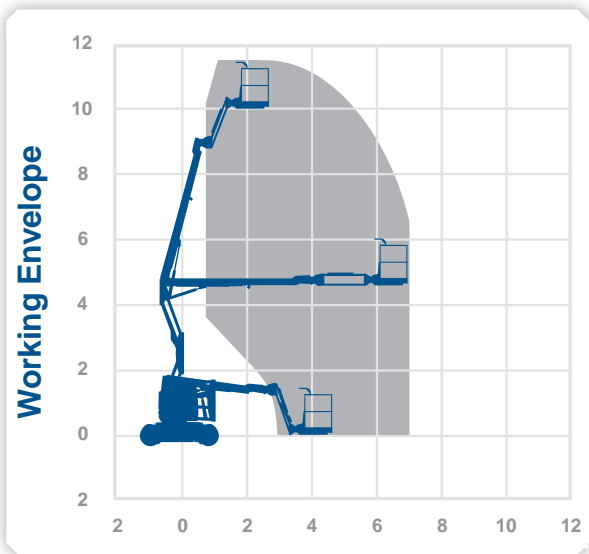

11.68m
 6.94m



Working Height 12.2m Horizontal Outreach 6.1m

Closed Length	4.1m
Closed Height	1.9m
Closed Width	1.5m
Platform Size	1.10m x 0.65m
Rotation	360°
Max SWL	200kg
Weight	3060kg


Alternative machines

G30N
HR15NB

Manufacturer

Niftylift

fitted with
manufacturers
secondary guarding
as standard

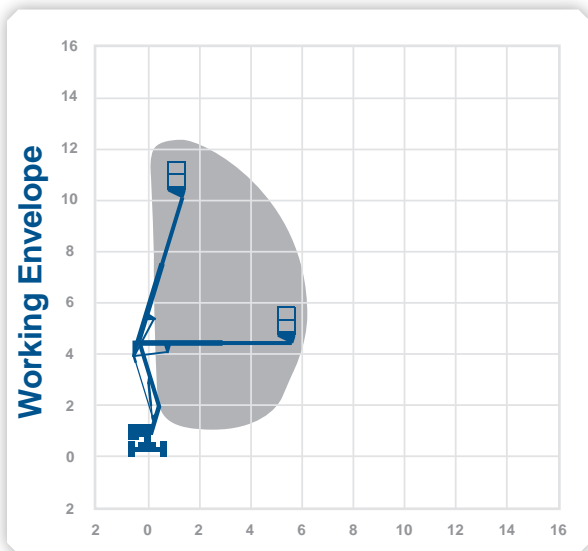


contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Working Height 12.4m
Horizontal Outreach 6.6m

Closed Length	5.5m
Closed Height	2.2m
Closed Width	1.9m
Platform Size	1.5m x 0.8m
Rotation	350°
Max SWL	230kg
Weight	5620kg
Reach Below Ground	n/a

Manufacturer

Haulotte

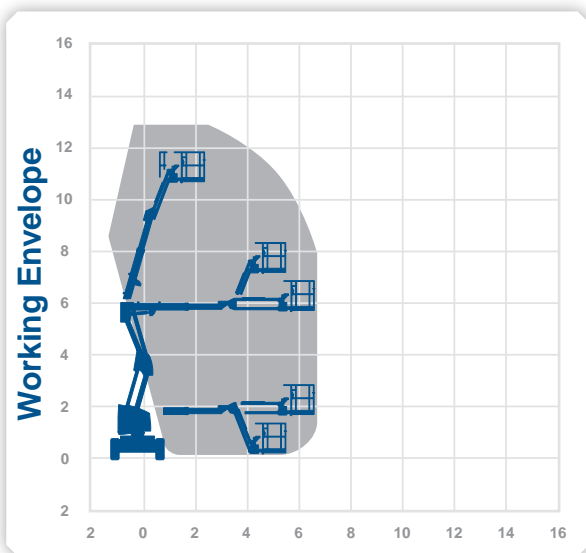

12.4m
6.6m

 **Rapid Access**

Working Height 12.62m Horizontal Outreach 6.78m

Closed Length	5.64m
Closed Height	2.0m
Closed Width	1.73m
Platform Size	1.42m x 0.76m
Rotation	355°
Max SWL	227g
Weight	5443kg

Alternative machines


HR12NB
HR15NB

Manufacturer

Genie



Working Envelope

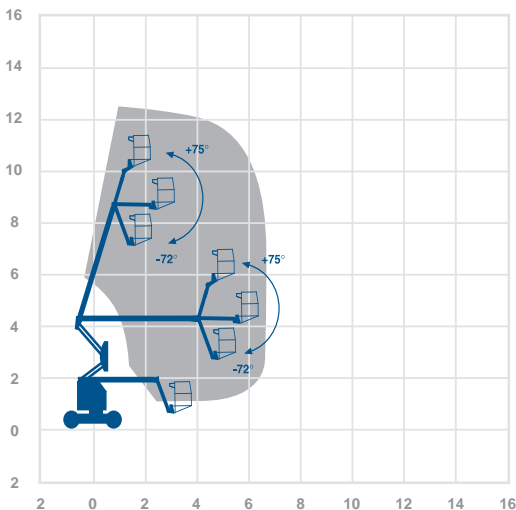

12.62m
6.78m

contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Working Height 15.4m Horizontal Outreach 9.6m

Closed Length	5.0m
Closed Height	2.1m
Closed Width	1.5m
Platform Size	1.5m x 0.7m
Rotation	360°
Max SWL	225kg
Weight	6680kg


Alternative machines

Z34/22BE
HR12NB

Manufacturer

Niftylift

fitted with
manufacturers
secondary guarding
as standard

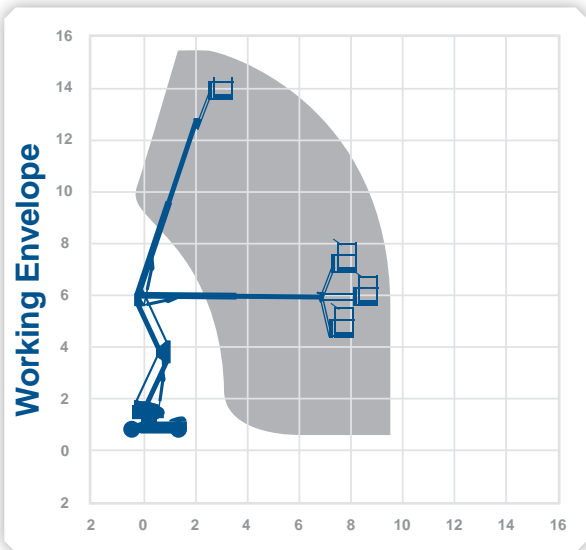

9.6m
15.4m

Working with materials at height?
Browse through our video gallery to
know more about our award winning
safety innovations.
www.rapidaccess-gulf.com



Working Height 15.72m

Horizontal Outreach 7.24m


Closed Length	6.5m
Closed Height	2.01m
Closed Width	1.75m
Platform Size	1.52m x 0.76m
Rotation	360°
Max SWL	230kg
Weight	6700kg

Alternative machines

45JX
Z45DX
Z45DJX
Z45B

Manufacturer

JLG

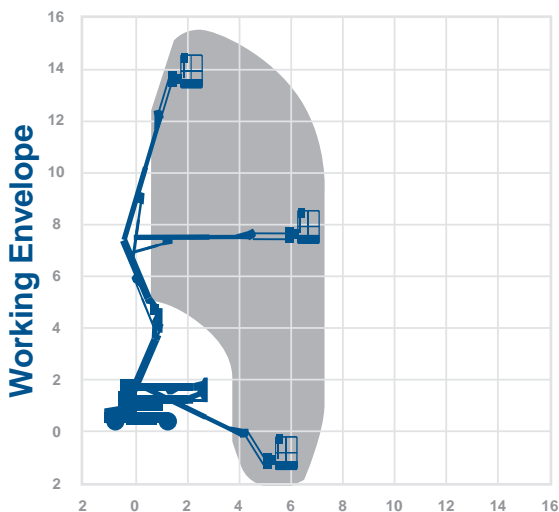

contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Working Height 15.72m
Horizontal Outreach 7.24m


Closed Length	6.5m
Closed Height	2.01m
Closed Width	1.75m
Platform Size	1.52m x 0.76m
Rotation	360°
Max SWL	230kg
Weight	6532kg

Alternative machines

HR15NB

Manufacturer

JLG

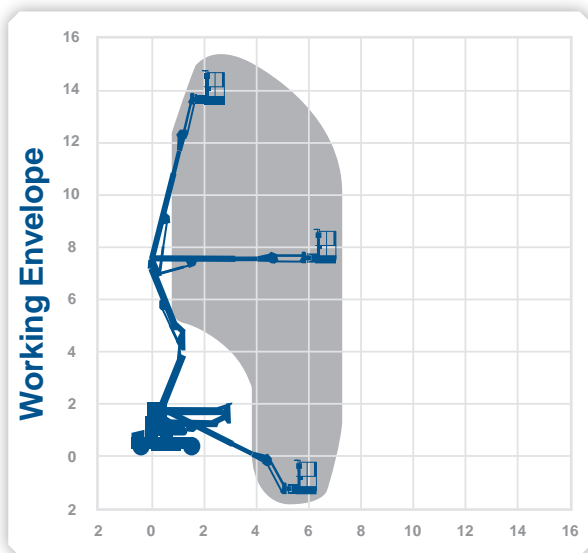

 **Rapid Access**



contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Working Height 15.72m
Horizontal Outreach 11.18m
Outreach


Closed Length	8.48m
Closed Height	2.49m
Closed Width	2.3m
Platform Size	1.83m x 0.76m
Rotation	Continuous
Max SWL	227kg
Weight	6709kg
Reach Below Ground	1.5m

Alternative machines

Z45DX
 Z45DJX

Manufacturer

Genie

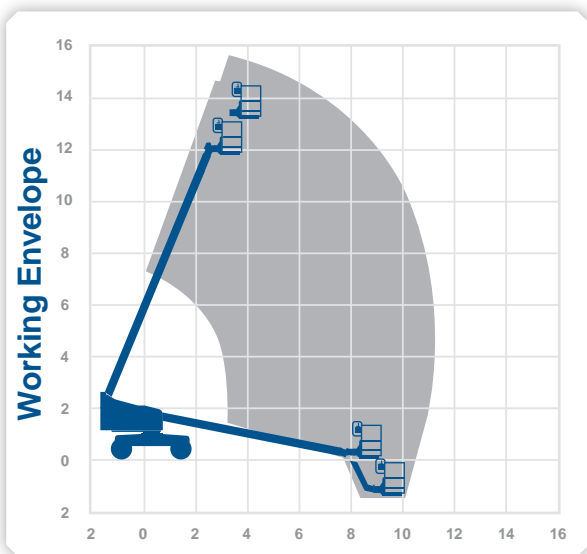

15.72m
 7.47m



Working Height 15.86m Horizontal Outreach 7.55m


Closed Length	6.66m
Closed Height	2.25m
Closed Width	2.29m
Platform Size	0.76m x 1.83m
Rotation	355°
Max SWL	454kg
Weight	6984kg

Alternative machines

Z45DX
450AJ

Manufacturer

Genie

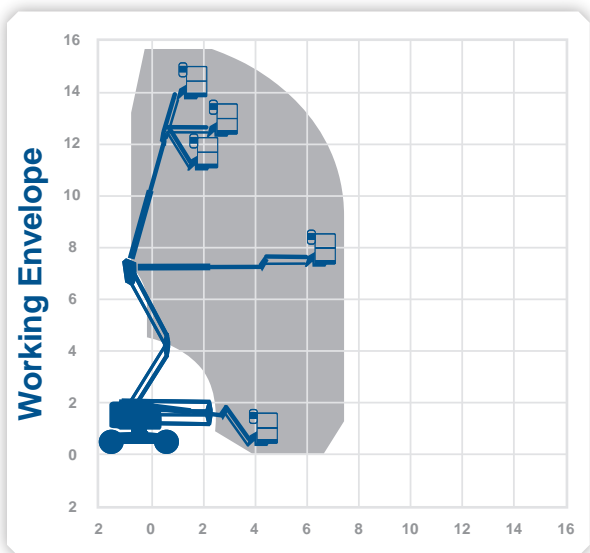

contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Working Height 15.9m
Horizontal Outreach 7.62m


Closed Length 5.56m
 Closed Height 2.11m
 Closed Width 2.29m
 Platform Size 1.83m x 0.76m
 Rotation 355°
 Max SWL 227kg
 Weight 6280kg (Air)
 6830kg (Foam Filled)

Alternative machines

G45DX
 Z45DJX
 450AJ

Manufacturer

Genie

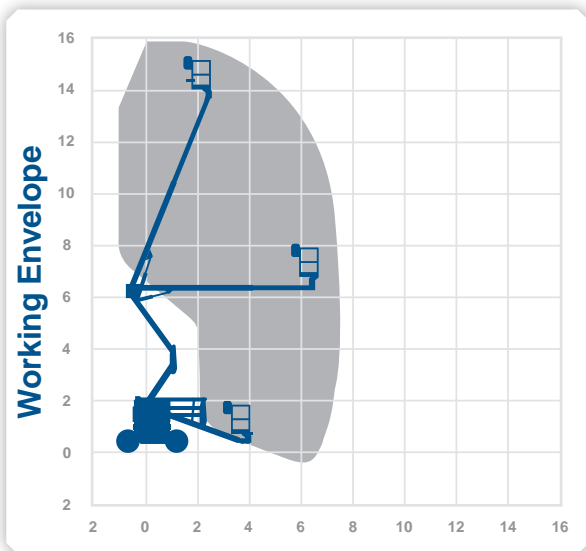

15.9m
 7.62m



Working Height 15.94m Horizontal Outreach 7.65m


Closed Length	6.83m
Closed Height	2.0m
Closed Width	1.79m
Platform Size	1.83m x 0.76m
Rotation	355°
Max SWL	227kg
Weight	7620kg

Alternative machines

Z45EJ
Z45DJX
450AJ

Manufacturer

Genie

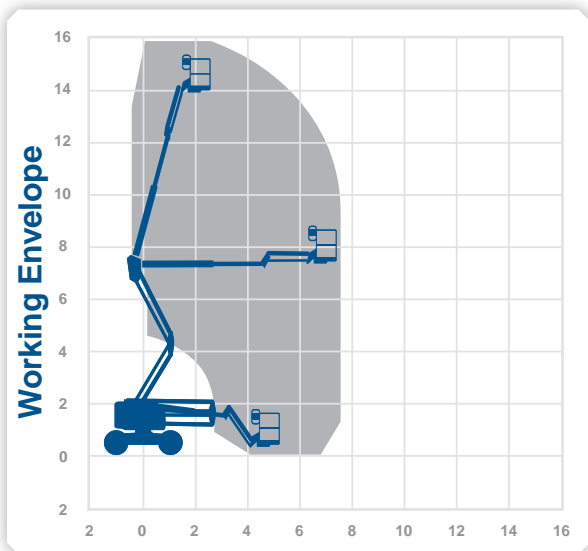

contact@rapidaccess-gulf.com
rapidaccess-gulf.com


Working Height 15.92m
Horizontal Outreach 7.65m

Closed Length 6.7m
 Closed Height 2.0m
 Closed Width 1.79m
 Platform Size 1.83m x 0.76m
 Rotation 355°
 Max SWL 227kg
 Weight 7620kg

Alternative machines

Z45BJ
 Z45DX
 Z454DXJ
 450AJ

Manufacturer
 Genie

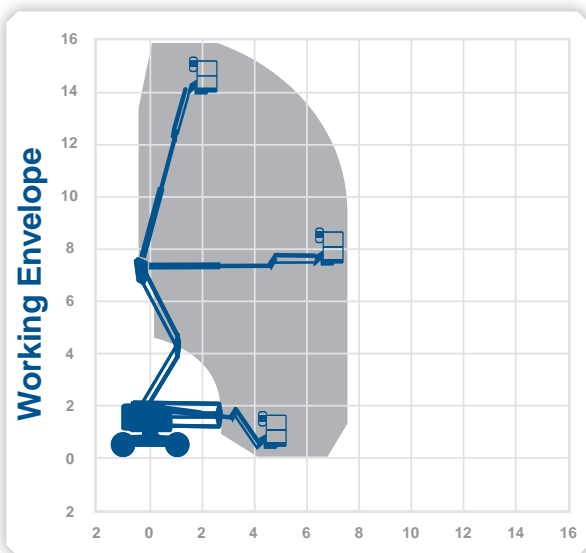

Rapid Access

Working Height 15.94m
Horizontal Outreach 7.52m


Closed Length	6.65m
Closed Height	2.13m
Closed Width	2.29m
Platform Size	1.83m x 0.76m
Rotation	355°
Max SWL	227kg
Weight	6123kg

Manufacturer

Genie



Working Envelope

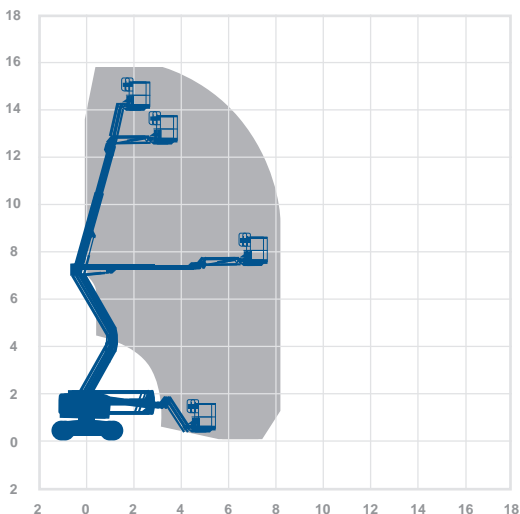

contact@rapidaccess-gulf.com
rapidaccess-gulf.com



 **Rapid Access**

Working Height 16.0m Horizontal Outreach 7.6m


Closed Length	6.78m
Closed Height	2.08m
Closed Width	2.23m
Platform Size	1.82m x 0.76m
Rotation	359°
Max SWL	227kg
Weight	6542kg (Air) 6892kg (Foam Filled)

Alternative machines

Z45D
Z45D-R
Z4525DJX

Manufacturer

Genie

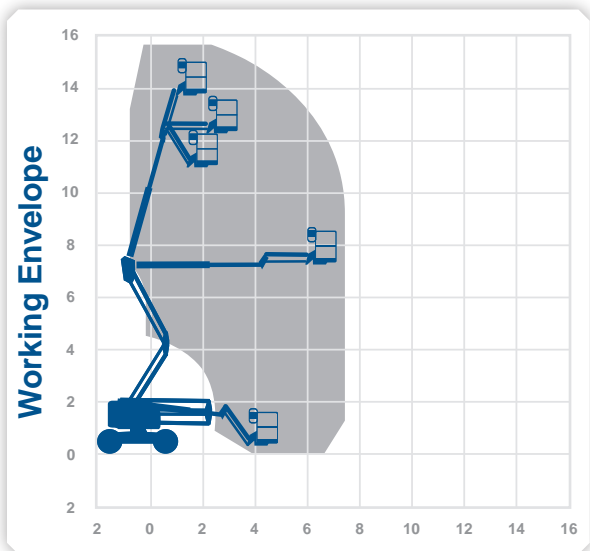

contact@rapidaccess-gulf.com
rapidaccess-gulf.com


Working Height 16.0m

Horizontal Outreach 8.3m

Closed Length	6.75m
Closed Height	2.3m
Closed Width	2.3m
Platform Size	1.83m x 0.8m
Rotation	355°
Max SWL	230g
Weight	6600kg

Manufacturer

Haulotte

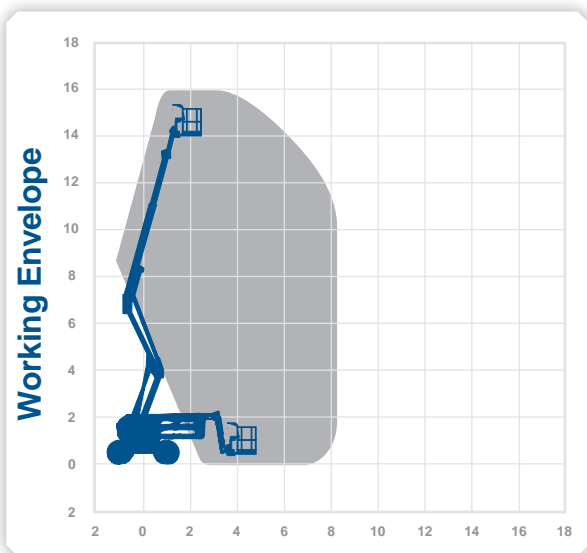

 **Rapid Access**

Working Height 17.62m
Horizontal Outreach 9.37m

Closed Length	7.58m
Closed Height	2.13m
Closed Width	2.29m
Platform Size	1.83m x 0.76m
Rotation	355°
Max SWL	227kg
Weight	7394kg


Manufacturer

Genie



9.37m
17.62m

Working Envelope

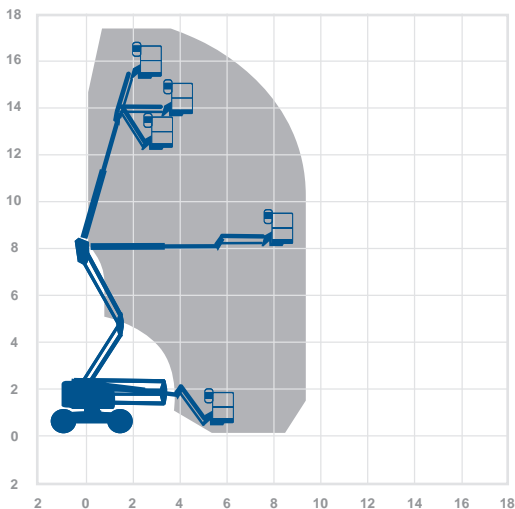


contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Working Height 20.16m
Horizontal Outreach 11.15m

Manufacturer

Genie

Closed Length 6.3m
Closed Height 2.62m
Closed Width 2.49m
Platform Size 1.83m x 0.76m
Rotation 355°
Max SWL 227kg
Weight 7756kg

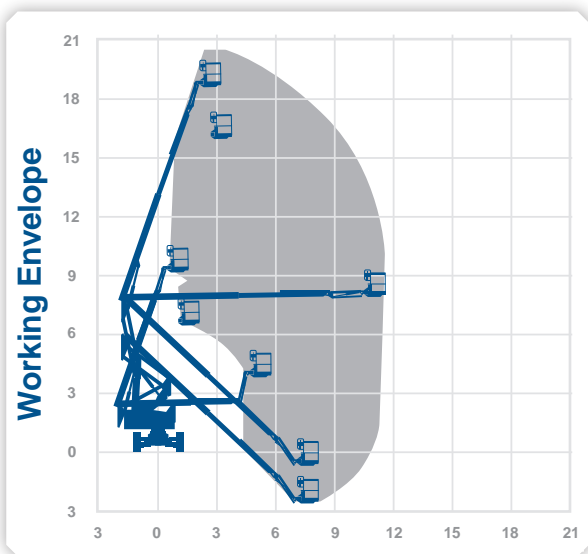

Rapid Access

Working Height 20.26m
Horizontal Outreach 12.2m

Closed Length 8.8m
Closed Height 2.51m
Closed Width 2.42m
Platform Size 1.83m x 0.8m
Rotation 360°
Max SWL 230kg
Weight 9600kg


Manufacturer

Haulotte



20.26m
12.2m

Working Envelope

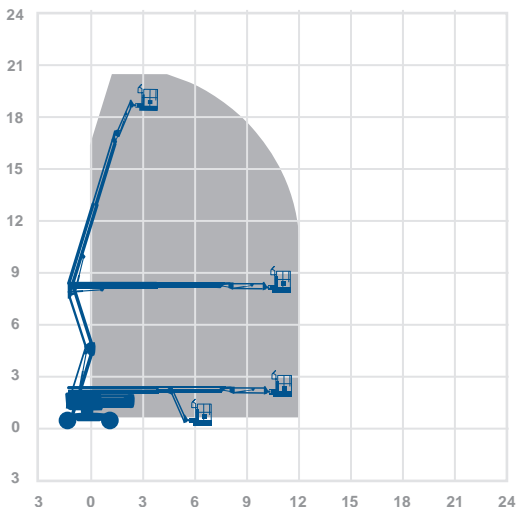

contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Working Height 20.29m
Horizontal Outreach 12.12m

Closed Length 8.82m
 Closed Height 2.56m
 Closed Width 2.44m
 Platform Size 1.83m x 0.91m
 Rotation 180°
 Max SWL 227kg
 Weight 10650kg

Alternative machines

60AJX
 G60X
 Z62

Manufacturer

JLG




RT⁴

A



IPAF
3b

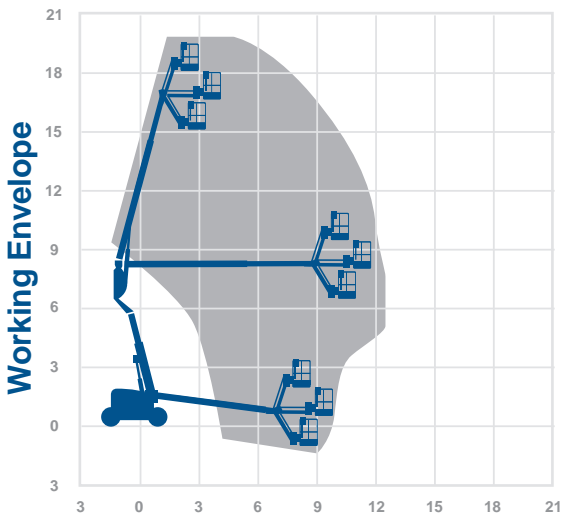

20.29m

12.12m

Rapid Access


S60X

booms

Working Height 20.3m
Horizontal Outreach 15.48m

Manufacturer
Genie

Closed Length	8.5m
Closed Height	2.72m
Closed Width	2.49m
Platform Size	1.83m x 0.76m
	2.44m x 0.91m
Rotation	Continuous
Max SWL	227kg
Weight	9698kg

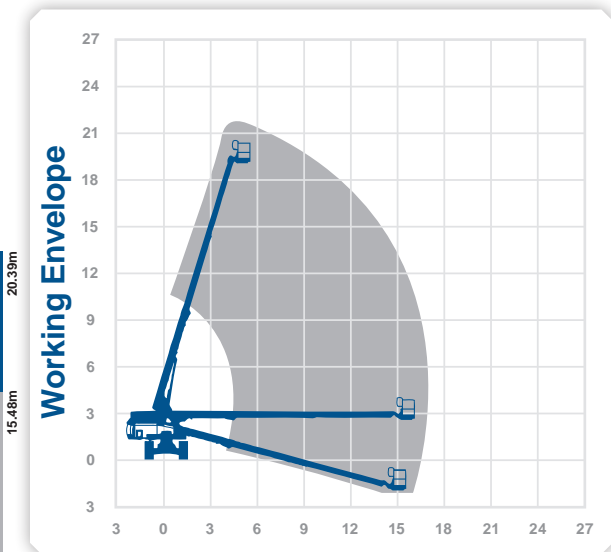


One day of powered access training, years of working safely at height. Call today and get trained with Rapid Access.

Working Height 20.36m
Horizontal Outreach 13.19m
Outreach

Closed Length	9.37m
Closed Height	2.54m
Closed Width	2.42m
Platform Size	0.76m x 1.83m
Rotation	180°
Max SWL	230kg
Weight	7300kg

Manufacturer

JLG

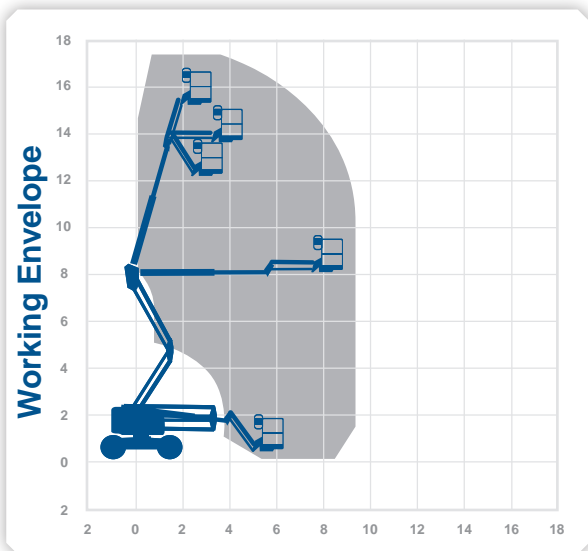

 **Rapid Access**

G60X

booms

Working Height 20.39m
Horizontal Outreach 11.05m
Outreach


Closed Length	8.15m
Closed Height	2.69m
Closed Width	2.46m
Platform Size	1.83m x 0.76m
Rotation	Continuous
Max SWL	227kg
Weight	10,025kg (Air) 10,765kg (Foam Filled)

Alternative machines

600AJ

Manufacturer

Genie

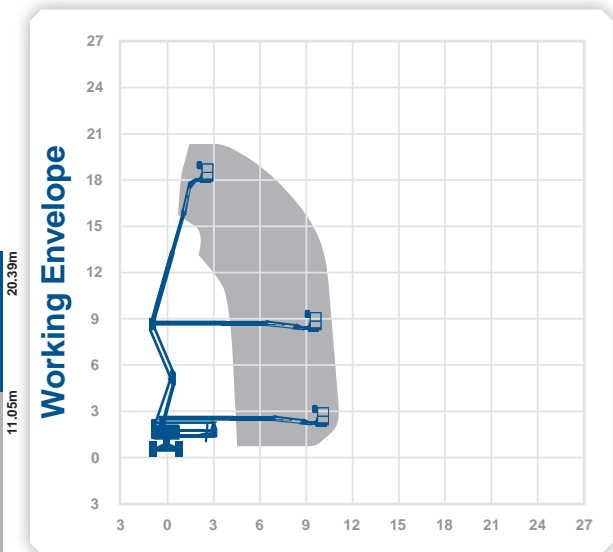


One day of powered access training, years of working safely at height. Call today and get trained with Rapid Access.

Working Height 20.65m
Horizontal Outreach 18.65m
Outreach

Closed Length 8.93m
 Closed Height 2.67m
 Closed Width 2.83m
 Platform Size 1.8m x 0.8m
 Rotation 360°
 Max SWL 230kg
 Weight 11710kg

Manufacturer

Haulotte

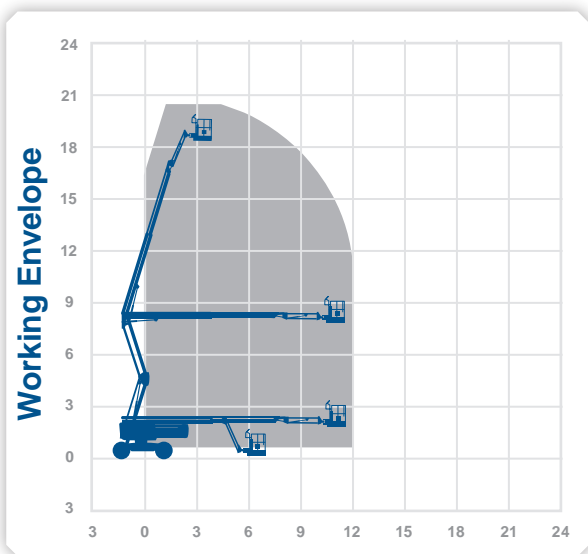


20.65m
18.65m



Working Height 20.87m
Horizontal Outreach 12.47m

Manufacturer
 Genie

Closed Length	9.25m
Closed Height	2.56m
Closed Width	2.49m
Platform Size	0.76m x 1.83m
Rotation	Continuous
Max SWL	227kg
Weight	10766kg
Operational Full Width	2.49m

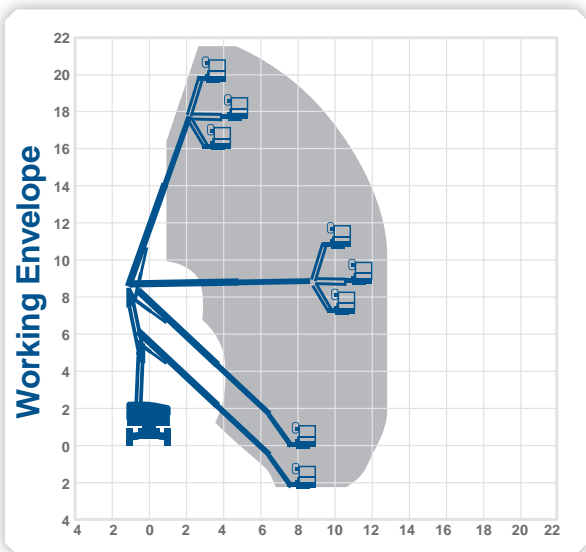

contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Working Height 21.8m
Horizontal Outreach 17.1m


Closed Length 9.5m
 Closed Height 2.72m
 Closed Width 2.5m
 Platform Size 1.83m x 0.76m
 Rotation Continuous
 Max SWL 227kg
 Weight 10102kg
 Reach Below Ground 2.71m

Alternative machines

G65X
 66JX
 S60X

Manufacturer

Genie

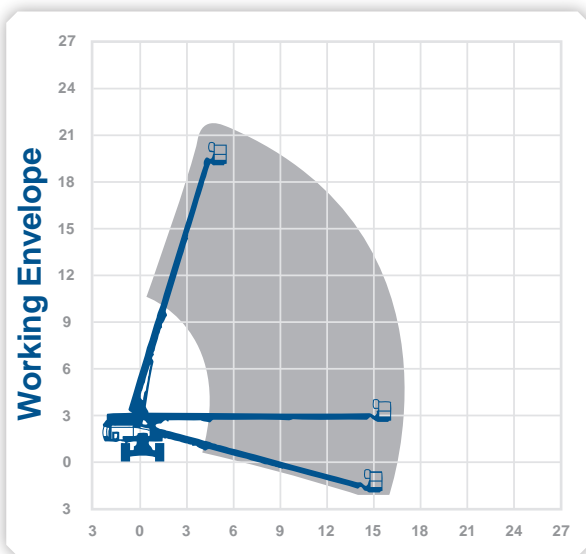

Rapid Access

66JX

booms

Working Height 22.12m
Horizontal Outreach 17.3m

Closed Length 10.21m
Closed Height 2.56m
Closed Width 2.43m
Platform Size 1.83m x 0.91m
Rotation 180°
Max SWL 227kg
Weight 13500kg

Alternative machines

S65X
G65

Manufacturer

JLG



RT⁴


S



IPAF
3b

17.3m 22.12m

Working Envelope

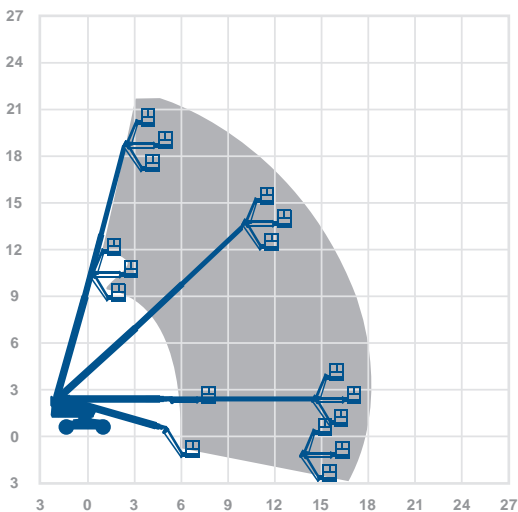


Your powered access solution is just a few clicks away. To find the right machine for your project, visit rapidaccess-gulf.com and follow our step by step 'New to Platforms' guide.

Working Height 22.5m
Horizontal Outreach 18.3m

Manufacturer
 Haulotte

Closed Length 10.4m
 Closed Height 2.7m
 Closed Width 2.47m
 Platform Size 2.44m x 0.91m
 Rotation 360°
 Max SWL 230kg
 Weight 13400kg
 Reach below ground 4.0m

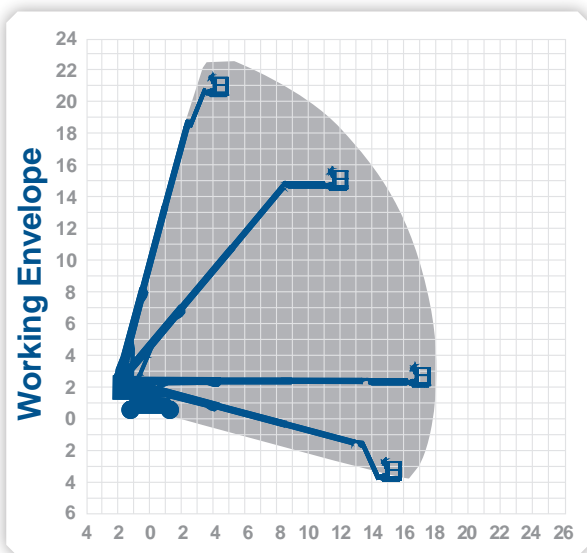

18.3m 22.5m






contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Working Height 25.6m
Horizontal Outreach 16.2m

Closed Length 12.0m
 Closed Height 2.71m
 Closed Width 2.38m
 Platform Size 1.8m x 0.8m
 Rotation 360°
 Max SWL 230kg
 Weight 15890kg

Manufacturer

Haulotte

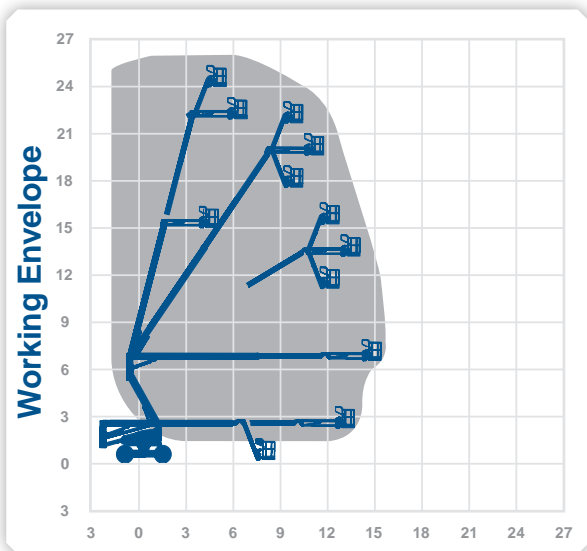

25.6m
16.2m

 **Rapid Access**

Z80

booms

Working Height 25.6m Horizontal Outreach 18.29m


Closed Length	11.27m
Closed Height	3.0m
Closed Width	2.49m
Platform Size	2.44m x 0.91m
Rotation	Continuous
Max SWL	227kg
Weight	17010kg

Alternative machines

80JX

Manufacturer

Genie

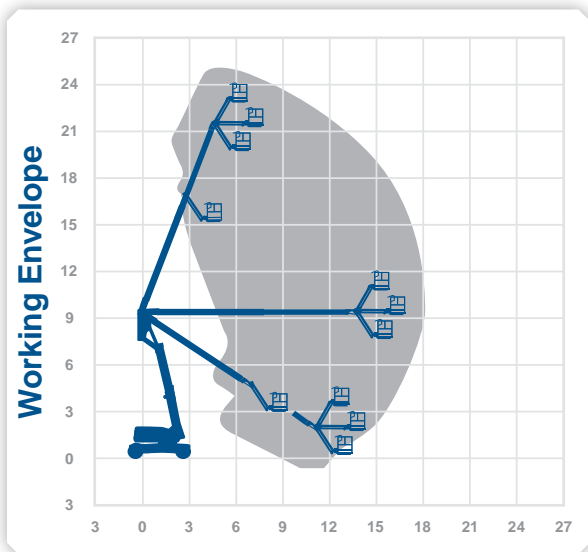

Learn more about our award-winning SkySiren® secondary guarding system by visiting the video gallery on rapidaccess-gulf.com

Working Height 26.38m
Horizontal Outreach 15.74m
Outreach


Closed Length	11.12m
Closed Height	3.0m
Closed Width	2.44m
Platform Size	1.83m x 0.91m
Rotation	360°
Max SWL	230kg
Weight	16110kg

Alternative machines

Z80

Manufacturer

JLG

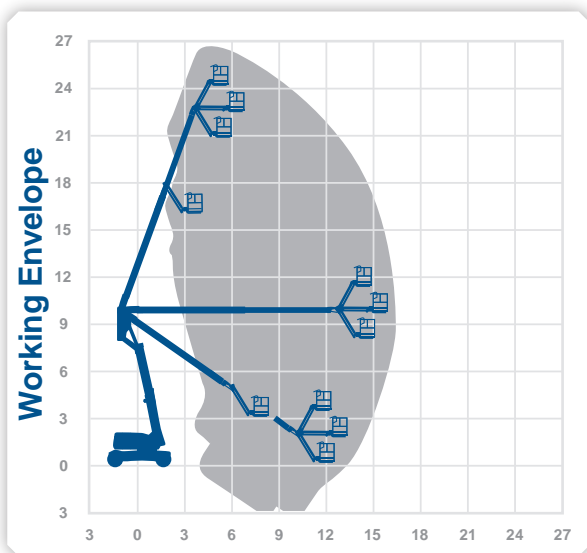

 **Rapid Access**

Working Height 26.38m
Horizontal Outreach 21.79m


Closed Length	11.23m
Closed Height	2.8m
Closed Width	2.49m
Platform Size	1.83m x 0.76m
Rotation	360°
Max SWL	454kg
Weight	16103kg
Reach Below Ground	3.07m
Operational Full Width	1.85m

Manufacturer

Genie



Working Envelope

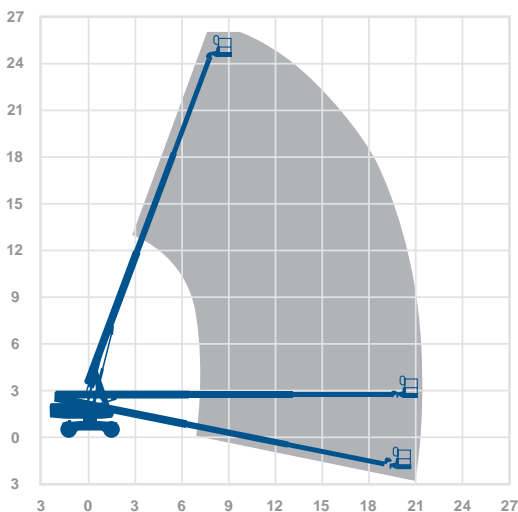

contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Working Height 26.38m

Horizontal Outreach 23.32m

Outreach


Closed Length	12.4m
Closed Height	2.8m
Closed Width	2.5m
Platform Size	1.83m x 0.76m
Rotation	Continuous
Max SWL	227kg
Weight	17236kg
Reach Below Ground	2.89m

Alternative machines

860SJ
G85X

Manufacturer

Genie

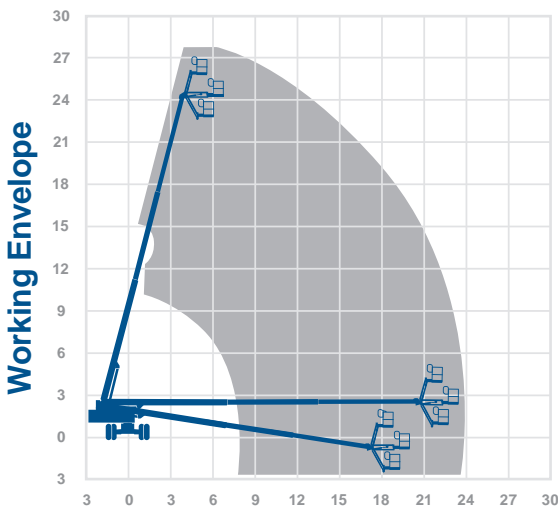

23.32m 26.38m

Working Height 26.4m
Horizontal Outreach 17.5m
Outreach


Closed Length	11.8m
Closed Height	2.97m
Closed Width	2.48m
Platform Size	2.44m x 0.91m
Rotation	360°
Max SWL	250kg
Weight	15500kg

Manufacturer
 Haulotte



26.4m
 17.5m

Working Envelope

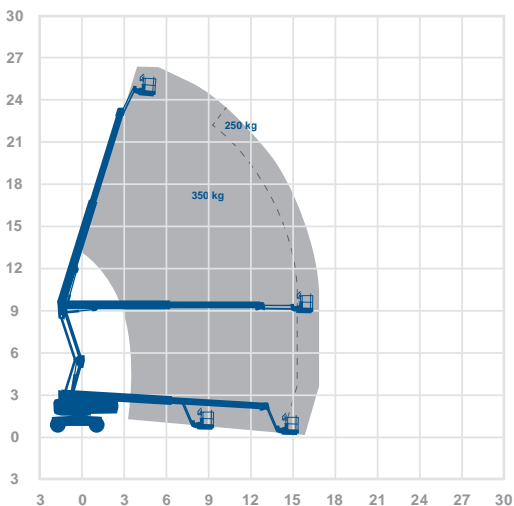

contact@rapidaccess-gulf.com
rapidaccess-gulf.com



 **Rapid Access**

860SJ

booms

Working Height 28.21m Horizontal Outreach 22.86m

Closed Length	12.19m
Closed Height	3.05m
Closed Width	2.49m
Platform Size	2.44m x 0.91m
Rotation	360°
Max SWL	230kg
Weight	17200kg
Reach Below Ground	3m

Alternative machines

G85X


Manufacturer

JLG



22.86m 28.21m

Working Envelope

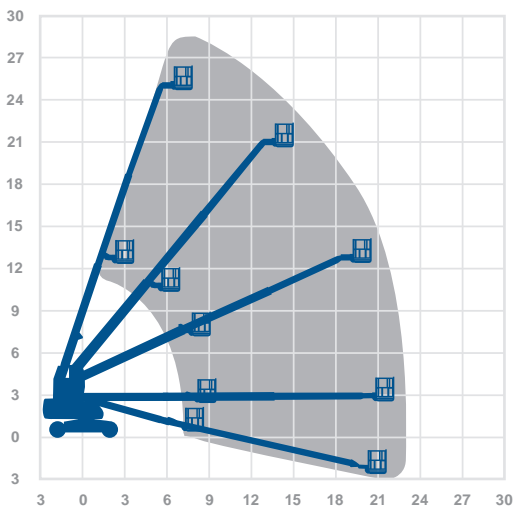

You can find the latest promotions, competitions and news from Rapid Access by following us on our social media pages.

Working Height 31.8m
Horizontal Outreach 21.3m


Closed Length 11.16m
 Closed Height 2.7m
 Closed Width 2.5m
 Platform Size (extended) 0.80m x 2.44m (3.33m)
 Rotation Continuous
 Max SWL 250kg
 Weight 20800kg
 Reach Below Ground 4m

Alternative machines

860SJ
 G85X

Manufacturer

Haulotte

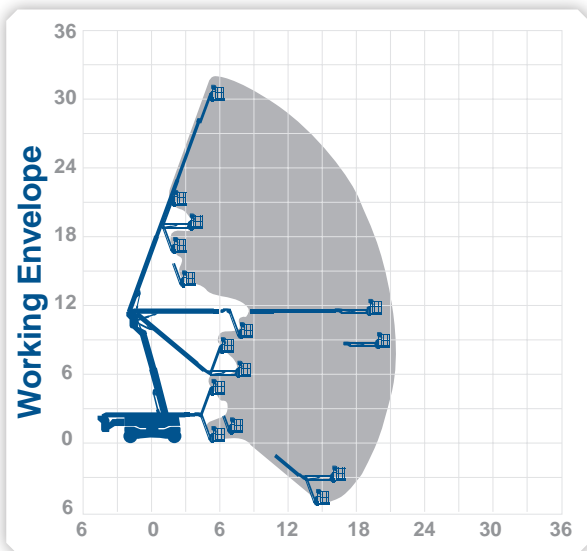

 **Rapid Access**



contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Working Height 38.5m
Horizontal Outreach 22.86m


Closed Length 10.64m
 Closed Height 3.05m
 Closed Width 2.49m
 Platform Size 2.44m x 0.91m
 Rotation Continuous
 Max SWL (Unrestricted) 227kg
 Max SWL (Restricted) 454kg
 Weight 18500kg
 Operational Full Width 3.81m

Alternative machines

S125

Manufacturer

JLG

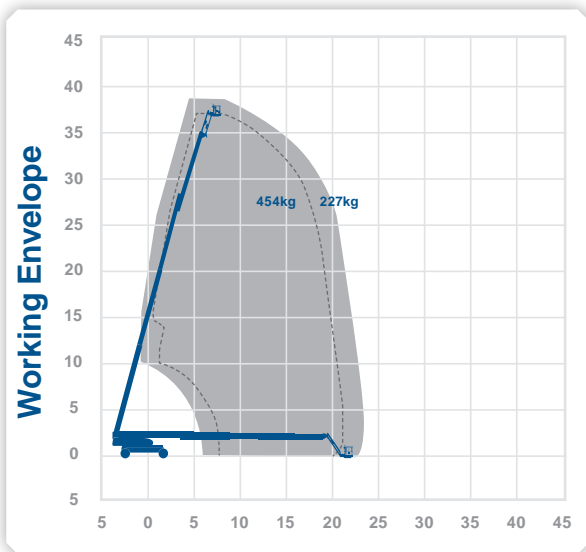

38.5m

22.86m



1250AJP

booms

Working Height **40.1m** Horizontal Outreach **19.25m**

Closed Length	11.45m
Closed Height	3.05m
Closed Width	2.49m
Platform Size	2.44m x 0.91m
Rotation	Continuous
Max SWL (Unrestricted)	227kg
Max SWL (Restricted)	454kg
Weight	19958kg
Operational Full Width	3.81m

Alternative machines


1350SJP
Z135

Manufacturer

JLG

40.1m

19.25m

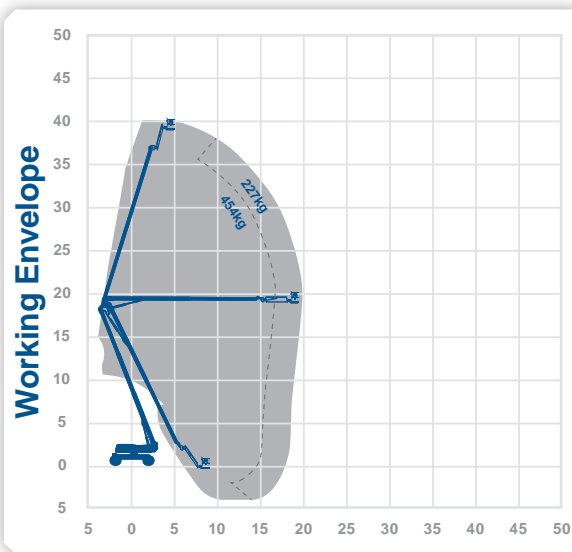


As a business, we are more than the services we provide; we are committed to making a positive impression on the workplaces, environments, markets and communities we serve.

Working Height 40.15m
Horizontal Outreach 24.38m
Outreach

Closed Length	14.25m
Closed Height	3.05m
Closed Width	2.49m
Platform Size	1.83m x 0.76m
Rotation	360°
Max SWL	454kg
Weight	20700kg
Reach Below Ground	2.69m

Manufacturer

Genie

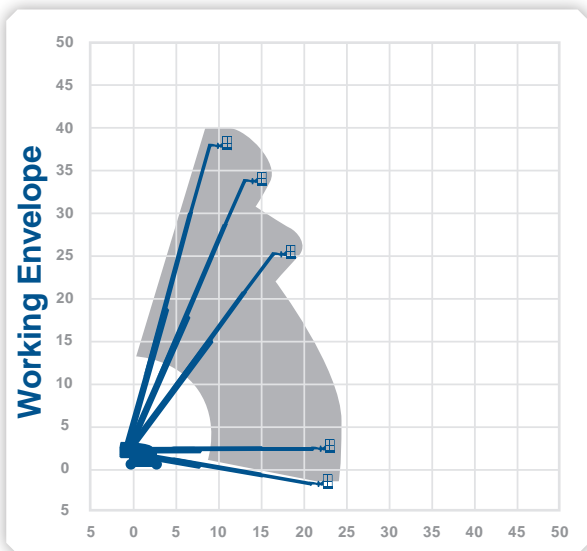

40.15m

24.38m

Rapid Access

Working Height 40.15m

Horizontal Outreach 24.38m

Closed Length	14.25m
Closed Height	3.07m
Closed Width	2.49m
Platform Size	2.44m x 0.91m
Rotation	Continuous
Max SWL	227kg
Weight	20248kg
Operational Full Width	3.35m

Alternative machines

1200SJP
1350SJP

Manufacturer


Genie

40.15m

24.38m



Working Envelope

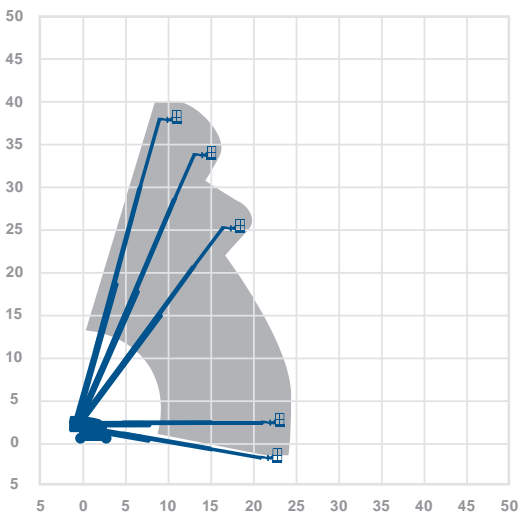

contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Working Height 41.5m
Horizontal Outreach 19.8m


Manufacturer

Haulotte

Closed Length 12.6m
Closed Height 2.99m
Closed Width 2.5m
Platform Size 2.44m x 0.8m
Rotation 360°
Max SWL 230kg
Weight 23000kg



Working Envelope

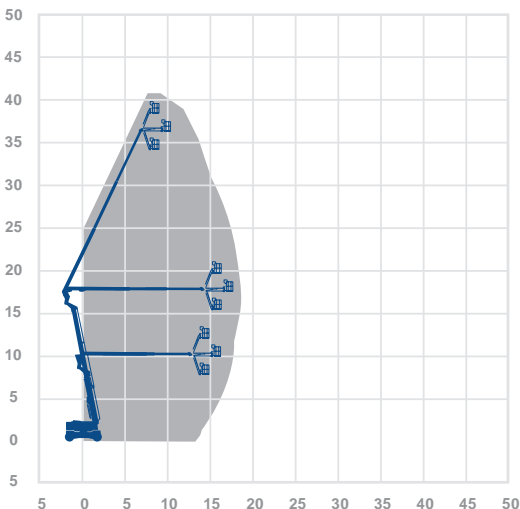

41.5m

19.8m

Working Height 41.5m
Horizontal Outreach 20.1m
Outreach


Closed Length	11.0m
Closed Height	2.99m
Closed Width	2.5m
Platform Size	2.44m x 0.91m
Rotation	360°
Max SWL	230kg
Weight	23900kg
Reach Below Ground	1.5m

Manufacturer

Haulotte

41.5m

20.1m

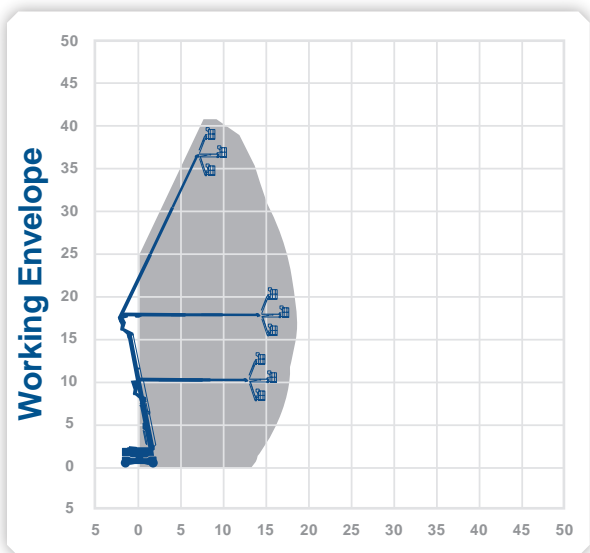

contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Working Height 42.2m
Horizontal Outreach 20.2m


Closed Length 12.3m
Closed Height 3.05m
Closed Width 2.5m
Platform Size 2.44m x 0.91m
Rotation 360°
Max SWL 450kg
Weight 21400kg

Manufacturer

Haulotte



Working Envelope

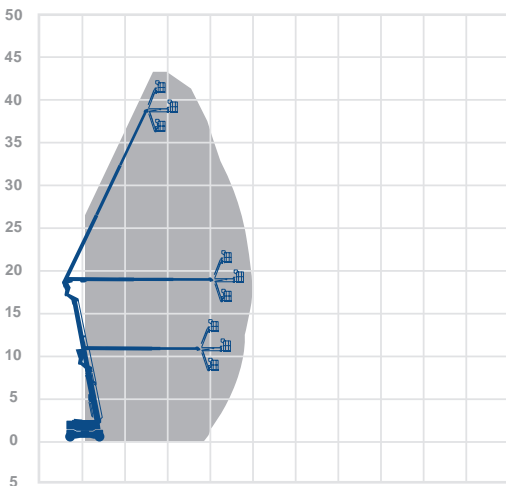

42.2m

20.2m

Working Height 43.15m

Horizontal Outreach 21.26m


Closed Length	12.93m
Closed Height	3.07m
Closed Width	2.46m
Platform Size	2.44m x 0.91m
Rotation	Continuous
Max SWL	272kg
Weight	20366kg
Reach Below Ground	5.87m
Operational Full Width	3.94m

Alternative machines

1250AJP
1350SJP
150HAX

Manufacturer

Genie

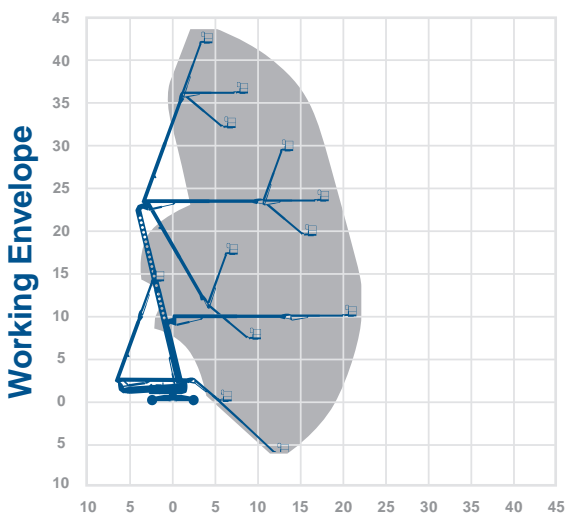

contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Working Height **43.15m** Horizontal Outreach **21.26m**

Closed Length	12.93m
Closed Height	3.09m
Closed Width	2.49m
Platform Size	2.44m x 0.91m
Rotation	Continuous
Max SWL	272kg
Weight	20502kg
Reach Below Ground	5.87m
Operational Full Width	5.03m

Alternative machines


Z135
150HAX
1350SJP
1250AJP

Manufacturer

Genie



Working Envelope

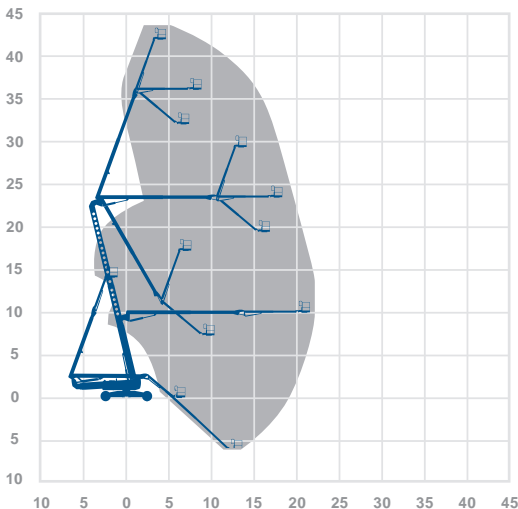

43.15m

21.26m



contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Working Height 43.15m
Horizontal Outreach 27.43m

Closed Length	19.76m
Closed Height	3.05m
Closed Width	2.49m
Platform Size	0.91m x 2.44m
Rotation	360°
Max SWL	454kg
Weight	21546kg
Reach Below Ground	6.0m
Operational Full Width	3.94m

Alternative machines


SX135H

Manufacturer

Genie



Working Envelope

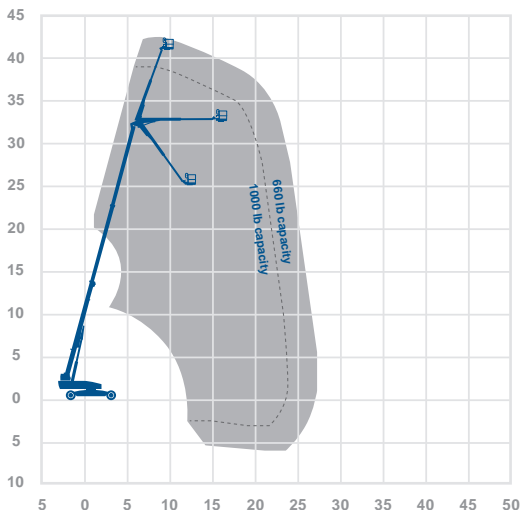

43.15m

27.43m

Working Height **43.1m** Horizontal Outreach **24.38m**

Closed Length	11.86m
Closed Height	3.05m
Closed Width	2.49m
Platform Size	2.44m x 0.91m
Rotation	Continuous
Max SWL (Unrestricted)	227kg
Max SWL (Restricted)	454kg
Weight	20400kg
Operational Full Width	3.81m

Alternative machines


Z135
1200SJP
S125

Manufacturer

JLG

43.1m

24.38m

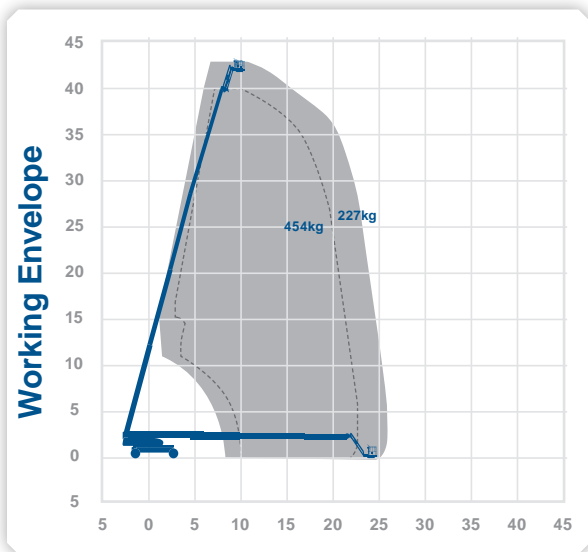

contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Working Height 47.72m

Horizontal Outreach 24.15m


Closed Length	12.01m
Closed Height	4.27m
Closed Width	3.51m
Platform Size	2.44m x 0.91m
Rotation	Continuous
Max SWL (Unrestricted)	227kg
Max SWL (Restricted)	454kg
Weight	26500kg
Reach Below Ground	9.25m
Operational Full Width	5.49m

Alternative machines

T50JB
Z135

Manufacturer

JLG

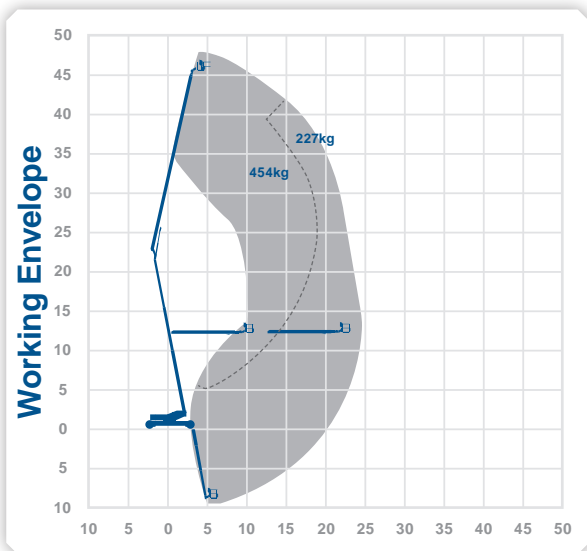

47.72m

24.15m

Working Height 48.02m Horizontal Outreach 24.38m

Closed Length	16.18m
Closed Height	3.05m
Closed Width	2.49m
Platform Size	2.44m x 0.91m
Rotation	Continuous
Max SWL	340kg
Weight	23236kg
Reach Below Ground	0.91m
Operational Full Width	5.03m

Alternative machines


SX180

Manufacturer

Genie

48.02m

24.38m

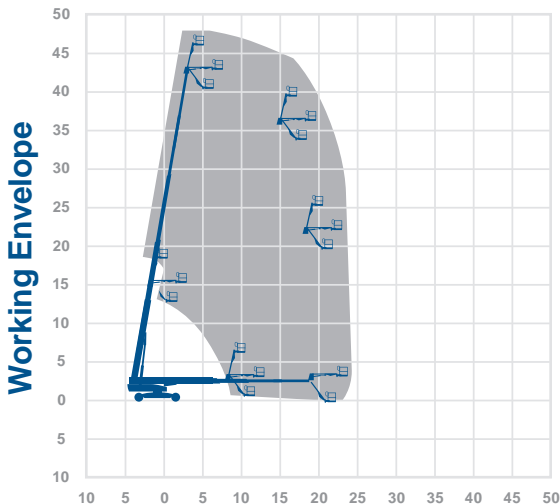

contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Working Height 56.86m
Horizontal Outreach 24.38m
Outreach


Manufacturer
 Genie

Closed Length	14.33m
Closed Height	3.05m
Closed Width	2.49m
Platform Size	0.91m X 2.44m
Rotation	Continuous
Max SWL	340kg
Weight	25095kg
Operational Full Width	5.03m

56.86m



Working Envelope

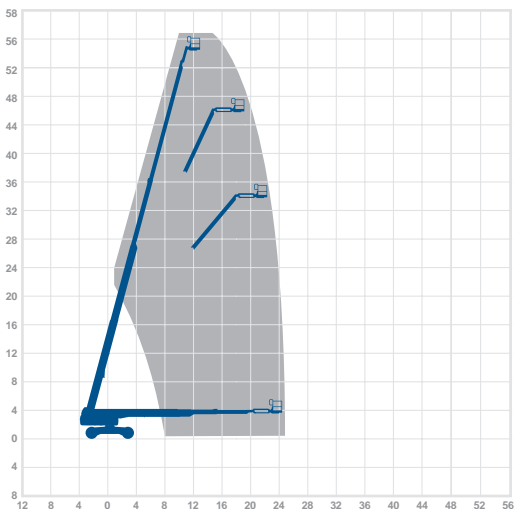

24.38m



contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Tracked Boom Lifts



Contact our hire team for expert advice and assistance

contact@rapidaccess-gulf.com

rapidaccess-gulf.com

Tracked Boom Lifts

- Available to hire on either operated or self-operated basis
- Can be operated with IPAF 1b license
- Allows access to restricted areas that traditional booms can't
- Lithium battery models are available
- Reduces the ground bearing pressure on soft ground and delicate flooring
- Allows greater stability for work on uneven surfaces
- Easily transportable
- Can be used for a variety of applications including facilities management and retail
- Working heights up to 25m

For more information please call your local depot (refer to page 5) or visit rapidaccess-gulf.com



Hinowa 1470


tracked
booms

Working Height 14.0m

**Horizontal
Outreach** 7.0m

Closed Length	4.06m
Closed Height	1.99m
Rails Up / Fixed Rails	
Closed Width	0.78m
DeckSize	1.33m x 0.69m
Rotation	360°
SWL	200kg
Weight	1750kg
Outrigger Footprint	2.7m x 2.7m
Min Op Width	2.7m

Manufacturer
Hinowa

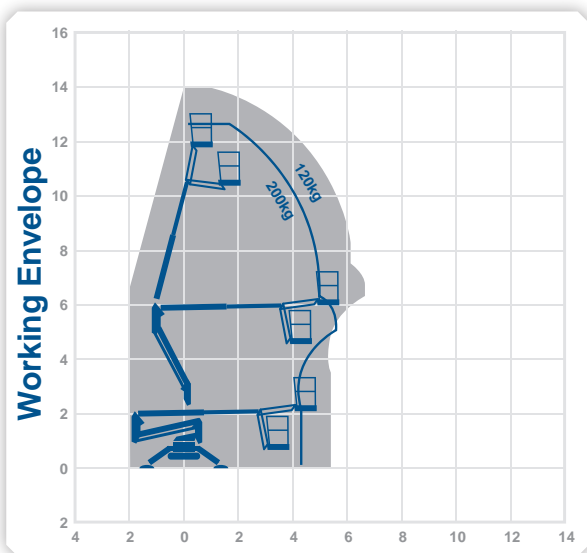

 **Rapid Access**

Lightlift 15.70

tracked booms

Working Height 15.4m
**Horizontal
Outreach** 6.6m


Closed Length	4.02m
Closed Height	1.99m
Rails Up / Fixed Rails	
Closed Width	0.75m
DeckSize	1.33m x 0.69m
Rotation	360°
SWL	230kg
Weight	1950kg
Outrigger Footprint	2.8m x 2.8m
Min Op Width	2.8m

Manufacturer
Hinowa



15.4m
6.6m

Working Envelope

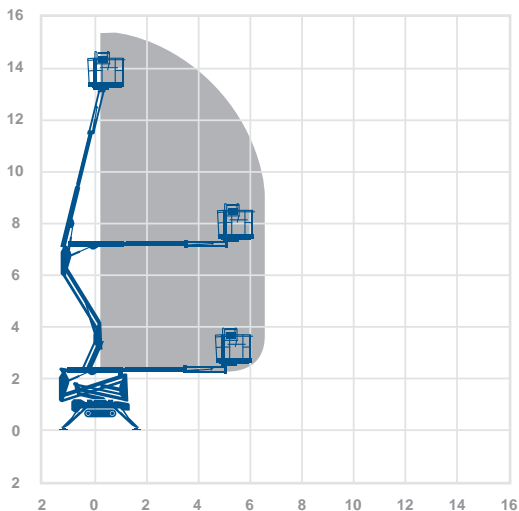

contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Working Height 17.6m

**Horizontal
Outreach** 7.4m

Closed Length 4.71m

Closed Height 2.0m

Rails Up / Fixed Rails

Closed Width 0.78m

DeckSize 1.42m x 1.1m

Rotation 355°

SWL 200kg


Weight 2400kg

Outrigger Footprint 3.32m x 3.13m

Min Op Width 2.88m

Manufacturer

Teupen

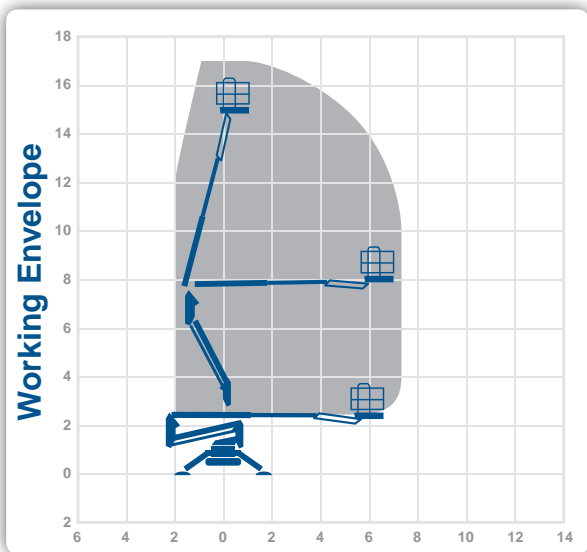

 **Rapid Access**

Working Height 18.8m

**Horizontal
Outreach** 6.4m

Manufacturer
Hinowa


Closed Length	4.45m
Closed Height Rails Up / Fixed Rails	2.0m
Closed Width	1.48m
DeckSize	1.30m x 1.1m
Rotation	360°
SWL	200kg
Weight	2080kg
Outrigger Footprint	2.9m x 2.9m
Min Op Width	n/a



18.8m

6.4m

Working Envelope

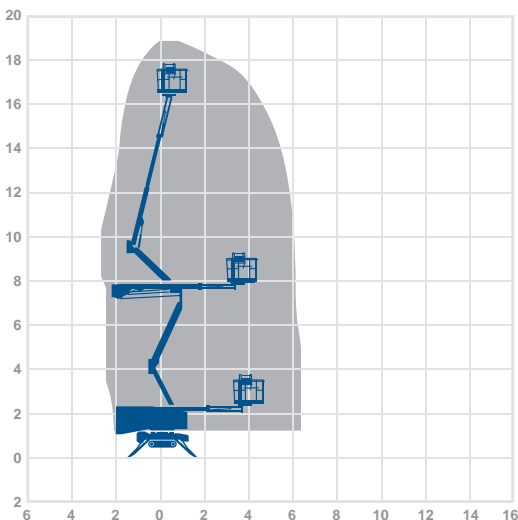

contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Working Height 20.1m


**Horizontal
Outreach** 9.7m

Manufacturer
Hinowa

Closed Length	5.01m
Closed Height	1.99m
Rails Up / Fixed Rails	
Closed Width	0.79m
DeckSize	1.33m x 0.69m
Rotation	360°
SWL	230kg
Weight	2880kg
Outrigger Footprint	2.92m x 2.92m
Min Op Width	2.92m



Working Envelope

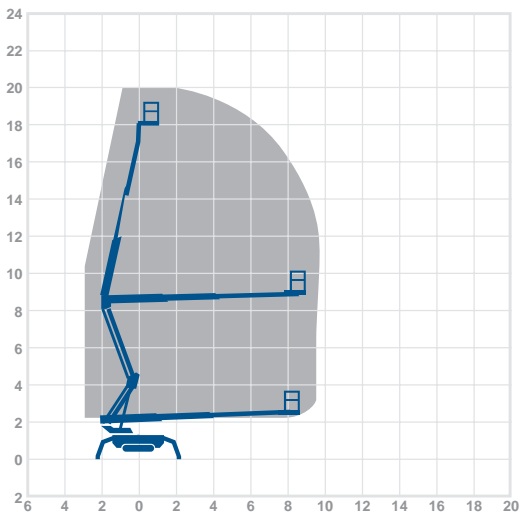

20.1m

9.7m

 **Rapid Access**

Working Height 21.0m

Horizontal Outreach 10.0m

Closed Length	8.05m
Closed Height	2.46m
Rails Up / Fixed Rails	
Closed Width	2.07m
DeckSize	2.44m x 0.91m
Rotation	360°
SWL	200kg
Weight	2500kg
Outrigger Footprint	3.75m x 4.40m
Min Op Width	2.92m


Manufacturer
Denka Lift



21.0m

10.0m

Working Envelope

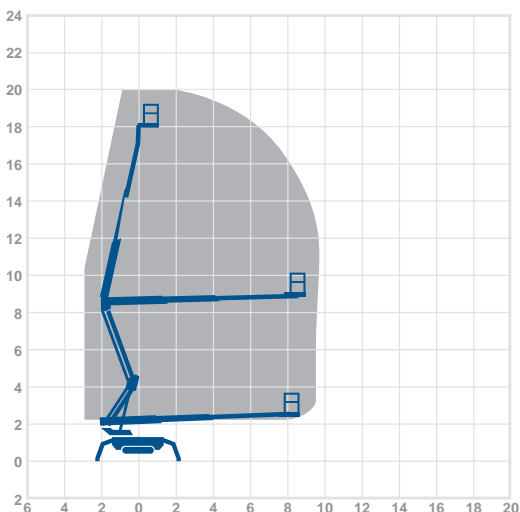


contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Working Height 25.6m
Horizontal Outreach 13.1m

Manufacturer
 JLG

Closed Length 6.35m
 Closed Height 1.99m
 Rails Up / Fixed Rails
 Closed Width 0.99m
 DeckSize 1.34m x 0.69m
 Rotation 360°
 SWL 230kg
 Weight 4365kg
 Outrigger Footprint 5.4m x 3.9m

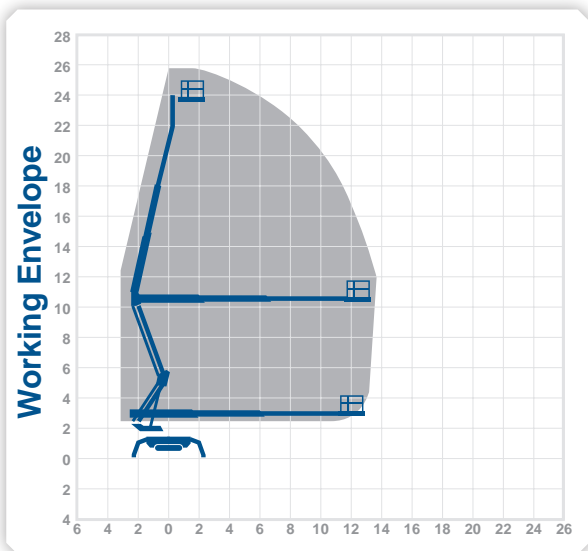

25.6m

13.1m

Rapid Access



contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Truck Mounted



Contact our hire team for expert advice and assistance

contact@rapidaccess-gulf.com

rapidaccess-gulf.com

Truck Mounted

- Working heights up to 32m
- Self drive option available
- Most cost effective method of access for short term hires
- Models with SWL of up to 320kg

For more information please call your local depot (refer to page 5) or visit rapidaccess-gulf.com



Working Height **22.0m** Outreach **17.5m**


Max Reach Below 0m	n/a
Overall Travel Length	9.2m
Overall Travel Height	3.5m
Overall Travel Width	2.4m
Platform Cage Size	1.8m x 1.1m
Max SWL*	280kg
Gross Vehicle Weight	7500kg
Operational Full Width	4.5m
Minimum Operational Width	2.5m
Point Load Front / Rear	60kN/60kN

Alternative machines

T22GS
T22GSH

Manufacturer

Ascendant

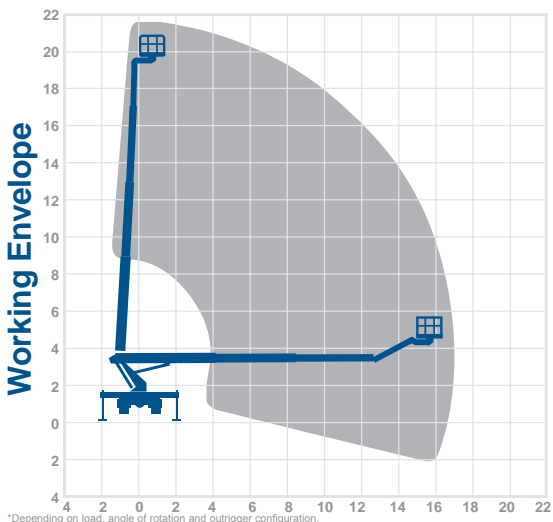


17.5m 22.0m

Working Height **27.0m** Outreach** **21.0m** (100kg)

Max Horiz. Outreach (full SWL)	16.0m
Max Reach Below 0m	n/a
Overall Travel Length	7.87m
Overall Travel Height	3.3m
Overall Travel Width	2.54m
Platform Cage Size	1.85m x 1.0m
Max SWL	320kg
Gross Vehicle Weight	7500kg
Operational Full Width	5.1m
Minimum Operational Width	2.5m
Point Load Front / Rear	72kN/55kN

Manufacturer
Ruthmann

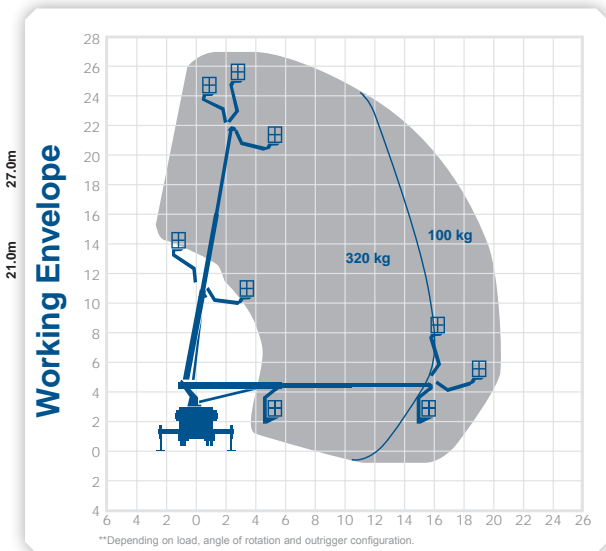


contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Working Height **32.0m** Outreach **20.0m**

Max Reach Below 0m	n/a
Overall Travel Length	8.4m
Overall Travel Height	3.84m
Overall Travel Width	2.5m
Platform Cage Size	2.4m x 0.8m
Max SWL	280kg
Gross Vehicle Weight	17520kg
Operational Full Width	3.75m
Minimum Operational Width	3.75m
Point Load Front / Rear	140kN/140kN

Manufacturer
CTE

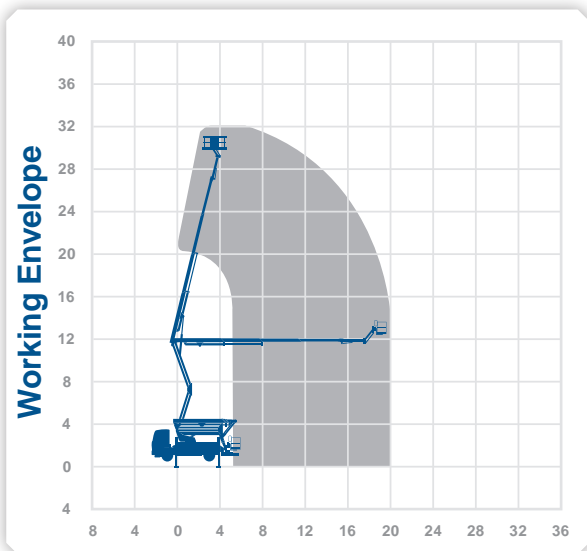

32.0m

20.0m



contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Telehandlers



Contact our hire team for expert advice and assistance

contact@rapidaccess-gulf.com

rapidaccess-gulf.com

Telehandlers

- Ideal for lifting heavy materials to height
- Rough terrain forklifts
- Large lift capacity

For more information please call your local depot (refer to page 5) or visit rapidaccess-gulf.com




Max Lift Height 16.70m
Max Forward Reach 12.85m

Manufacturer
Haulotte

Overall Length 6.70m
Overall Height 2.60m
Overall Width 2.43m
Max Capacity 4000kg
Max Lift Capacity (full reach) 700kg
Gross Vehicle Weight 11710kg



Working Envelope

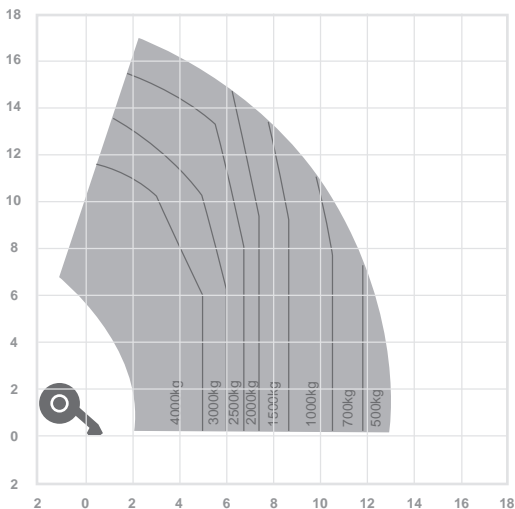

12.85m 16.70m



contact@rapidaccess-gulf.com
rapidaccess-gulf.com

Useful Information



Contact our hire team for expert advice and assistance

contact@rapidaccess-gulf.com

rapidaccess-gulf.com



Distance Conversion

Metric to Imperial (m x 3.281 = ft)				Imperial to Metric (ft x 0.3048 = m)			
m	ft	m	ft	ft	m	ft	m
6.0	- 19' 8"	39.5	- 129' 7"	15	-	4.57	
6.5	- 21' 4"	40.0	- 131' 3"	20	-	6.10	
7.0	- 23' 0"	40.5	- 132' 10"	25	-	7.62	
7.5	- 24' 7"	41.0	- 134' 6"	30	-	9.14	
8.0	- 26' 4"	41.5	- 136' 2"	35	-	10.67	
8.5	- 27' 11"	42.0	- 137' 10"	40	-	12.19	
9.0	- 29' 4"	42.5	- 139' 6"	45	-	13.72	
9.5	- 31' 2"	43.0	- 141' 1"	50	-	15.24	
10.0	- 32' 10"	43.5	- 142' 9"	55	-	16.76	
10.5	- 34' 6"	44.0	- 144' 5"	60	-	18.29	
11.0	- 36' 1"	44.5	- 146' 0"	65	-	19.81	
11.5	- 37' 10"	45.0	- 147' 7"	70	-	21.34	
12.0	- 39' 5"	45.5	- 149' 3"	75	-	22.86	
12.5	- 41' 0"	46.0	- 150' 11"	80	-	24.38	
13.0	- 42' 8"	46.5	- 152' 7"	85	-	25.91	
13.5	- 44' 3"	47.0	- 154' 3"	90	-	27.43	
14.0	- 45' 11"	47.5	- 155' 10"	95	-	28.96	
14.5	- 47' 7"	48.0	- 157' 6"	100	-	30.48	
15.0	- 49' 2"	48.5	- 159' 1"	105	-	32.00	
15.5	- 50' 10"	49.0	- 160' 9"	110	-	33.53	
16.0	- 52' 6"	49.5	- 162' 5"	115	-	35.05	
16.5	- 54' 1"	50.0	- 164' 1"	120	-	36.58	
17.0	- 55' 9"	50.5	- 165' 9"	125	-	38.10	
17.5	- 57' 5"	51.0	- 167' 4"	130	-	39.62	
18.0	- 59' 1"	51.5	- 168' 11"	135	-	41.15	
18.5	- 60' 8"	52.0	- 170' 7"	140	-	42.67	
19.0	- 62' 3"	52.5	- 172' 3"	145	-	44.20	
19.5	- 63' 11"	53.0	- 173' 10"	150	-	45.72	
20.0	- 65' 7"	53.5	- 175' 6"	155	-	47.24	
20.5	- 67' 3"	54.0	- 177' 2"	160	-	48.77	
21.0	- 68' 11"	54.5	- 178' 10"	165	-	50.29	
21.5	- 70' 7"	55.0	- 180' 6"	170	-	51.82	
22.0	- 72' 2"	55.5	- 182' 1"	175	-	53.34	
22.5	- 73' 9"	56.0	- 183' 9"	180	-	54.86	
23.0	- 75' 6"	56.5	- 185' 4"	185	-	56.39	
23.5	- 77' 1"	57.0	- 187' 0"	190	-	57.91	
24.0	- 78' 9"	57.5	- 188' 8"	195	-	59.44	
24.5	- 80' 4"	58.0	- 190' 3"	200	-	60.96	
25.0	- 82' 0"	58.5	- 191' 11"	205	-	62.48	
25.5	- 83' 7"	59.0	- 193' 7"	210	-	64.01	
26.0	- 85' 3"	59.5	- 195' 2"	215	-	65.53	
26.5	- 86' 11"	60.0	- 196' 9"	220	-	67.06	
27.0	- 88' 7"	60.5	- 198' 6"	225	-	68.58	
27.5	- 90' 3"	61.0	- 200' 1"	230	-	70.10	
28.0	- 91' 9"	61.5	- 201' 9"	235	-	71.63	
28.5	- 93' 6"	62.0	- 203' 5"	240	-	73.15	
29.0	- 95' 1"	62.5	- 205' 0"	245	-	74.68	
29.5	- 96' 9"	63.0	- 206' 8"	250	-	76.20	
30.0	- 98' 4"	63.5	- 208' 3"	255	-	77.72	
30.5	- 100' 1"	64.0	- 209' 11"	260	-	79.24	
31.0	- 101' 10"	64.5	- 211' 8"	265	-	80.77	
31.5	- 103' 5"	65.0	- 213' 3"	270	-	82.30	
32.0	- 105' 0"	65.5	- 214' 11"	275	-	83.82	
32.5	- 106' 8"	66.0	- 216' 6"				
33.0	- 108' 3"	66.5	- 218' 3"				
33.5	- 109' 11"	67.0	- 219' 10"				
34.0	- 111' 7"	67.5	- 221' 6"				
34.5	- 113' 2"	68.0	- 223' 1"				
35.0	- 114' 10"	68.5	- 224' 9"				
35.5	- 116' 6"	69.0	- 226' 4"				
36.0	- 118' 1"	69.5	- 228' 0"				
36.5	- 119' 9"	70.0	- 229' 8"				
37.0	- 121' 5"	70.5	- 231' 4"				
37.5	- 123' 0"	71.0	- 232' 11"				
38.0	- 124' 8"	71.5	- 234' 7"				
38.5	- 126' 4"	72.0	- 236' 2"				
39.0	- 127' 11"	72.5	- 237' 5"				

Weight Conversion

Metric to Imperial (kg x 2.204 = lbs)

kg	lbs	kg	lbs
500	- 1,102	27,000	- 59,524
1,000	- 2,204	27,500	- 60,627
1,500	- 3,306	28,000	- 61,729
2,000	- 4,409	28,500	- 62,831
2,500	- 5,511	29,000	- 63,933
3,000	- 6,613	29,500	- 65,036
3,500	- 7,716	30,000	- 66,138
4,000	- 8,818	30,500	- 67,240
4,500	- 9,920	31,000	- 68,343
5,000	- 11,023	31,500	- 69,445
5,500	- 12,125	32,000	- 70,547
6,000	- 13,227	32,500	- 71,650
6,500	- 14,330	33,000	- 72,752
7,000	- 15,432	33,500	- 73,854
7,500	- 16,534	34,000	- 74,957
8,000	- 17,636	34,500	- 76,059
8,500	- 18,739	35,000	- 77,161
9,000	- 19,841	35,500	- 78,264
9,500	- 20,943	36,000	- 79,366
10,000	- 22,046	36,500	- 80,468
10,500	- 23,148	37,000	- 81,570
11,000	- 24,250	37,500	- 82,673
11,500	- 25,353	38,000	- 83,775
12,000	- 26,455	38,500	- 84,877
12,500	- 27,557	39,000	- 85,980
13,000	- 28,660	39,500	- 87,082
13,500	- 29,762	40,000	- 88,184
14,000	- 30,864	40,500	- 89,287
14,500	- 31,966	41,000	- 90,389
15,000	- 33,069	41,500	- 91,491
15,500	- 34,171	42,000	- 92,594
16,000	- 35,273	42,500	- 93,696
16,500	- 36,376	43,000	- 94,798
17,000	- 37,478	43,500	- 95,900
17,500	- 38,580	44,000	- 97,003
18,000	- 39,683	44,500	- 98,105
18,500	- 40,785	45,000	- 99,207
19,000	- 41,887	45,500	- 100,310
19,500	- 42,990	46,000	- 101,412
20,000	- 44,092	46,500	- 102,514
20,500	- 45,194	47,000	- 103,617
21,000	- 46,297	47,500	- 104,719
21,500	- 47,399	48,000	- 105,792
22,000	- 48,501	48,500	- 106,924
22,500	- 49,603	49,000	- 108,026
23,000	- 50,706	49,500	- 109,128
23,500	- 51,808	50,000	- 110,231
24,000	- 52,910	50,500	- 111,333
24,500	- 54,013	51,000	- 112,435
25,000	- 55,115	51,500	- 113,537
25,500	- 56,217	52,000	- 114,640
26,000	- 57,320	52,500	- 115,742
26,500	- 58,422	53,000	- 116,844

Imperial to Metric (lbs x 0.4536 = kg)

lbs	kg	lbs	kg
1,000	- 453	54,000	- 24,493
2,000	- 907	55,000	- 24,947
3,000	- 1,360	56,000	- 25,401
4,000	- 1,814	57,000	- 25,854
5,000	- 2,267	58,000	- 26,308
6,000	- 2,721	59,000	- 26,761
7,000	- 3,175	60,000	- 27,215
8,000	- 3,628	61,000	- 27,669
9,000	- 4,082	62,000	- 28,122
10,000	- 4,535	63,000	- 28,576
11,000	- 4,989	64,000	- 29,029
12,000	- 5,443	65,000	- 29,483
13,000	- 5,896	66,000	- 29,937
14,000	- 6,350	67,000	- 30,390
15,000	- 6,803	68,000	- 30,844
16,000	- 7,257	69,000	- 31,297
17,000	- 7,711	70,000	- 31,751
18,000	- 8,164	71,000	- 32,205
19,000	- 8,618	72,000	- 32,658
20,000	- 9,071	73,000	- 33,112
21,000	- 9,525	74,000	- 33,565
22,000	- 9,979	75,000	- 34,019
23,000	- 10,432	76,000	- 34,472
24,000	- 10,886	77,000	- 34,926
25,000	- 11,339	78,000	- 35,380
26,000	- 11,793	79,000	- 35,833
27,000	- 12,246	80,000	- 36,287
28,000	- 12,700	81,000	- 36,740
29,000	- 13,154	82,000	- 37,194
30,000	- 13,607	83,000	- 37,648
31,000	- 14,061	84,000	- 38,101
32,000	- 14,514	85,000	- 38,555
33,000	- 14,968	86,000	- 39,008
34,000	- 15,422	87,000	- 39,462
35,000	- 15,875	88,000	- 39,916
36,000	- 16,329	89,000	- 40,369
37,000	- 16,782	90,000	- 40,823
38,000	- 17,236	91,000	- 41,276
39,000	- 17,690	92,000	- 41,730
40,000	- 18,143	93,000	- 42,184
41,000	- 18,597	94,000	- 42,637
42,000	- 19,050	95,000	- 43,091
43,000	- 19,504	96,000	- 43,544
44,000	- 19,958	97,000	- 43,998
45,000	- 20,411	98,000	- 44,452
46,000	- 20,865	99,000	- 44,905
47,000	- 21,318	100,000	- 45,359
48,000	- 21,772	101,000	- 45,812
49,000	- 22,226	102,000	- 46,266
50,000	- 22,679	103,000	- 46,719
51,000	- 23,133	104,000	- 47,173
52,000	- 23,586	105,000	- 47,628
53,000	- 24,040	106,000	- 48,081

Product Code	Page Number	Product Code	Page Number
3219	41	GS2646	49
3220	46	GS32D	60
3226	52	GS3369BE	61
3246	57	GS3369RT	58
4626	50	GS4047	69
4632	59	GS43	72
1200SJP	119	GS53	74
1250AJP	120	HA120PX	81
1350SJP	130	HA12CJ+	79
150HAX	131	HA16RTJ	95
3394RT	66	HA20PX	103
4069-O	79	HA20RTJPRO	98
439RT	67	HA23RTJ	107
45JSX	84	HA260PX	109
600AJX	99	HA26RTJPRO	114
66JX	106	HA32PX	117
80JX	111	HA41PXNT	123
860SJ	116	HA41RTJPRO	124
COMPACT 10	55	HINOWA 1470	137
COMPACT 10N	54	HINOWA 1965	140
COMPACT 12	63	HR12NB	80
COMPACT 12DX	65	HR15NB	83
COMPACT 12SX	64	HT43RTJPRO	125
COMPACT 14	68	HTL 4017	152
COMPACT 15SX	71	LEO18GT	139
COMPACT 18SX	73	LIGHTLIFT 15.70	138
COMPACT 8	48	LIGHTLIFT 20.10	141
DL21	142	M60J	101
E45AJ	85	NANO	32
ECO WR	31	NANO SP	33
ECOLIFT	30	NANO SP+	34
EX2032	47	OPTIMUM 8	42
EX2646	51	PECOLIFT	29
G30N	78	POWERTOWER	35
G60X	102	S125	122
GR12	36	S45X	87
GR15	37	S60X	100
GS1932	43	S65X	105
GS2032	44	S80X	112
GS2632	53	S85	113

Product Code

Product Code	Page Number	Product Code	Page Number
SX125XC	121	Z45B	92
SX135XC	129	Z45BJ	90
SX150	132	Z45DJX	94
SX180	133	Z45DJXC	88
T22M	147	Z45DX	89
T27R	148	Z45EJ	91
T32C	149	Z51D	96
X26	143	Z60-37FE	97
Z135	126	Z62/40	104
Z30NRJ	77	Z80	110
Z34-22BE	82	ZX135/70	127

Low Level Access

Product Code	Page Number	Product Code	Page Number
PECOLIFT	29	NANO SP+	34
ECOLIFT	30	POWERTOWER	35
ECO WR	31	GR12	36
NANO	32	GR15	37
NANO SP	33		

Scissor Lifts

Product Code	Page Number	Product Code	Page Number
3219	41	4632	59
OPTIMUM 8	42	GS32D	60
GS1932	43	GS3369BE	61
GS2032	44	COMPACT 12	63
3220	46	COMPACT 12SX	64
EX2032	47	COMPACT 12DX	65
COMPACT 8	48	3394RT	66
GS2646	49	439RT	67
4626	50	COMPACT 14	68
EX2646	51	GS4047	69
3226	52	4069-O	79
GS2632	53	COMPACT 15SX	71
COMPACT 10N	54	GS43	72
COMPACT 10	55	COMPACT 18SX	73
3246	57	GS53	74
GS3369RT	58		

Boom Lifts

Product Code	Page Number	Product Code	Page Number
Z30NRJ	77	Z45DX	89
G30N	78	Z45BJ	90
HA12CJ+	79	Z45EJ	91
HR12NB	80	Z45B	92
HA120PX	81	Z45DJX	94
Z34-22BE	82	HA16RTJ	95
HR15NB	83	Z51D	96
45JSX	84	Z60-37FE	97
E45AJ	85	HA20RTJPRO	98
S45X	87	600AJX	99
Z45DJXC	88	S60X	100

Boom Lifts Continued

Product Code	Page Number	Product Code	Page Number
M60J	101	1200SJP	119
G60X	102	1250AJP	120
HA20PX	103	SX125XC	121
Z62/40	104	S125	122
S65X	105	HA41PXNT	123
66JX	106	HA41RTJPRO	124
HA23RTJ	107	HT43RTJPRO	125
HA260PX	109	Z135	126
Z80	110	ZX135/70	127
80JX	111	SX135XC	129
S80X	112	1350SJP	130
S85	113	150HAX	131
HA26RTJPRO	114	SX150	132
860SJ	116	SX180	133
HA32PX	117		

Tracked Booms

Product Code	Page Number
HINOWA 1470	137
LIGHTLIFT 15.70	138
LEO18GT	139
HINOWA 1965	140
LIGHTLIFT 20.10	141
DL21	142
X26	143

Truck Mounted

Product Code	Page Number
T22M	147
T27R	148
T32C	149

Telehandlers

Product Code	Page Number
HTL 4017	152